

Flexi-Tank™



Ultimate configuration flexibility

- 1/ Cold feed 20mm (F)
- 2/ DHW out 20mm (F)
- 3/ DHW Reticulation return 20mm (F)
- 4/ 15mm Female Gauge port
- 5/ 20mm anode port (or*)

Coils 22mm OD

Rating Coil A 21 Kw -- Coil B 14 Kw

- 6/ 20mm (M) Coil 2 in
- 7/ 20mm (M) Coil 2 out
- 8/ 20mm (M) Coil 1 In
- 9/ 20mm (M) Coil 1 out

All male coil connections are flat face for swivel union washer.

- 10/ 15mm (F) Drain valve port (or*)

*Ports 5 and 10 can be utilised as optional hydronic solar ports.

2 x Element ports, one 230V for and a second for Solar PV DC input


P 3 x sensor pockets

Off the floor feet

Easy clean gloss white shell with black cap and base.

Coils can be Pumped or Thermosyphon


Upper coil can be for input or extraction.

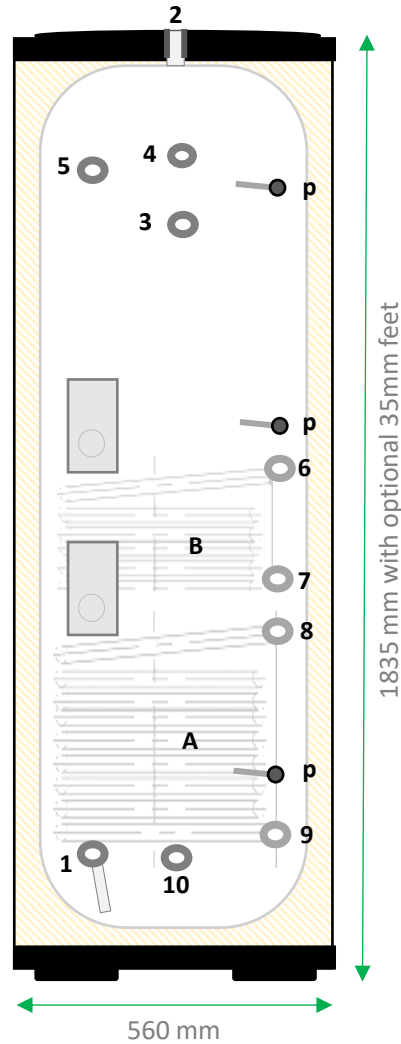

Heat IQ

Heating system solutions that offer value without compromising quality

Flexi-Tank and Combi-Tank have been designed and developed by Heat IQ to give both the installer & user competitively priced solutions that are designed to meet the specific needs of Kiwi homes efficiently and effectively.

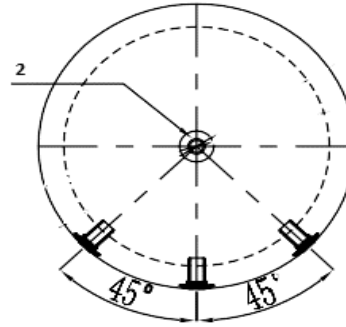

DUPLEX SS

Efficiently Compatible with.....

Gas Oil HPs Solar - Not for Wetback use.

