

# Flexi-Tank™



Ultimate configuration flexibility

- 1/ Cold feed 20mm (F)
- 2/ TPR Valve port (F)
- 3/ DHW Reticulation return port 20mm (F)
- 4/ Anode for additional protection (F)
- 5/ DHW outlet port (F)

**Coils 22mm OD**  
**Rating Coil A 21 Kw -- Coil B 14 Kw**

- 6/ 20mm (M) Coil 2 in
- 7/ 20mm (M) Coil 2 out
- 8/ 20mm (M) Coil 1 In
- 9/ 20mm (M) Coil 1 out

**All coil connections are flat face for swivel union washer.**


- 10/ 20mm (F) Drain valve port (Or\*)
- \*Ports 3 and 10 can be utilised as optional hydronic circuit ports, Eg: solar.**

**2 x Element ports, one 230V for and a second that could be used as a Solar PV DC input**

**P 3 x sensor pockets**

Off the floor feet  
 Easy clean gloss white shell with black cap and base.


**Coils can be Pumped or Thermosyphon**  
**Upper coil can be for input or extraction.**  
**Utilise both coils for max HP input**

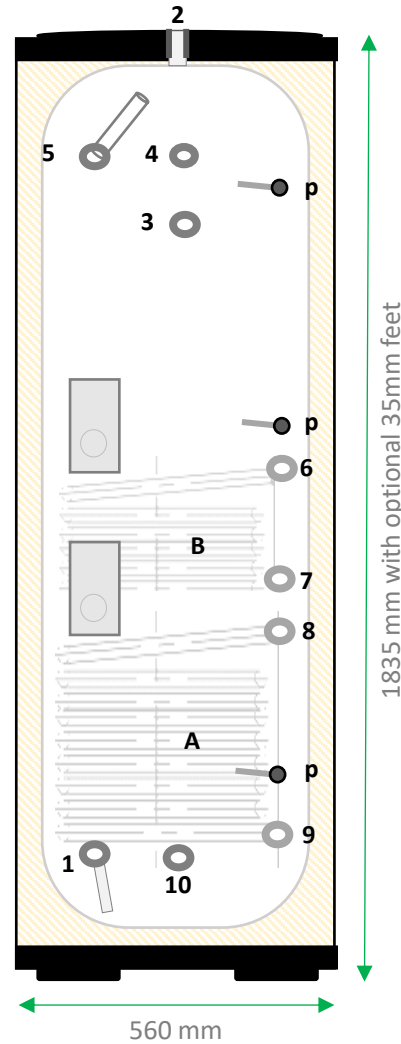

# Heat IQ

value without compromising quality

Flexi-Tank and Combi-Tank have been designed and developed by Heat IQ to give both the installer & user competitively priced solutions that are designed to meet the specific needs of Kiwi homes efficiently and effectively.



## DUPLEX SS

Efficiently Compatible with.....

Gas Oil HPs Solar - Solar PV

