


# HIQ 078 CIRCULATING PUMP

Power supply 230V/50Hz  
 Max head 8m  
 Max Pressure 10 Bar  
 Minimum pressure 0.3 Bar

Temperature rating 5 to 110 Deg C  
 Max ambient temperature 35 Deg C


Pipe connections 1 1/2" BSP Male  
 Pump body 180 mm  
 Weight 4.68Kgs

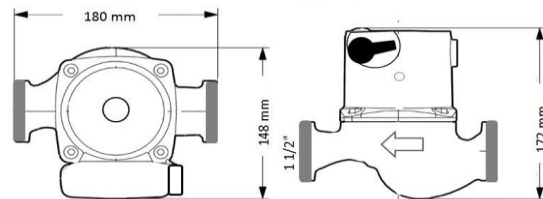

Suitable for closed and open vented applications  
**IP44 Rated**

Wiring connections should be made using 0.75mm heat resistant flex in accordance with NZ Code.

All electrical work must be carried out by a suitably qualified electrician.

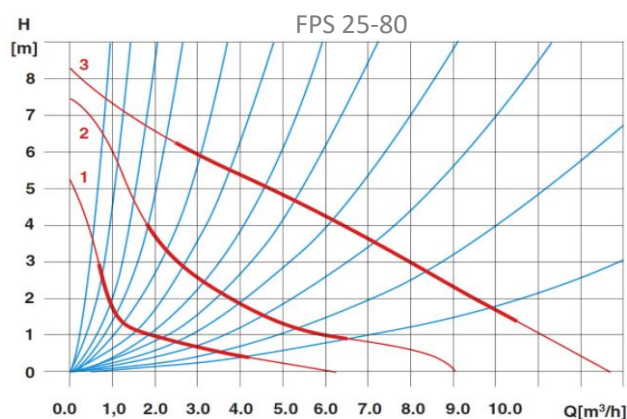

If this pump is being installed as a replacement in an existing system, the system should be thoroughly flushed to remove all traces of sediment and solids which may damage this pump.

It is Recommended that the pump is fitted so that it can be isolated via the use of inlet and outlet side isolation valves such as HIQ 108Z or HIQ 108V Available from Heat IQ



## IMPORTANT

**It is essential to ensure the pump is fitted with the body and shaft of the pump horizontal.** Under no circumstances should the body be vertical as this will damage the pump bearings and cause premature failure.

Ensure the install location allows sufficient access for wiring and use of the speed control. No part of this pump should be within 25mm of a combustible surface

**2YEAR WARRANTY**



NZ C-tick E2564



This pump is manufactured to EN292, EN60335-1 and EN60335-2-51

Tradepoint Ltd Heat IQ PO Box 530 Whanganui New Zealand sales@heatiq.co.nz