

108SM GPA25-611-130.

High efficiency circulating pump for use in central heating systems.

Compliant with the latest European Union ERP Ratings.

Specifications

Body type Cast Iron

Body size 130mm between faces

Pipe Connections 1 1/2"

Max Operating pressure 8 Bar (10 bar test pressure)

Operating temperature 2-110°C

Max Head 6m

Max flow 3.1m³/hr

Power 230V 50/60Hz - C tick CE
(0.75m power cord is included)

Power consumption 5 to 45w - EU energy rating **A**

Insulation class IP44

Sound Below 41Db



Weight 2.2Kgs

Warranty 2 Years from DOP



**2YEAR
WARRANTY**

Performance

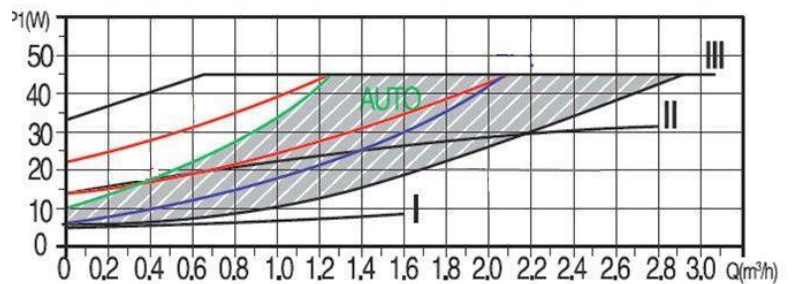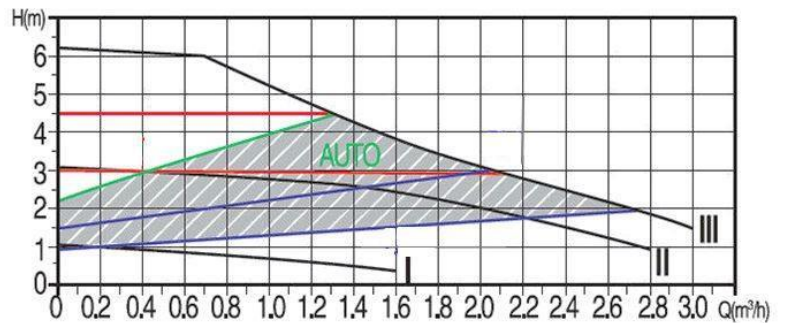

For more central heating product including, Heat source Appliances, Radiators, Pumps, Valves, Manifolds & Control components, see our full range on line at www.heatiq.co.nz