

HIQ 108 CIRCULATING PUMP

Power supply 230V/50Hz
 Max head 6m
 Max Pressure 10 Bar
 Minimum pressure 0.3 Bar



Temperature rating 5 to 110 Deg C
 Max ambient temperature 35 Deg C

Pipe connections 1 1/2" BSP Male
 Pump body 130 mm
 Weight 2.58 Kgs

Suitable for closed and open vented applications

Wiring connections should be made using 0.75mm heat resistant flex in accordance with NZ Code.

All electrical work must be carried out by a suitably qualified electrician.

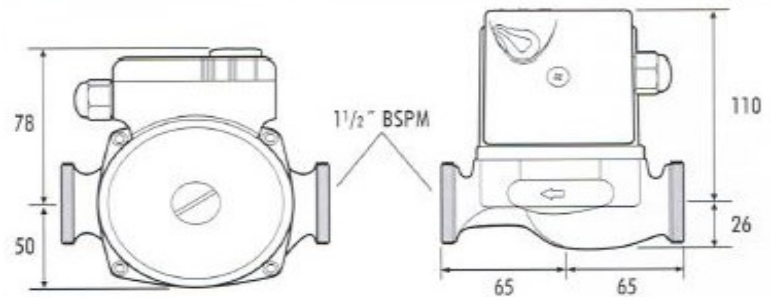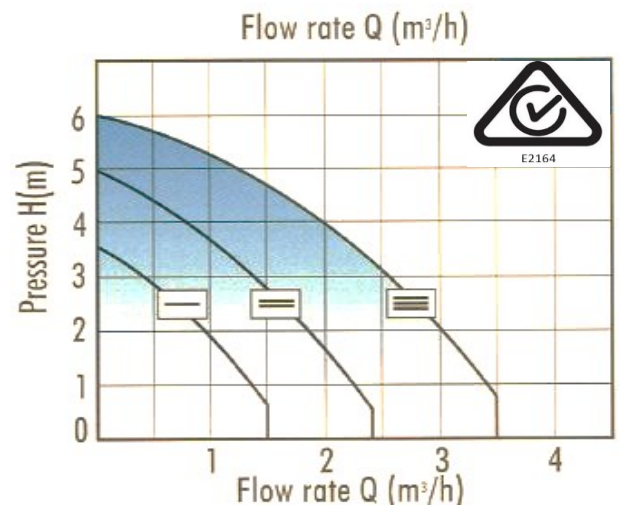

Before installation the system if existing should be thoroughly flushed to remove all traces of sediment and solids.

It is Recommended that the pump is fitted so that it can be isolated via use of inlet and outlet side isolation valves such as HIQ

It is essential to ensure the pump is fitted with the body and shaft of the pump either horizontal or slightly above the horizontal position Under no circumstances should the body be vertical as this will damage the pump bearings and cause premature failure.

Ensure the install location allows sufficient access for wiring and use of the speed control.

No part of this pump should be within 25mm of a combustible surface



NZ C-tick E2564

**2YEAR
WARRANTY**



HeatIQ
 A specialist division of TradePoint Ltd

This pump is manufactured to EN292, EN60335-1 and EN60335-2-51

TradePoint Ltd Heat IQ PO Box 530 Whanganui New Zealand sales@heatiq.co.nz