

MC6 APP

Connection Guide (Android)

Contents

3 Notes

4-11 Connect MC6 to Wifi

12-32 Connect MC6 to APP

12-17 Method 1: Manual Entry of MAC

18-25 Method 2: SmartConfig

26-32 Method 3: Scanning Thermostat QR Code

Notes :


1. The WiFi router must be 2.4G.
2. The router setting must be DHCP.
3. If the App fails to pair with the router, please check the router's firewall settings and try to turn off the firewall then try again.
4. Make sure the app and thermostat connect to the same wifi.

How to connect MC6 to wifi:


1 On the main interface of MC6, please click “setting” icon pointed by the red arrow.




2 Find “Network Setting” item in the setting menu and click it.

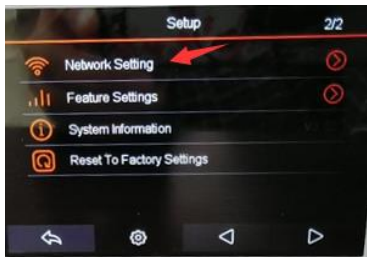

3 Click “WI-FI Setup” item pointed by the red arrow in this interface.

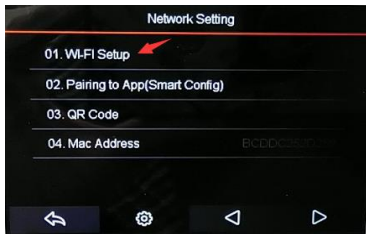

4 Select the wifi MC6 is to connect to in this interface by clicking on the related item.

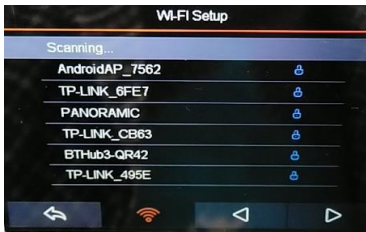


5 Enter the password in the position pointed by the red arrow, then click “join” in the keyboard below.




6 Return back to the main interface and observe the wifi icon pointed by the red arrow, if it is keep flicker, it means the wifi connecting is under processing; When it is displayed completely and stays still as shown in the picture below, the wifi connection is successful.



7 If you want to switch to other wifi connection, please click the current connected wifi pointed by the red arrow.

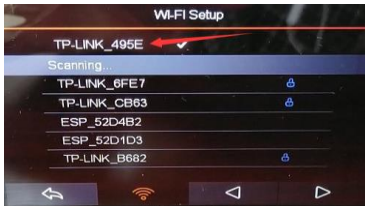

8 Click “Forget this network” pointed by the red arrow, then the wifi list will be displayed again, it will allow you to select new wifi from the list as per your needs.

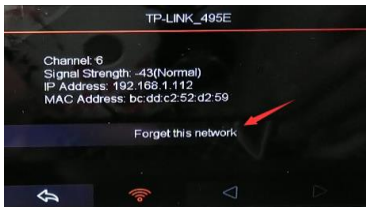

Three Connection Methods


Method 1: Manual Entry of MAC

1 Please first start the APP, and click “+” icon pointed by the red arrow on the interface of the APP.



Double tap to turn ON or turn OFF Device

2 Please select the type of thermostat to be paired by clicking on the relevant radio button, and then click the "NEXT" button pointed by the red arrow.

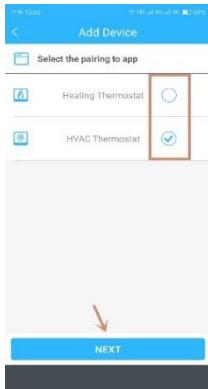

3 Please define a name for the device, and you can also select a location as the device name from the location list marked by the red rectangle box . Then Click the "Next" button at the bottom of the interface.

Top: 10:11:22 AM, 7/10/2016, 10:11:22 AM, 7/10/2016

< Add device location

Device Name TV Room

Select device location

Study	TV Room ☒	Library
Living Room	Dining Room	Kitchen
Kitchen/ Dining	Hall	Bathroom
Bedroom 1	Bedroom 2	Bedroom 3
Bedroom 4	Master Bedroom	Guest Bedroom
Dressing Room 1	Dressing Room 2	Shower room
First Floor	Toilet	Basement
Play Room	Back Kitchen	Plant Room
Store room	Laundry	Porch
Office	Office 1	Office 2

NEXT

4 Find out "MAC Address" option in thermostat's setting menu and you will see a string of characters marked by the red rectangle.



5 Select "Manual Entry" method by clicking on the relevant radio button and fill in the text box below with the MAC address, then click the "NEXT" button.

TIME 2:39 100% 40% 40% 42%

< Add Device


Select the pairing to app

	Scan QR Code	☐
	Smart Config	☐
	Manual Entry	☒

BCDDC252D259

NEXT


6 The thermostat will be successfully connected to the APP as shown in the picture.



Double tap to turn ON or turn OFF Device


Method 2: SmartConfig

1 Please first start the APP, and click “+” icon pointed by the red arrow on the interface of the APP.



Double tap to turn ON or turn OFF Device

2 Please select the type of the thermostat to be paired by clicking on the relevant radio button, then click the "NEXT" button pointed by the red arrow.

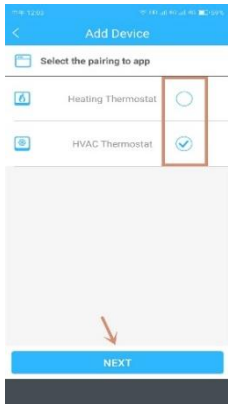


3 Please define a name for the device, and you can either select a location as the device name from the location list marked by the red rectangle box. Then Click the "NEXT" button at the bottom of the interface.

The screenshot shows a mobile application interface for adding a device location. At the top, there is a blue header bar with a back arrow, the text "Add device location", and status bar information (Time: 12:28, Signal, Wi-Fi, and Battery icons). Below the header, there is a "Device Name" field with a house icon and the text "TV Room". Below this is a "Select device location" section with a location pin icon. A red rectangle highlights a grid of room names. Below the grid is a blue "NEXT" button.

Study	TV Room ☒	Library
Living Room	Dining Room	Kitchen
Kitchen/ Dining	Hall	Bathroom
Bedroom 1	Bedroom 2	Bedroom 3
Bedroom 4	Master Bedroom	Guest Bedroom
Dressing Room 1	Dressing Room 2	Shower room
First Floor	Toilet	Basement
Play Room	Back Kitchen	Plant Room
Store room	Laundry	Porch
Office	Office 1	Office 2

NEXT

4 Select "Smart Config" method by clicking on the relevant radio button. Then click the "NEXT" button.




5 Generally, SSID can be automatically got in accordance with the wifi connection of your mobile phone. You have just to fill in the password. Then Click "CONNECT" button pointed by the red arrow.




6 Find out "pairing to APP (Smart Config)" option in thermostat's setting menu and click it.



7 For initial connection, It will take 2-3 minutes.

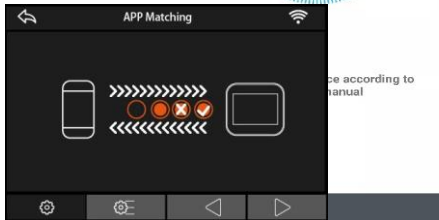


8 The thermostat will be successfully connected to the APP as shown in the picture.




Double tap to turn ON or turn OFF Device

Methold 3: Scanning thermostat QR code

1 Please first start the APP, and click “+” icon pointed by the red arrow on the interface of the APP.

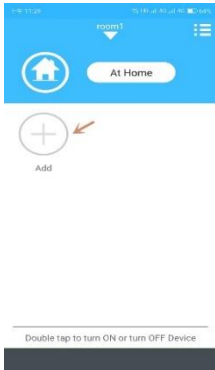

2 Please select the type of thermostat to be paired by clicking on the relevant radio button, then click the "NEXT" button pointed by the red arrow.

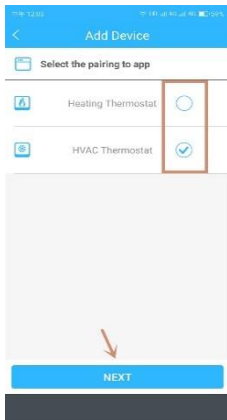

3 Please define a name for the device, and you can either select a location as the device name from the location list marked by the red rectangle box. Then Click the "NEXT" button at the bottom of the interface.

7:19 12/24 75% 10.0 ul 40.0 ul 40.0 50/54%

< Add device location


Device Name TV Room

Select device location

Study	TV Room	Library
Living Room	Dining Room	Kitchen
Kitchen/Dining	Hall	Bathroom
Bedroom 1	Bedroom 2	Bedroom 3
Bedroom 4	Master Bedroom	Guest Bedroom
Dressing Room 1	Dressing Room 2	Shower room
First Floor	Toilet	Basement
Play Room	Back Kitchen	Plant Room
Store room	Laundry	Porch
Office	Office 1	Office 2

NEXT

4 Select "Scan QR Code" method by clicking on the relevant radio button. Then click the "NEXT" button.




5 Find out "System Information" option in thermostat's setting menu and click it, and then a QR code will be displayed. Please scan the QR code with the APP.



6 Please scan the QR code with the APP. After the successful scanning of the QR code, it will automatically go to the next step.



7 The thermostat will be successfully connected to the APP as shown in the picture.



Double tap to turn ON or turn OFF Device