



Duplex Stainless steel DHW Cylinders

3 models to suit your requirements

210L single coil

250L Dual Coil

300L Dual Coil

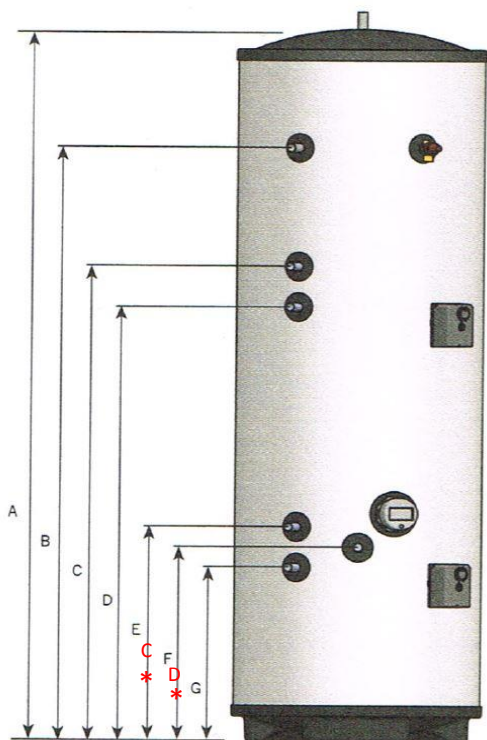

Duplex Stainless inner cylinder with rapid gain Duplex coils for rapid heat recovery

Twin coil models supplied with a second coil for use with a secondary heat source, eg: solar, or additional appliance.

The lower of the two coils has a larger surface area to maximise suitability for input from low grade heat sources

Coils are not suitable for thermosyphon

Thermostats are factory fitted for both coils and an element is provided for back up heating

All models include a secondary return connection for reticulated (pumped) DHW.

Superior spigot connections allow greater insulation performance and minimise risk of leakage unseen at the connections

Cylinders include

TPR valve 700KPA

3Kw Element (Incaloy)

Coil thermostats

Inlet valve group 3 Bar with 600 KPa relief

Pressure vessel to minimise relief

BSP connection kit



Valve Requirements - Not included

* Tempering valve in accordance with G12 limited at 55 Deg C

Seismic restraint -

we recommend the Simplefix system - Requires 3 straps kit

We also advise the use of a cylinder drain tray

Twin Coil	250L	300L	Single coil	210L
A Height (note top hot outlet)	1767	2077	A	1517
B Secondary rtn	1473	1783	B	1223
C Primary coil upper connection	1078	1388	C	* 532
D Primary coil lower connection	978	1288	D	* 482
E Renewable coil upper connection	532	532	E	432
F Cold inlet connection	482	482		none
G Renewable coil upper connection	432	432		none
Primary coil rating at 15L per Min	20.2	21		19.9
Second coil (renewables)	22	20.7		N/A

Warranty excludes incorrect installation or specific failure due to water quality

Imported and Distributed by Tradepoint (heatIQ) Ltd 11 Rakau Road Wanganui New Zealand

PO Box 530 0064 6 3447392 sales@heatiq.co.nz www.heatiq.co.nz