

# ecofloor The underfloor you can fit under other floors


The Ecofloor system allows underfloor heating to be placed under wooden floors beneath a floating floor onto an existing floor.

Ecofloor Polyurethane XPS backing board is 25mm thick and pre cut to accommodate spreader plates and or 16mm UFH pipe.

Spreader plates can be used with or without XPS board In all cases we strongly recommend insulation of some kind used below spreader plates.

The XPS board can be cut easily and neatly using a knife allowing boards to be fitted between joists.

Tiling may be applied using 6mm cement fibre backing board fixed directly to the system with flexible two part tile adhesive

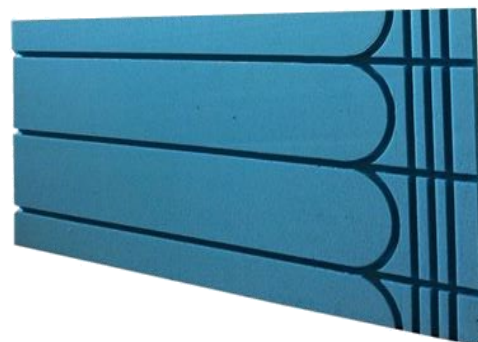

**Aluminium spreader plate** 1000 x 390 ( 200C ) **HIQ 621**

**XPS Polyurethane Insulated board** 1200 x 600 x 25mm **HIQ 620**

**Foil tape - for joints** **HIQ 622**



**Under-fit**

On or between joists



**Over-lay**

With floating wood floor or screed