


Pipe


Superior Butt welded multilayer - Pex. Aluminium. Pex

Multilayer coils

O/D	Coil Length	Order code
16mm	300m	HIQ 089-3
16mm	100m	HIQ 890
16mm	50m	HIQ 890.5
16mm	25m	HIQ 890.25
20mm	100m	HIQ 891
20mm	50m	HIQ 891.5
20mm	25m	HIQ 891.25
25mm	100m	HIQ 892
25mm	50m	HIQ 892.5
25mm	25m	HIQ 892.25
32mm	50m	HIQ 893
32mm	25m	HIQ 893.25



Butt welded aluminum core is more durable, easier to bend and has less recoil than lap jointed pipe. **Beware of lesser quality lap jointed multilayer pipe** 

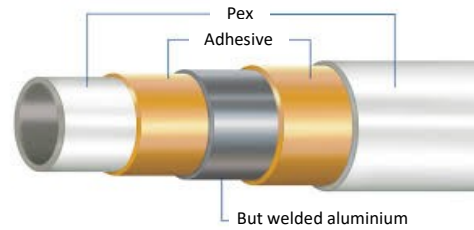



Straight Male BSP
 16mm x 1/2" HIQ 830
 20mm x 1/2" HIQ 831
 20 x 3/4" HIQ 832
 25 x 3/4" HIQ 833
 25mm x 1" HIQ 834
 32mm x 1" HIQ 835



Swivel unions
 16mm x 1/2" HIQ 867
 20mm x 3/4" HIQ 869
 25 x 3/4" HIQ 868
 32mm x 1" HIQ 870



Female BSP branch tee's
 16mm x 1/2" x 16mm HIQ 845
 20mm x 1/2" x 20mm HIQ 846
 25mm x 3/4" x 25mm HIQ 847



Male BSP branch
 16mm x 1/2" x 16mm HIQ 840
 20mm x 3/4" x 20mm HIQ 841



Male BSP elbows
 16mm x 1/2" HIQ 810
 20mm x 3/4" HIQ 811
 25mm X 1" HIQ 812



Female BSP elbows
 16mm x 1/2" HIQ 820
 20mm x 3/4" HIQ 821
 25mm x 1" HIQ 822
 32mm x 1" HIQ 823

20/25mm Euro-cone connector


1" 25mm BSP compression fittings - to multilayer pipe

20mm Multilayer HIQ 486


25mm multilayer HIQ 487



"Because quality counts"

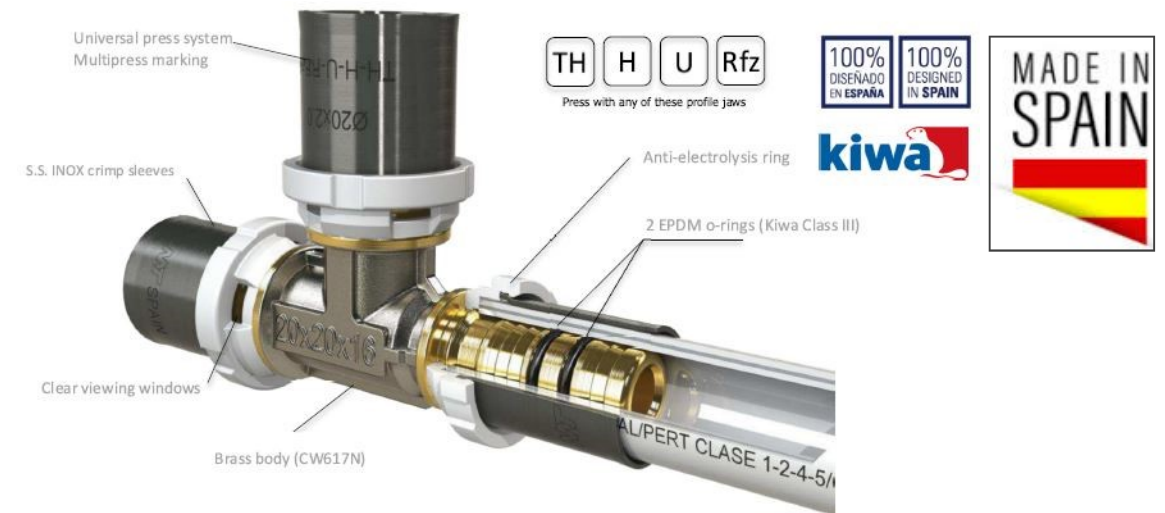

Press fittings you can crimp press with 4 different jaw types. TH, U, H & RFz

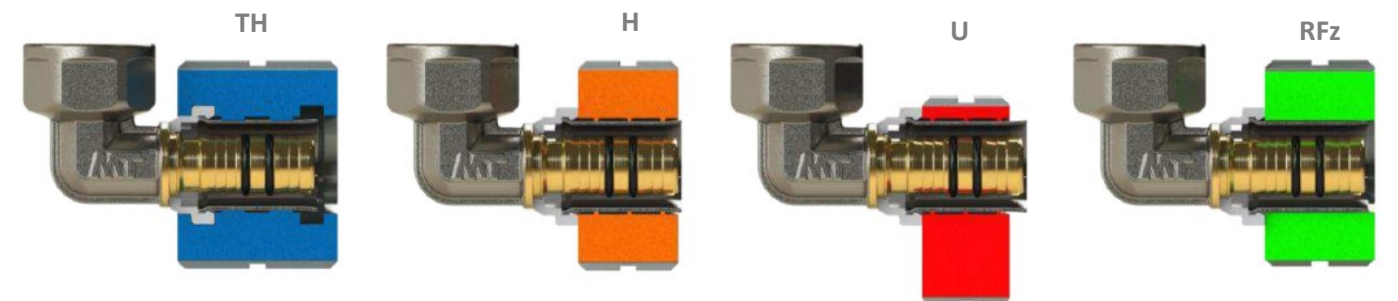

No need to re tool : get started with MT & Save \$

If you have a **Rems, Milwaukee, Rigid, De Walt, Zupper, Hilti, Gerbit, Klauke**, or other power tool with U or TH jaws for 16/20/25/32mm then you can most likely

Use Your existing tool with the **MT** system.

MT is one of Europe's primary manufacturers of stainless & brass pipe fittings to the domestic & commercial sector.

With a network of distribution partners a second manufacturing facility in south America. **MT fittings are sold in 40 Countries, on 4 continents.**


MT Press Fittings manufactured in brass CW617N according to UNE EN 12165

Guaranteed sealing with **certified Kiwa class III EDPM O-rings**

Suitable for central heating applications with Max 95 Degrees C @ 10 Bar



Designed manufactured & independently tested MT fittings are certified compliant with UNE EN ISO 21003.

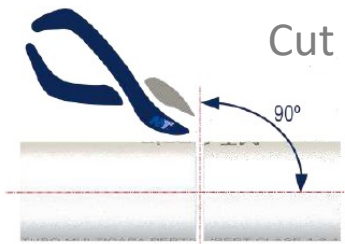

Cut



Gauge & Ream



Insert



Check

Silicone lube spray may be used as required to aid engagement. Never use oil based lubricants

Place and press



Easy as !



The press fitting you can crimp press with 4 different jaw types. TH, U, H & RFz



Joiner's

- 16mm HIQ 801
- 20mm HIQ 802
- 25mm HIQ 803
- 32mm HIQ 804



Equal tee's

- 16mm HIQ 850
- 20mm HIQ 851
- 25mm HIQ 852
- 32mm HIQ 853



Elbows

- 16mm HIQ 815
- 20mm HIQ 816
- 25mm HIQ 817
- 32mm HIQ 818



Reducers

- 16mm x 20 mm HIQ 806
- 20mm x 25mm HIQ 807
- 25mm x 32mm HIQ 808
- 25mm x 16mm HIQ 809



Wingback elbows

- 16 mm HIQ 825
- 20 mm HIQ 826
- 20-3/4 HIQ 827
- 16 x 16 1/2 HIQ 828



Reducing tee's

- | | | | | | |
|--------------|---------|-------------|---------|-------------|---------|
| 20-16 -20 mm | HIQ 855 | 25-20-20 mm | HIQ 860 | 25-20-25 mm | HIQ 859 |
| 20-16-16 mm | HIQ 856 | 32-20-32 mm | HIQ 861 | 32-16-32 mm | HIQ 864 |
| 20-20-16 mm | HIQ 857 | 32-25-32 mm | HIQ 862 | 25-16-16 mm | HIQ 865 |
| 25-16-25 mm | HIQ 858 | 32-20-20 mm | HIQ 863 | 32-25-25 mm | HIQ 866 |

Premium European press fittings...
At New Zealand's Sharpest prices



True quality
Butt welded pipe