

# UP/DOWN – SALT WATER SERIES




## PRODUCT INFORMATION

Order Code	Power	Lumens	CCT	Body Material	Body Colour	CRI (Ra)	IP Rating	Beam Angle	Size	SKU Number	Carton Qty	Weight
SCI-2300	6W	560	3000k	316 S/S Marine Grade	Polished stainless steel	82	65	40°	210 x 85mm	9376047816722	10	12.7kg
SCI-2300-5	6W	600	5000k	316 S/S Marine Grade	Polished stainless steel	82	65	40°	210 x 85mm	9376047818603	10	12.7kg
SCI-2320	6W	560	3000k	Anodised Aluminium Titanium	Polished Aluminium	82	65	40°	210 x 85mm	9376047816814	10	7.3kg
SCI-2320-5	6W	600	5000k	Anodised Aluminium Titanium	Polished Aluminium	82	65	40°	210 x 85mm	9376047818641	10	7.3kg
SCI-2340	6W	560	3000k	Aluminium Poly Powder Coated Black	Powder Coated Matt Black	82	65	40°	210 x 85mm	9376047816869	10	7.3kg
SCI-2340-5	6W	600	5000k	Aluminium poly powder coated black	Powder Coated Matt Black	82	65	40°	210 x 85mm	9376047818689	10	7.3kg
SCI-2380	6W	560	3000k	Aluminium poly powder coated white	Powder Coated Matt White	82	65	40°	210 x 85mm	9376047818764	10	7.3kg
SCI-2380-5	6W	600	5000k	Aluminium poly powder coated white	Powder Coated Matt White	82	65	40°	210 x 85mm	9376047818801	10	7.3kg
SCI-2360	6W	560	3000k	Solid Copper	Copper	82	65	40°	210 x 85mm	9376047816906	10	15. kg
SCI-2360-5	6W	600	5000k	Solid Copper	Copper	82	65	40°	210 x 85mm	9376047818726	10	15. kg

Voltage	Frequency HZ	IK Rating	Diffuser	Dimmable	Emergency	Sensor	Mounting Type	Wiring Type
240v	50Hz	N/A	Glass	N/A	N/A	N/A	Ceiling / Wall	Hardwire

## DIMENSIONS

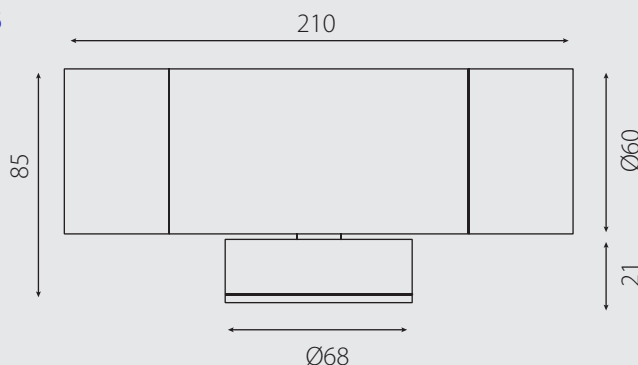

## FEATURES:

Up/down wall pillar light

Long body

Toughened glass

Large terminal blocks

2x6w LED COB GU10 globe

High output reflector to maximise light

IP65

12v option available

3000k / 5000k option available

