

AT3013

AT3013/26/TRI/EM

Opal acrylic LED oyster Tri-colour

Features

- Easy to install
- Energy Efficient
- Insect Resistant seal
- Twist and lock mechanism



ORDERING INFORMATION

Order code	11275
Description	26W 395mm Opal Acrylic LED Oyster - TRI Colour - with Emergency gear
Driver Type	Fixed output
Item Code	AT3013/26/TRI/EM

MECHANICAL

Adjustability	Fixed
Body Material	Steel
Diffuser Material	Acrylic
Product Finish	Powdercoated
Fitting Colour	White
Installation Type	Surface mount
IP Rating	IP20

ELECTRICAL

Electrical Rating	Class I
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Switch Type	Inline
Working Temp Range	-5 to 40 °C

LAMP

Beam Angle	120 °
Bulb Type	Inbuilt
CCT Configuration	TRI-CCT
CRI	>80
LED Type	Diffused

COLOUR TEMPERATURE

Warm White (3000 K)	1760 lm
Cool White (4000 K)	2005 lm
DayLight (5000 K)	1830 lm

DRIVER

Dimmable	No
Driver Included	Yes
Integrated Driver	No
Driver Mode	Constant Current
Driver Type	Fixed output
Wiring Type	Re-wireable terminal block (3 pin)

EMERGENCY (EM SUFFIX)

Replacement Battery Code	01300
Emergency Classification	D20
Emergency Duration	120 mins
Emergency Mode	Maintained

COMPLIANCE

Standards

AS/NZS 60598.1
 AS 60598.2.22
 AS/NZS 61347.1
 AS/NZS 61347.2.13
 AS CISPR 15
 AS/NZS 2293.3

WARRANTY

Commercial Use Warranty 3 RTB (Total 3 Years)

Domestic Use Warranty 3 (Yr) RTB

VIP Warranty 2 Onsite, 3 RTB (Total 5 Years)

VIP warranty is available to registered users and is subjected to additional terms and conditions.


DIMENSIONS

Product Diameter 395 mm

Product Height 110 mm


LINE DRAWINGS

AT3013/26/TRI

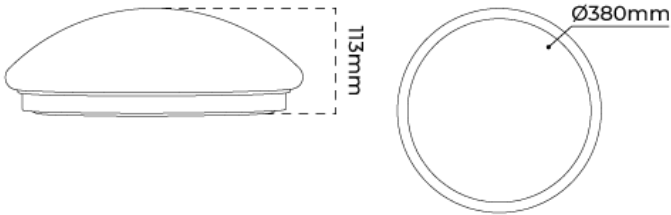


PHOTOMETRICS

AT3013/26/TRI/5000K

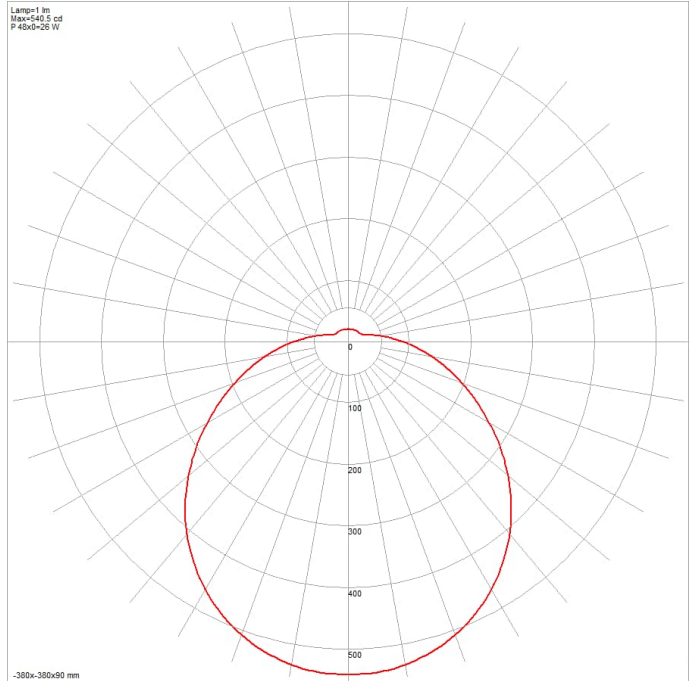

AT3013/26/TRI/3000K

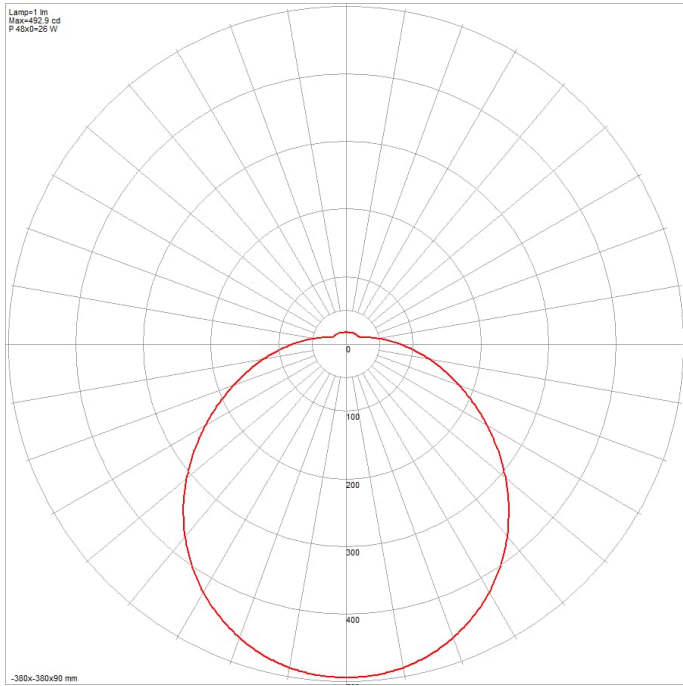

AT3013/26/TRI/4000K

