

TWIN ADJUSTABLE - SALT WATER SERIES



Stainless Steel



Aluminium



Black



White




Copper

PRODUCT INFORMATION

Order Code	Power	Lumens	CCT	Body Material	Body Colour	CRI (Ra)	IP Rating	Beam Angle	Size	SKU Number	Carton Qty	Weight
SCI-2303	6W	560	3000k	316 S/S Marine Grade	Polished Stainless Steel	82	65	40°	175 x 100mm	9376047816760	10	17.2kg
SCI-2303-5	6W	600	5000k	316 S/S Marine Grade	Polished Stainless Steel	82	65	40°	175 x 100mm	9376047818634	10	17.2kg
SCI-2323	6W	560	3000k	Anodised Aluminium Titanium	Polished Aluminium	82	65	40°	175 x 100mm	9376047816845	10	10kg
SCI-2323-5	6W	600	5000k	Anodised Aluminium Titanium	Polished Aluminium	82	65	40°	175 x 100mm	9376047818672	10	10kg
SCI-2343	6W	560	3000k	Aluminium Poly Powder Coated Black	Powder Coated Matt Black	82	65	40°	175 x 100mm	9376047816890	10	10kg
SCI-2343-5	6W	600	5000k	Aluminium Poly Powder Coated Black	Powder Coated Matt Black	82	65	40°	175 x 100mm	9376047818719	10	10kg
SCI-2383	6W	560	3000k	Aluminium Poly Powder Coated White	Powder Coated Matt White	82	65	40°	175 x 100mm	9376047818795	10	10kg
SCI-2383-5	6W	600	5000k	Aluminium Poly Powder Coated White	Powder Coated Matt White	82	65	40°	175 x 100mm	9376047818832	10	10kg
SCI-2363	6W	560	3000k	Solid Copper	Copper	82	65	40°	175 x 100mm	9376047816937	10	19kg
SCI-2363-5	6W	600	5000k	Solid Copper	Copper	82	65	40°	175 x 100mm	9376047818757	10	19kg

Voltage	Frequency HZ	IK Rating	Diffuser	Dimmable	Emergency	Sensor	Mounting Type	Wiring Type
240v	50Hz	N/A	Glass	N/A	N/A	N/A	Ceiling / Wall	Hardwire

DIMENSIONS

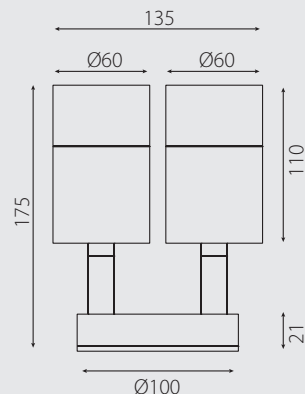

FEATURES:

Twin adjustable wall pillar light

Long body

Toughened glass

Large terminal blocks

2x6w LED COB GU10 globe

High output reflector to maximise light

IP65

12v option available

3000k / 5000k option available

3000 K	5000 K	IP65
240VAC	Optional 12V	