


# PANEL LIGHT

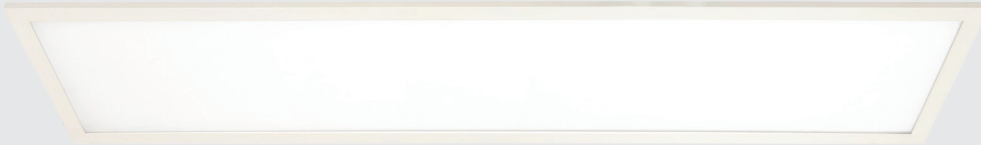



## PRODUCT INFORMATION

Order Code	Power	Lumens	CCT	Body Colour	CRI (Ra)	IP Rating	Beam Angle	Dimmable	Emergency	Sensor	Size	SKU Number	Carton Qty	Weight
SCI-8101	20w	2150	4000k	White	82	20	120°	Optional	Optional	Optional	595 x 295mm	9376047818429	10	17kg

Order Code	Plasterboard Frame
SCI-8119	Low profile white frame to suit 20w LED panel 300 x 600mm

Voltage	Frequency HZ	IK Rating	Diffuser	Body Material	Mounting Type	Wiring Type
240v	50Hz	N/A	Frosted	Aluminium	Ceiling / Wall	Hard Wire / Flex & Plug

## DIMENSIONS

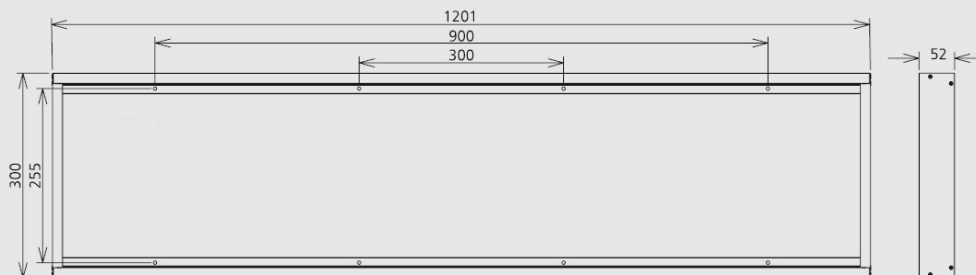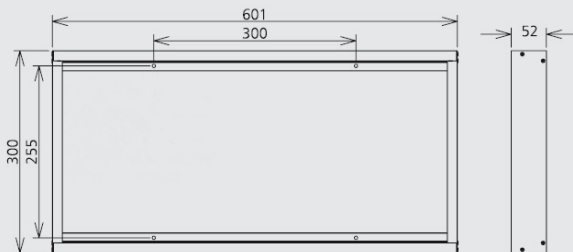

## FEATURES:

Optional Triac dimming

Optional 1-10v dimming

White Frame Finish

High efficiency opal polystyrene back diffuser

Extruded aluminium frame

Powder coated finish

T-Bar Ceiling Recessed installation

Plaster ceiling recessed installation

1.2m flex & 2 pin plug

IP20 indoor use only

