

APIS SERIES

Exterior LED Surface Mounted Up/Down Wall Lights




PRODUCT FEATURES

- Exterior LED surface mounted up/down wall lights
- Input voltage range: 220-240V AC 50/60Hz
- Material: PC
- LED chips: 50pcs 2835
- Ambient temp: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors




APIS1

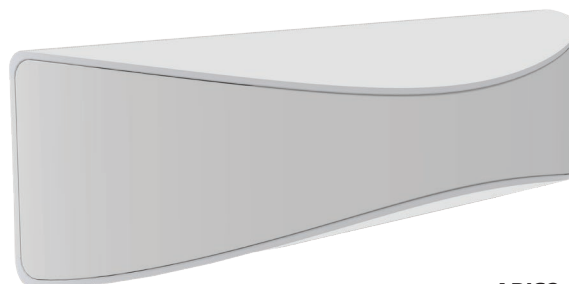

APIS2

 30,000hr Lifetime	 120° Beam Angle	IP65 Rated	3YEAR Replacement Warranty
---	--	----------------------	---

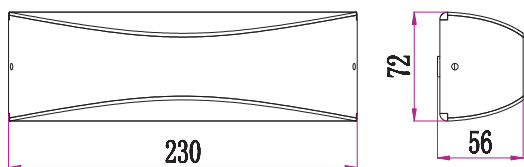

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	WEIGHT (KG)	BOX (CM)	CARTON QTY
APIS1	WALL LED S/M Dark Grey Curved UP/Dn	3000	275.75	10	≥80	0.5	24X8.7X7.2	1/8
APIS2	WALL LED S/M Matt WH Curved UP/Dn	3000	275.75	10	≥80	0.5	24X8.7X7.2	1/8