

SUMMARY

The Ark Pro is a robust highbay solution delivering at an industry leading 200Lm/W output, ideal for high ceiling or high luminance, commercial and industrial applications. It features Multi-Watt Selectable technology, giving installers the choice of 5 wattages in 1 fitting for maximum lumen output flexibility. Built to last, this clever compact highbay is rated to IP65 and IK08. The Ark Pro can be easily transformed into a motion controlled highbay with the optional plug-and-play microwave motion sensor and remote control.



			<p>✓ VEET Approved</p> <p>✓ IPART Approved</p>
--	--	--	--

PRODUCT DATA

Order Code	333335				
Voltage	220-240V				
Wattage	Multi-Watt Selectable				
	150W	125W	100W	90W	70W
Lumen Output	30000Lm	25000Lm	20000Lm	18000Lm	14000Lm
CCT	5000K				
IP Rating	IP65				
IK Rating	IK08				
Beam Angle	110°				
Light Source	SMD Chips				
Driver	Integrated Flicker-Free				
Dimmable	Yes. 0-10V				
Connection	1.5m flex & plug				
Fitting Colour	Black				
PF	0.9				
Net Weight (kg)	3.57				
Lifetime L70B50	50,000 hours				
Warranty	5 years				


OPTIONAL ACCESSORIES

ITEM	ORDER CODE	ITEM	ORDER CODE
Plug-&-Play MW Sensor	333409	70° PC Diffuser Cover	332038
Remote Control	213979	Surface Mounting Bracket	333379
70° Aluminium Reflector	333259	Pole Mounting Bracket	333369
90° Aluminium Reflector	333199	0-10V Dimming Cable	333389
70° PC Diffuser	333319		



SUMMARY

The Ark Pro is a robust highbay solution delivering at an industry leading 200Lm/W output, ideal for high ceiling or high luminance, commercial and industrial applications. It features Multi-Watt Selectable technology, giving installers the choice of 5 wattages in 1 fitting for maximum lumen output flexibility. Built to last, this clever compact highbay is rated to IP65 and IK08. The Ark Pro can be easily transformed into a motion controlled highbay with the optional plug-and-play microwave motion sensor and remote control.

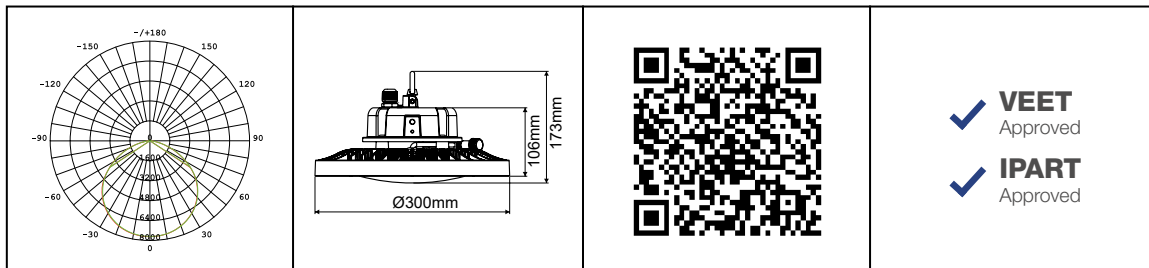

PRODUCT DATA

Order Code	333334				
Voltage	220-240V				
Wattage	Multi-Watt Selectable				
	150W	125W	100W	90W	70W
Lumen Output	30000Lm	25000Lm	20000Lm	18000Lm	14000Lm
CCT	4000K				
IP Rating	IP65				
IK Rating	IK08				
Beam Angle	110°				
Light Source	SMD Chips				
Driver	Integrated Flicker-Free				
Dimmable	Yes. 0-10V				
Connection	1.5m flex & plug				
Fitting Colour	Black				
PF	0.9				
Net Weight (kg)	3.57				
Lifetime L70B50	50,000 hours				
Warranty	5 years				

OPTIONAL ACCESSORIES

ITEM	ORDER CODE	ITEM	ORDER CODE
Plug-&-Play MW Sensor	333409	70° PC Diffuser Cover	332038
Remote Control	213979	Surface Mounting Bracket	333379
70° Aluminium Reflector	333259	Pole Mounting Bracket	333369
90° Aluminium Reflector	333199	0-10V Dimming Cable	333389
70° PC Diffuser	333319		

4000K

MULTI WATT

IP65

IK08

DIMMABLE

FLICKER FREE

CRI 70



5 YEAR WARRANTY

Features



- Multi-Watt
- High lumen efficacy @150Lm/W
- 0-10V dimmable
- Die-cast aluminium construction

Applications

Commercial, Industrial, Facilities,
Warehouses, Centres, Airport Hangers

Warranty

5 years

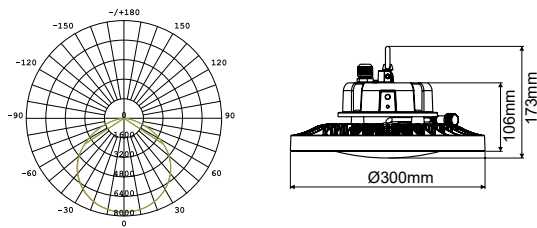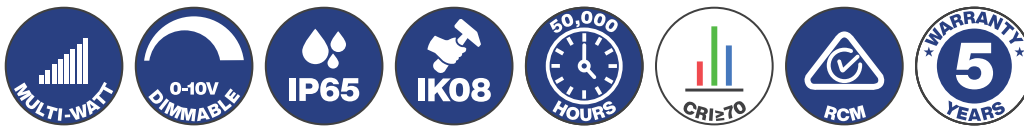

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Weight (kg)
333324	150 / 125 / 100 / 90 / 70W	4000K	22,500 - 10,500Lm*	110°	3.57
333325	150 / 125 / 100 / 90 / 70W	5000K	22,500 - 10,500Lm*	110°	3.57
333545	200 / 150 / 135 / 120 / 95W	5000K	30,000 - 14,000Lm**	110°	3.57

[1] Operating temperature: -30°C~+50°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] *22,500 / 18,900 / 15,000 / 13,500 / 10,500Lm

[5] **30,000 / 22,500 / 20,000 / 18,000 / 14,000Lm

Optional Accessories

Item	Order Code
Plug-&-Play MW Sensor	333409
Remote Control	213979
70° Aluminium Reflector	333259
90° Aluminium Reflector	333199
70° PC Diffuser	333319
70° PC Diffuser Cover	332038
Surface Mounting Bracket	333379
Pole Mounting Bracket	333369
0-10V Dimming Cable	333389

Specifications are for reference only and may be changed without prior notice.

