

AT9251 IP67

AT9251/WW/IP67/5M

LED Strip with cable - IP67 - 4.8W/m

Features

- UV stabilized Silicon sleeve which provides excellent mechanical and IP67 protection.
- Ideal for outdoor use or in areas where mechanical protection is required without the need for additional extrusion
- A Flexible Silicon sleeve allows the strip to bend around gradual corners.
- Superior efficacy and Colour Rendering Index (CRI) >90
- Sealed ends with silicon boots
- Superior 24V design
- 60,000 hour LED life
- Supplied with 3M adhesive tape
- No additional heatsinking required, however heatsinking can be used to extend the products service life
- Large range of accessories and extrusions



ORDERING INFORMATION

Order code	16556
Description	4.8W/m IP67 5m LED Strip with cable - WW
Item Code	AT9251/WW/IP67/5M

MECHANICAL

IP Rating	IP67
------------------	------

ELECTRICAL

Electrical Rating	Class III
Input voltage	24Vdc
Watts Per Meter (W/m)	4.8
Working Temp Range	40 °C

LAMP

Macadam Steps (SDCM)	3-step MacAdam Ellipse
Beam Angle	120 °
CCT Configuration	Single
CRI	>90
Lamp/LED voltage	24 V
LED's per meter	64
Lumens /m	520 lm/m

System Efficiency

108 lm/W

LED LIFETIME

LED Lifetime >60000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

Ambient Temp (°C)	25 °C	40 °C
L80B10	52000 hrs	52000 hrs
L70B50	>60000 hrs	>60000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

TM-21 Test Hours 10000 hrs

COLOUR TEMPERATURE

CCT	3000 K
CCT Colour	Warm White
LED Wattage	24 W
System Lumens	2600 lm

All photometric data has a tolerance of ±10%.

COMPLIANCE

Product Design Life	10 years
----------------------------	----------

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Daily Use	12 hrs
------------------	--------

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

Standards	AS/NZS 60598.1 IEC 62031
------------------	-----------------------------

WARRANTY

Commercial Use Warranty	2 RTB (Total 2 Years)
--------------------------------	-----------------------

Domestic Use Warranty	3 (Yr) RTB
------------------------------	------------

VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)
---------------------	---------------------------------

VIP warranty is available to registered users and is subjected to additional terms and conditions.

Warranty Operating Hours	13000 hrs
---------------------------------	-----------

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

DIMENSIONS

Cutting Interval	125 mm
-------------------------	--------

Product Height	4 mm
-----------------------	------


Product Length	5000 mm
-----------------------	---------

Maximum End to End Length	5000 mm
----------------------------------	---------

Product Width	8 mm
----------------------	------

LINE DRAWINGS

AT9251/IP67

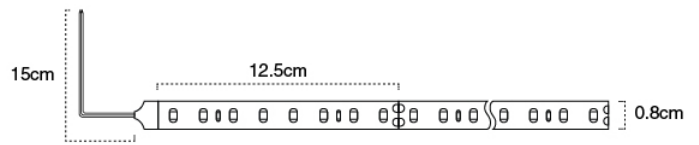

AT9251 IP67

AT9251/WW/IP67/1M

LED Strip with cable - IP67 - 4.8W/m

Features

- UV stabilized Silicon sleeve which provides excellent mechanical and IP67 protection.
- Ideal for outdoor use or in areas where mechanical protection is required without the need for additional extrusion
- A Flexible Silicon sleeve allows the strip to bend around gradual corners.
- Superior efficacy and Colour Rendering Index (CRI) >90
- Sealed ends with silicon boots
- Superior 24V design
- 60,000 hour LED life
- Supplied with 3M adhesive tape
- No additional heatsinking required, however heatsinking can be used to extend the products service life
- Large range of accessories and extrusions



ORDERING INFORMATION

Order code	16521
Description	4.8W/m IP67 1m LED Strip with cable - WW
Item Code	AT9251/WW/IP67/1M

MECHANICAL

IP Rating	IP67
------------------	------

ELECTRICAL

Electrical Rating	Class III
Input voltage	24Vdc
Watts Per Meter (W/m)	4.8
Working Temp Range	40 °C

LAMP

Macadam Steps (SDCM)	3-step MacAdam Ellipse
Beam Angle	120 °
CCT Configuration	Single
CRI	>90
Lamp/LED voltage	24 V
LED's per meter	64
Lumens /m	520 lm/m

System Efficiency

108 lm/W

LED LIFETIME

LED Lifetime >60000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

Ambient Temp (°C)	25 °C	40 °C
L80B10	52000 hrs	52000 hrs
L70B50	>60000 hrs	>60000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

TM-21 Test Hours 10000 hrs

COLOUR TEMPERATURE

CCT	3000 K
CCT Colour	Warm White
LED Wattage	4.8 W
System Lumens	520 lm

All photometric data has a tolerance of ±10%.

COMPLIANCE

Product Design Life	10 years
----------------------------	----------

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Daily Use	12 hrs
------------------	--------

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

Standards	AS/NZS 60598.1 IEC 62031
------------------	-----------------------------

WARRANTY

Commercial Use Warranty	2 RTB (Total 2 Years)
--------------------------------	-----------------------

Domestic Use Warranty	3 (Yr) RTB
------------------------------	------------

VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)
---------------------	---------------------------------

VIP warranty is available to registered users and is subjected to additional terms and conditions.

Warranty Operating Hours	13000 hrs
---------------------------------	-----------

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

DIMENSIONS

Cutting Interval	125 mm
-------------------------	--------

Product Height	4 mm
-----------------------	------


Product Length	1000 mm
-----------------------	---------

Maximum End to End Length	5000 mm
----------------------------------	---------

Product Width	8 mm
----------------------	------

LINE DRAWINGS

AT9251/IP67

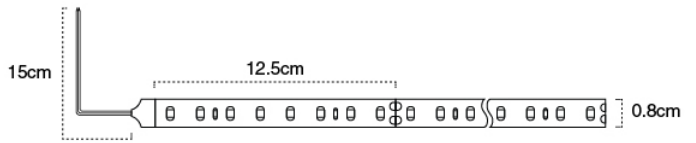

AT9251 IP67

AT9251/DL/IP67/5M

LED Strip with cable - IP67 - 4.8W/m

Features

- UV stabilized Silicon sleeve which provides excellent mechanical and IP67 protection.
- Ideal for outdoor use or in areas where mechanical protection is required without the need for additional extrusion
- A Flexible Silicon sleeve allows the strip to bend around gradual corners.
- Superior efficacy and Colour Rendering Index (CRI) >90
- Sealed ends with silicon boots
- Superior 24V design
- 60,000 hour LED life
- Supplied with 3M adhesive tape
- No additional heatsinking required, however heatsinking can be used to extend the products service life
- Large range of accessories and extrusions



ORDERING INFORMATION

Order code	16558
Description	4.8W/m IP67 5m LED Strip with cable - DL
Item Code	AT9251/DL/IP67/5M

MECHANICAL

IP Rating	IP67
------------------	------

ELECTRICAL

Electrical Rating	Class III
Input voltage	24Vdc
Watts Per Meter (W/m)	4.8
Working Temp Range	40 °C

LAMP

Macadam Steps (SDCM)	3-step MacAdam Ellipse
Beam Angle	120 °
CCT Configuration	Single
CRI	>90
Lamp/LED voltage	24 V
LED's per meter	64
Lumens /m	550 lm/m

System Efficiency

114 lm/W

LED LIFETIME

LED Lifetime >60000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

Ambient Temp (°C)	25 °C	40 °C
L80B10	52000 hrs	52000 hrs
L70B50	>60000 hrs	>60000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

TM-21 Test Hours 10000 hrs

COLOUR TEMPERATURE

CCT	5000 K
CCT Colour	Daylight
LED Wattage	24 W
System Lumens	2750 lm

All photometric data has a tolerance of ±10%.

COMPLIANCE

Product Design Life	10 years
----------------------------	----------

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Daily Use	12 hrs
------------------	--------

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

Standards	AS/NZS 60598.1 IEC 62031
------------------	-----------------------------

WARRANTY

Commercial Use Warranty	2 RTB (Total 2 Years)
--------------------------------	-----------------------

Domestic Use Warranty	3 (Yr) RTB
------------------------------	------------

VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)
---------------------	---------------------------------

VIP warranty is available to registered users and is subjected to additional terms and conditions.

Warranty Operating Hours	13000 hrs
---------------------------------	-----------

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

DIMENSIONS

Cutting Interval	125 mm
-------------------------	--------

Product Height	4 mm
-----------------------	------


Product Length	5000 mm
-----------------------	---------

Maximum End to End Length	5000 mm
----------------------------------	---------

Product Width	8 mm
----------------------	------

LINE DRAWINGS

AT9251/IP67

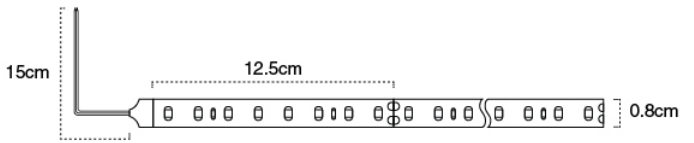

AT9251 IP67

AT9251/CW/IP67/5M

LED Strip with cable - IP67 - 4.8W/m

Features

- UV stabilized Silicon sleeve which provides excellent mechanical and IP67 protection.
- Ideal for outdoor use or in areas where mechanical protection is required without the need for additional extrusion
- A Flexible Silicon sleeve allows the strip to bend around gradual corners.
- Superior efficacy and Colour Rendering Index (CRI) >90
- Sealed ends with silicon boots
- Superior 24V design
- 60,000 hour LED life
- Supplied with 3M adhesive tape
- No additional heatsinking required, however heatsinking can be used to extend the products service life
- Large range of accessories and extrusions



ORDERING INFORMATION

Order code	16557
Description	4.8W/m IP67 5m LED Strip with cable - CW
Item Code	AT9251/CW/IP67/5M

MECHANICAL

IP Rating	IP67
------------------	------

ELECTRICAL

Electrical Rating	Class III
Input voltage	24Vdc
Watts Per Meter (W/m)	4.8
Working Temp Range	40 °C

LAMP

Macadam Steps (SDCM)	3-step MacAdam Ellipse
Beam Angle	120 °
CCT Configuration	Single
CRI	>90
Lamp/LED voltage	24 V
LED's per meter	64
Lumens /m	550 lm/m

System Efficiency

114 lm/W

LED LIFETIME

LED Lifetime >60000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

Ambient Temp (°C)	25 °C	40 °C
L80B10	52000 hrs	52000 hrs
L70B50	>60000 hrs	>60000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

TM-21 Test Hours 10000 hrs

COLOUR TEMPERATURE

CCT	4000 K
CCT Colour	Cool White
LED Wattage	24 W
System Lumens	2750 lm

All photometric data has a tolerance of ±10%.

COMPLIANCE

Product Design Life	10 years
----------------------------	----------

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Daily Use	12 hrs
------------------	--------

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

Standards	AS/NZS 60598.1 IEC 62031
------------------	-----------------------------

WARRANTY

Commercial Use Warranty	2 RTB (Total 2 Years)
--------------------------------	-----------------------

Domestic Use Warranty	3 (Yr) RTB
------------------------------	------------

VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)
---------------------	---------------------------------

VIP warranty is available to registered users and is subjected to additional terms and conditions.

Warranty Operating Hours	13000 hrs
---------------------------------	-----------

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

DIMENSIONS

Cutting Interval	125 mm
-------------------------	--------

Product Height	4 mm
-----------------------	------


Product Length	5000 mm
-----------------------	---------

Maximum End to End Length	5000 mm
----------------------------------	---------

Product Width	8 mm
----------------------	------

LINE DRAWINGS

AT9251/IP67

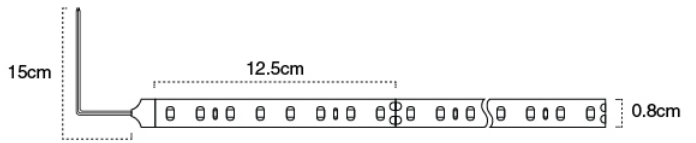

AT9251 IP67

AT9251/CW/IP67/1M

LED Strip with cable - IP67 - 4.8W/m

Features

- UV stabilized Silicon sleeve which provides excellent mechanical and IP67 protection.
- Ideal for outdoor use or in areas where mechanical protection is required without the need for additional extrusion
- A Flexible Silicon sleeve allows the strip to bend around gradual corners.
- Superior efficacy and Colour Rendering Index (CRI) >90
- Sealed ends with silicon boots
- Superior 24V design
- 60,000 hour LED life
- Supplied with 3M adhesive tape
- No additional heatsinking required, however heatsinking can be used to extend the products service life
- Large range of accessories and extrusions



ORDERING INFORMATION

Order code	16522
Description	4.8W/m IP67 1m LED Strip with cable - CW
Item Code	AT9251/CW/IP67/1M

MECHANICAL

IP Rating	IP67
------------------	------

ELECTRICAL

Electrical Rating	Class III
Input voltage	24Vdc
Watts Per Meter (W/m)	4.8
Working Temp Range	40 °C

LAMP

Macadam Steps (SDCM)	3-step MacAdam Ellipse
Beam Angle	120 °
CCT Configuration	Single
CRI	>90
Lamp/LED voltage	24 V
LED's per meter	64
Lumens /m	550 lm/m

System Efficiency

114 lm/W

LED LIFETIME

LED Lifetime >60000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

Ambient Temp (°C)	25 °C	40 °C
L80B10	52000 hrs	52000 hrs
L70B50	>60000 hrs	>60000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

TM-21 Test Hours 10000 hrs

COLOUR TEMPERATURE

CCT	4000 K
CCT Colour	Cool White
LED Wattage	4.8 W
System Lumens	550 lm

All photometric data has a tolerance of ±10%.

COMPLIANCE

Product Design Life	10 years
----------------------------	----------

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

Daily Use	12 hrs
------------------	--------

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

Standards	AS/NZS 60598.1 IEC 62031
------------------	-----------------------------

WARRANTY

Commercial Use Warranty	2 RTB (Total 2 Years)
--------------------------------	-----------------------

Domestic Use Warranty	3 (Yr) RTB
------------------------------	------------

VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)
---------------------	---------------------------------

VIP warranty is available to registered users and is subjected to additional terms and conditions.

Warranty Operating Hours	13000 hrs
---------------------------------	-----------

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

DIMENSIONS

Cutting Interval	125 mm
-------------------------	--------

Product Height	4 mm
-----------------------	------

Product Length	1000 mm
-----------------------	---------

Maximum End to End Length	5000 mm
----------------------------------	---------

Product Width	8 mm
----------------------	------

LINE DRAWINGS

AT9251/IP67

