

AT9484

AT9484/BC/TRI

10W A60 Tri-colour LED lamp. Non dimmable.
Frosted lens.

Features

- Tri-colour
- Energy efficient LED lamp
- Long life
- No mercury content
- Suitable replacement for halogen and incandescent lamps

ORDERING INFORMATION

Order code	13395
Description	A60 10W LED LAMP B22 TRI CCT NON-DIM FROST
Item Code	AT9484/BC/TRI

ELECTRICAL

Input Frequency	50 Hz
Input voltage	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

Maximum Wattage	10 W
Power Factor	0.6
System Max Wattage	10 W

LAMP

Beam Angle	180 °
Bulb Type	A60
CCT Configuration	TRI-CCT
CRI	>80
Globe Base	B22 / BC
Lamp/LED Current	82 mA
Lamp/LED voltage	109 V



COLOUR TEMPERATURE

9 Watts

Warm White (3000 K)	900 lm
Cool White (4000 K)	1000 lm
DayLight (6500 K)	950 lm

COMPLIANCE


Standards	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

DIMENSIONS


Product Height	110 mm
Product Width	60 mm

PHOTOMETRICS


AT9484/BC/TRI/CW

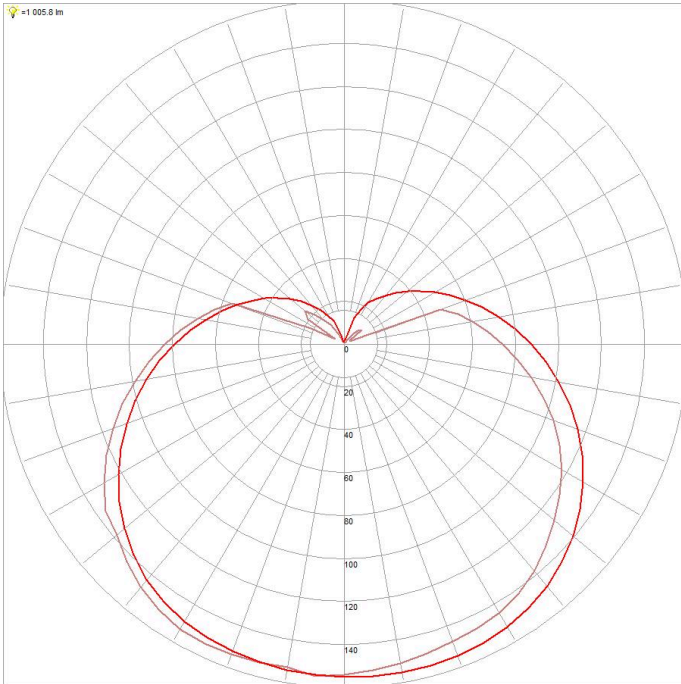

AT9484/BC/TRI/WW

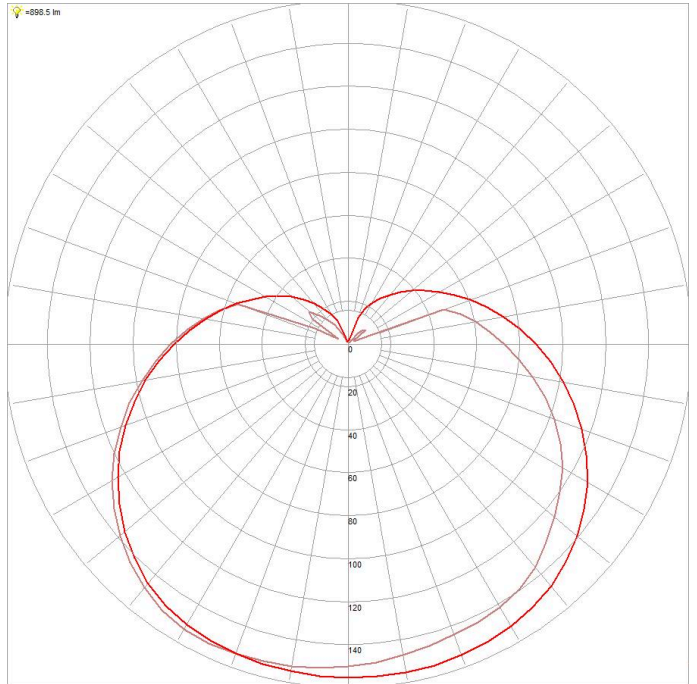

AT9484/BC/TRI/DL

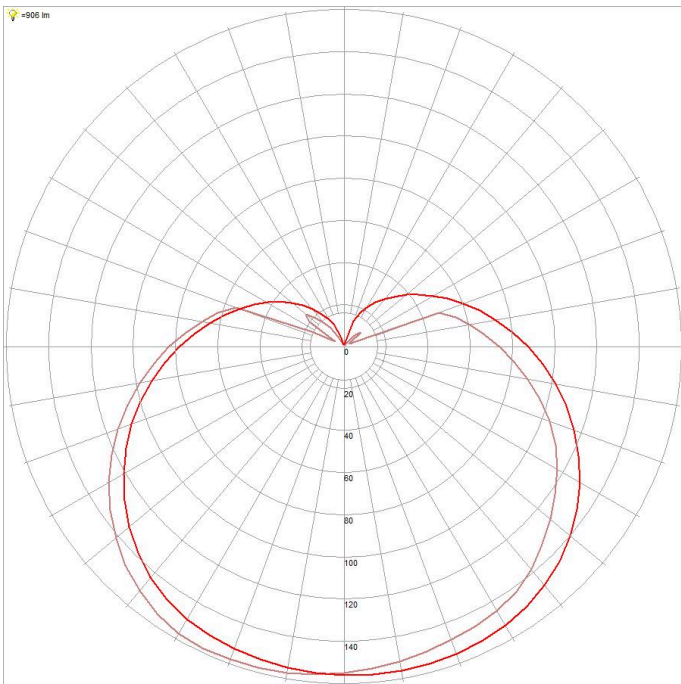

AT9484

AT9484/ES/TRI

10W A60 Tri-colour LED lamp. Non dimmable.
Frosted lens.

Features

- Tri-colour
- Energy efficient LED lamp
- Long life
- No mercury content
- Suitable replacement for halogen and incandescent lamps

ORDERING INFORMATION

Order code	13396
Description	A60 10W LED LAMP E27 TRI CCT NON-DIM FROST
Item Code	AT9484/ES/TRI

ELECTRICAL

Input Frequency	50 Hz
Input voltage	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

Maximum Wattage	10 W
Power Factor	0.6
System Max Wattage	10 W

LAMP

Beam Angle	180 °
Bulb Type	A60
CCT Configuration	TRI-CCT
CRI	>80
Globe Base	E27
Lamp/LED Current	82 mA
Lamp/LED voltage	109 V



COLOUR TEMPERATURE

9 Watts

Warm White (3000 K)	900 lm
Cool White (4000 K)	1000 lm
DayLight (6500 K)	950 lm

COMPLIANCE


Standards	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

DIMENSIONS


Product Height	110 mm
Product Width	60 mm

PHOTOMETRICS

AT9484/ES/TRI/CW

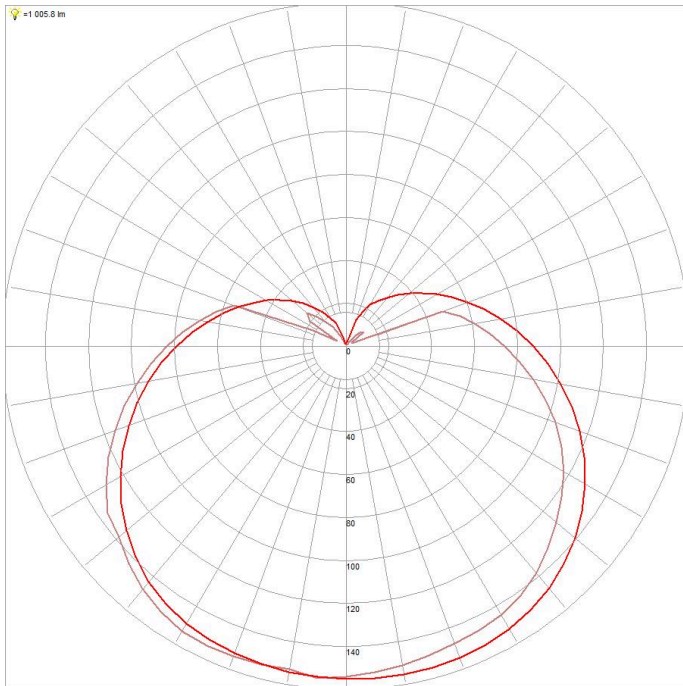

AT9484/ES/TRI/DL

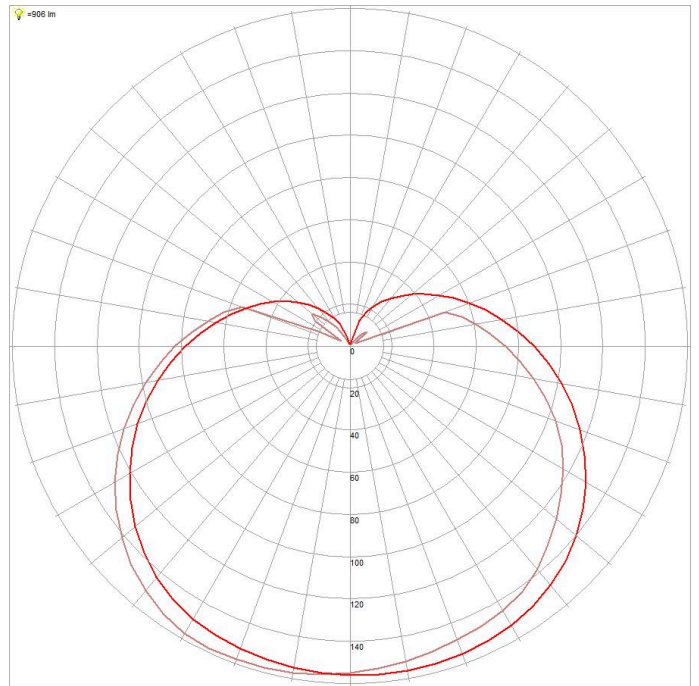

AT9484/ES/TRI/WW

