

AT9489

AT9489/ES/TRI

9W Stick Tri-colour LED lamps. Non dimmable.
Frosted lens.

Features

- Tri-colour
- Energy efficient LED lamp
- Long life
- No mercury content
- Suitable replacement for halogen and incandescent lamps



ORDERING INFORMATION

Order code	13400
Description	T38 9W LED LAMP E27 TRI CCT NON-DIM FROST
Item Code	AT9489/ES/TRI

ELECTRICAL

Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	9 W
Power Factor	0.6
System Max Wattage	9 W

LAMP

Beam Angle	220 °
Bulb Type	ST38
CCT Configuration	TRI-CCT
CRI	>80
Globe Base	E27
Lamp/LED Current	85 mA
Lamp/LED voltage	90 V

COLOUR TEMPERATURE

7 Watts

Warm White (3000 K)	700 lm
Cool White (4000 K)	800 lm
DayLight (6500 K)	750 lm

COMPLIANCE


Standards	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

DIMENSIONS


Product Height	115 mm
Product Width	37 mm

PHOTOMETRICS


AT9489/ES/TRI/DL

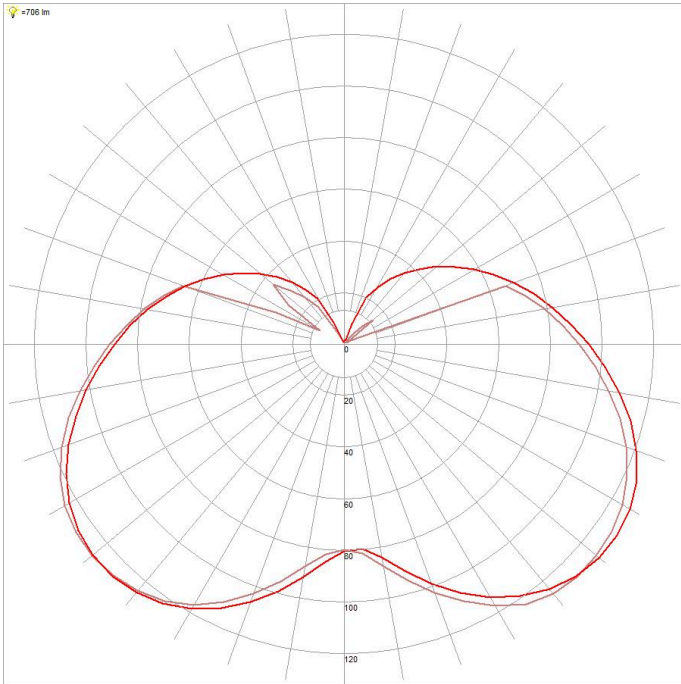

AT9489/ES/TRI/WW

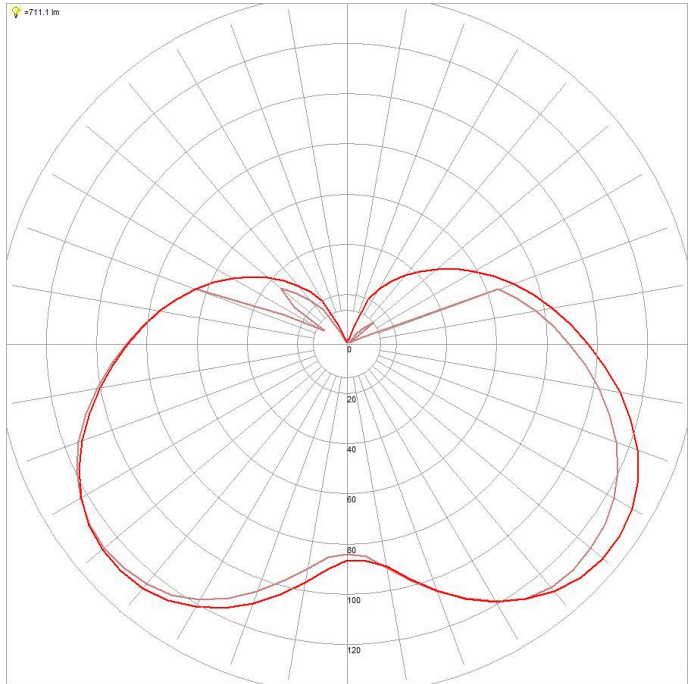

AT9489/ES/TRI/CW

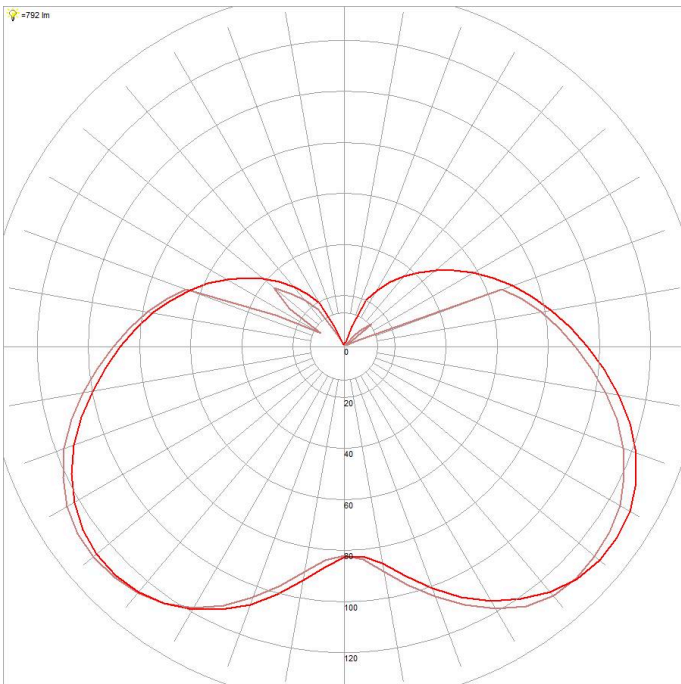

AT9489

AT9489/BC/TRI

9W Stick Tri-colour LED lamp. Non dimmable.
Frosted lens.

Features

- Tri-colour
- Energy efficient LED lamp
- Long life
- No mercury content
- Suitable replacement for halogen and incandescent lamps

ORDERING INFORMATION

Order code	13399
Description	T38 9W LED LAMP B22 TRI CCT NON-DIM FROST
Item Code	AT9489/BC/TRI

ELECTRICAL

Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	9 W
Power Factor	0.6
System Max Wattage	9 W

LAMP

Beam Angle	220 °
Bulb Type	ST38
CCT Configuration	TRI-CCT
CRI	>80
Globe Base	B22 / BC
Lamp/LED Current	85 mA
Lamp/LED voltage	90 V



COLOUR TEMPERATURE

7 Watts

Warm White (3000 K)	700 lm
Cool White (4000 K)	800 lm
DayLight (6500 K)	750 lm

COMPLIANCE


Standards	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

DIMENSIONS


Product Height	115 mm
Product Width	37 mm

PHOTOMETRICS

AT9489/BC/TRI/WW

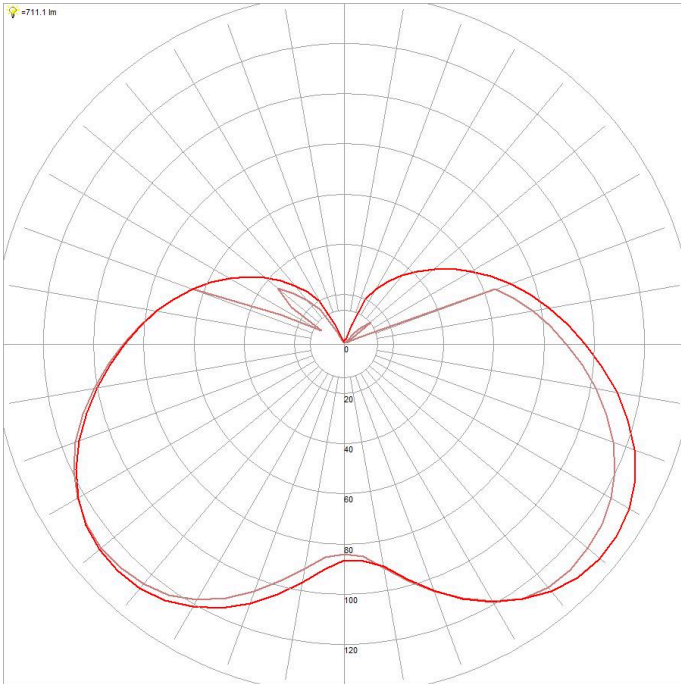

AT9489/BC/TRI/CW

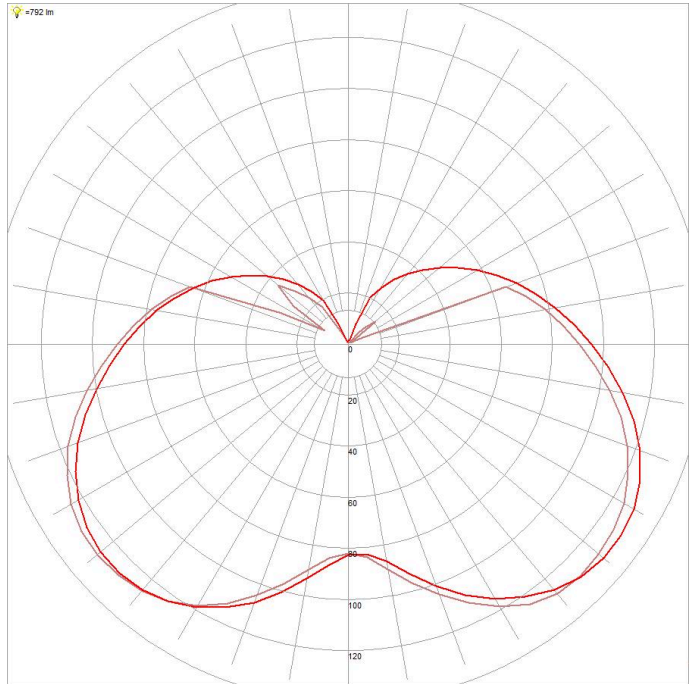

AT9489/BC/TRI/DL

