

Last modification

2022-11-13

BLADE 36-850 9329501042120



Overview

Family name	Blade
Categories	Battens
Mounting	Surface
Usage	Indoor Lighting,Trade Selection

Color / Material

Fixture Color	White
Fixture Material	Plastic
Diffuser Color	Opal
Diffuser Material	Polycarbonate

Size

Fixture Length (cm)	120.0
Fixture Width (cm)	7.5
Fixture Height (cm)	6.5
Fixture Projection (cm)	6.5

Specification

Voltage Input	240V
Wattage (max)	36
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	3200
Color Temperature	Cool White
Color Kelvin	5000k
Color Rendering	>80
Dimmable	No
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Beam Angle (degree)	180
Electrical Protection	CLASS I - HIGH VOLTAGE, EARTH REQUIRED

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.


Data Sheet

IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501042120

Image -dimensions

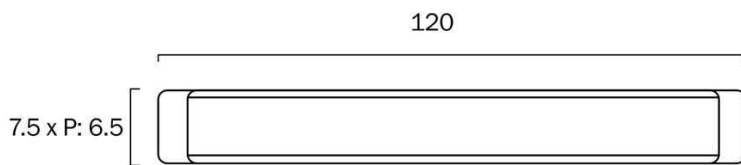

Last modification

2022-11-13

BLADE 36-830
9329501042113



Overview

Family name	Blade
Categories	Battens
Mounting	Surface
Usage	Indoor Lighting,Trade Selection

Color / Material

Fixture Color	White
Fixture Material	Plastic
Diffuser Color	Opal
Diffuser Material	Polycarbonate

Size

Fixture Length (cm)	120.0
Fixture Width (cm)	7.5
Fixture Height (cm)	6.5
Fixture Projection (cm)	6.5

Specification

Voltage Input	240V
Wattage (max)	36
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	3050
Color Temperature	Warm White
Color Kelvin	3000k
Color Rendering	>80
Dimmable	No
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Beam Angle (degree)	180
Electrical Protection	CLASS I - HIGH VOLTAGE, EARTH REQUIRED

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501042113

Image -dimensions

