

BOLT-60-TRIO LED Batten



Description

The Bolt LED Batten series is a direct replacement to traditional T8 and T5 Fluorescent battens. Incorporating a “quick fix” solution designed specifically to allow for ease of installation.

The Bolt Series LED Batten also features a dual Wattage option. So, if the area is too bright, simply press the switch located on the LED Driver to reduce the output by almost half.

Pressed body is constructed from high-quality sheet metal, white powder coated with a high transparency opal polycarbonate diffuser. Available in 600mm lengths, Now with TRIO, the added option of changing the colour temperature output of the LED batten with a dip switch on the internal driver located inside the fitting. Tricolour switchable LED Colour temperatures - Warm White 3000K/Neutral White 4000K/White 5700K. Suitable for domestic applications such as laundries, garage, storerooms. Also commercially for underground car parks.




Specification Features

Input Voltage:	240V AC
Power (W):	10/21W
IP rating (IP):	44
Lumens (lm):	(10W) Warm White 3000K - 810lm (21W) Warm White 3000K - 1665lm (10W) Neutral White 4000K - 900lm (21W) Neutral White 4000K - 1850lm (10W) White 5700K - 900lm (21W) White 5700K - 1850lm
LED type:	SMD
CCT:	3000K, 4000K, 5700K
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No
Lifespan (hrs):	40,000hrs
Installation:	Surface mounted or suspended

* IP44 rating is from the underside of the batten once installed into the ceiling.

Item No.	Variant	CCT
BOLT-60	66000	TRIO

Diagrams / Additional

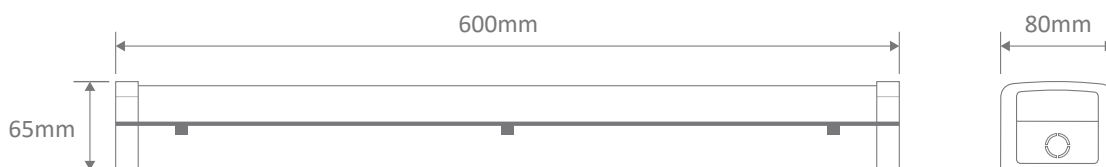

BOLT-120-TRIO LED Batten



Description

The Bolt LED Batten series is a direct replacement to traditional T8 and T5 Fluorescent battens. Incorporating a “quick fix” solution designed specifically to allow for ease of installation.

The Bolt Series LED Batten also features a dual Wattage option. So, if the area is too bright, simply press the switch located on the LED Driver to reduce the output by almost half.

Pressed body is constructed from high-quality sheet metal, white powder coated with a high transparency opal polycarbonate diffuser. Available in 1200mm lengths, Now with TRIO, the added option of changing the colour temperature output of the LED batten with a dip switch on the internal driver located inside the fitting. Tricolour switchable LED Colour temperatures - Warm White 3000K/Neutral White 4000K/White 5700K.. Suitable for domestic applications such as laundries, garage, storerooms. Also commercially for underground car parks.



Specification Features

- Input Voltage: 240V AC
 - Power (W): 21/42W
 - IP rating (IP): 44
 - Lumens (lm): (21W) Warm White 3000K - 1665lm
(42W) Warm White 3000K - 3420lm
(21W) Neutral White 4000K - 1850lm
(42W) Neutral White 4000K - 3800lm
(21W) White 5700K - 1850lm
(42W) White 5700K - 3800lm
 - LED type: SMD
 - CCT: 3000K, 4000K, 5700K
 - CRI: ≥80
 - Beam angle (°): 120°
 - Dimmable: No
 - Lifespan (hrs): 40,000hrs
 - Installation: Surface mounted or suspended
- * IP44 rating is from the underside of the batten once installed into the ceiling.*

Item No.	Variant	CCT
BOLT-120	66003	TRIO

Diagrams / Additional

