

BOXIT SLIM EXIT



CORE



FEATURES

- **24M** - 300 x 150 mm decal size
- Fully compliant (**AS/NZS 2293**)
- Replaceable easy fit, quick release decals
- Works as Single Point Units (**SPU**) out of the box
- High Quality Lithium batteries (**LiFePO₄**) and smart charger



C0:E1 C90:E1
Emergency classification




SLIM DESIGN
Wall mounted,
easy fit, quick install



SINGLE POINT UNIT
Ektor products work as
SPUs out of the box



LIFE TIME
Durable batteries and
low power consumption

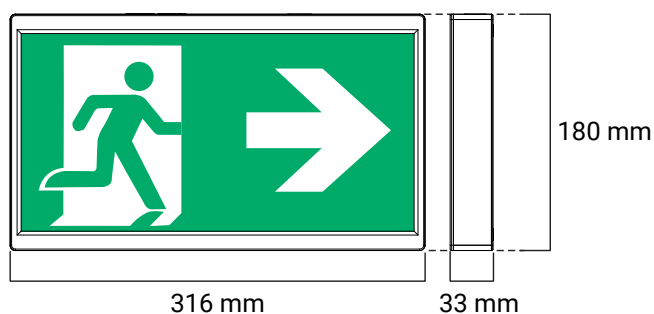

PRODUCT RANGE

ORDER CODE	PRODUCT NUMBER	SKU	QTY
------------	----------------	-----	-----

EV-BOXIT-SLIM-24M Boxit Slim Emergency Exit, 24M	9336462150535	15053	10
--	---------------	-------	----

GENERAL FEATURES

- Single sided decal
- Fully compliant (AS/NZS 2293)
- Replaceable easy fit, quick release decals
- Maintained and non-maintained operation

BUILT TO LAST

- LED light source
- Long life electronics
- Low power consumption
- 5 Years Design Life – 50,000 hours at max. ambient
- High Quality Lithium battery (LiFePO₄) and smart charger

SUITABLE INSTALLATION TYPES (OUT OF THE BOX)

- Standalone (SPU)

ACCESSORY RANGE

ORDER CODE	DESCRIPTION
------------	-------------

EV-BOXIT-DP-SLIM SKU: 02987	Boxit Slim Decal pack (1 x left, 1 x right, 1 x straight)
---------------------------------------	--

EV-1500MAH-3.2V-LIFEPO4 SKU: 13972	1500mAh 3.2V 2 Cell LiFePO ₄ Battery
--	---

EV-RODMOUNT-WHT	Rod mount, incl. Bracket for roof /body
------------------------	---

OPERATIONAL INFORMATION

GENERAL

Voltage	240 ~ 50Hz
Ambient temp.	5 to 40°C
Class	2
IP rating	IP20
Wiring	Push Terminal block
Mounting type	Surface mounted

Lamp power	1 W
------------	-----

EMERGENCY

Emergency lamp power	1 W
----------------------	-----

Rated duration	90 min
----------------	--------

Classification	CO:E1 C90:E1
----------------	--------------

BATTERY

Type	LiFePO ₄	Type	Smart charge
------	---------------------	------	--------------

Voltage	3.2 V	Time	16 Hours
---------	-------	------	----------

Codes	13972	Operation	Variable
-------	-------	-----------	----------

CONSTRUCTION

Viewing distance	24M	Decal size	300 x 150 mm
------------------	-----	------------	--------------

Body	PC	Diffuser	PMMA
------	----	----------	------

Gear tray	PC
-----------	----

COMPLIANCE

Standards	AS/NZS 60598.2.22 AS/NZS 2293.3 IEC 60598-2-22 CISPR 15
-----------	--

NOTE: For more information on the chemical resistance of our polycarbonate or our compliance documentation, please see our website.

TOTAL POWER CONSUMPTION (TPC)

MAINTAINED MODE		NON-MAINTAINED MODE	
MAX.	AVG.	MAX.	AVG.
2.5 W	2.3 W	1.5 W	0.8 W

NOTE: Average power consumption calculated with the assumption of four emergency events per year and that the battery charger is in standby at all other times (above typical usage).