


LED CANDLE GLOBES



Globe - LED

Product Features

- Input voltage: 240V AC 50/60Hz
- Frosted cover
- Ambient Temp: -15 to 40°C
- Not suitable for dimming
- Carton QTY: 1/10/100

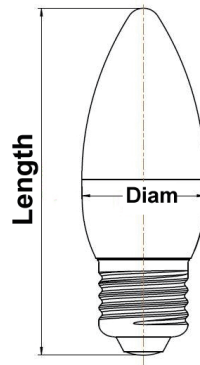

CODE	DESCRIPTION	LIFE TIME	BASE	KELVIN	LUMENS	WATT	LENGTH	DIAM
CAN17	3W LED CANDLE GLOBE SBC NW	30,000hrs	B15	5000K	260LM	3=25	102mm	36mm
CAN18	3W LED CANDLE GLOBE BC NW	30,000hrs	B22	5000K	260LM	3=25	100mm	36mm
CAN19A	4W LED CANDLE GLOBE SES NW	20,000hrs	E14	5000K	320LM	3=25	108mm	38mm
CAN20	3W LED CANDLE GLOBE ES NW	30,000hrs	E27	5000K	260LM	3=25	100mm	36mm
CAN23A	4W LED CANDLE GLOBE SES WW	20,000hrs	E14	3000K	320LM	3=25	108mm	38mm
CAN24	3W LED CANDLE GLOBE ES WW	30,000hrs	E27	3000K	250LM	3=25	100mm	36mm



CODE	DESCRIPTION	LIFE TIME	BASE	KELVIN	LUMENS	WATT	LENGTH	DIAM
CAN25	6W LED CANDLE GLOBE ES WW	25,000hrs	E27	3000K	470LM	6=40	102mm	38mm
CAN26	6W LED CANDLE GLOBE BC WW	25,000hrs	B22	3000K	470LM	6=40	101mm	38mm
CAN28A	6W LED CANDLE GLOBE SBC WW	25,000hrs	B15	3000K	470LM	6=40	97.5mm	36mm
CAN29	6W LED CANDLE GLOBE ES NW	25,000hrs	E27	5000K	490LM	6=40	102mm	38mm
CAN30	6W LED CANDLE GLOBE BC NW	25,000hrs	B22	5000K	490LM	6=40	101mm	38mm
CAN32	6W LED CANDLE GLOBE SBC NW	25,000hrs	B15	5000K	490LM	6=40	107mm	38mm

