


CLYDE LINK | TRACK LIGHT | BLACK

2213550103

nordlux®

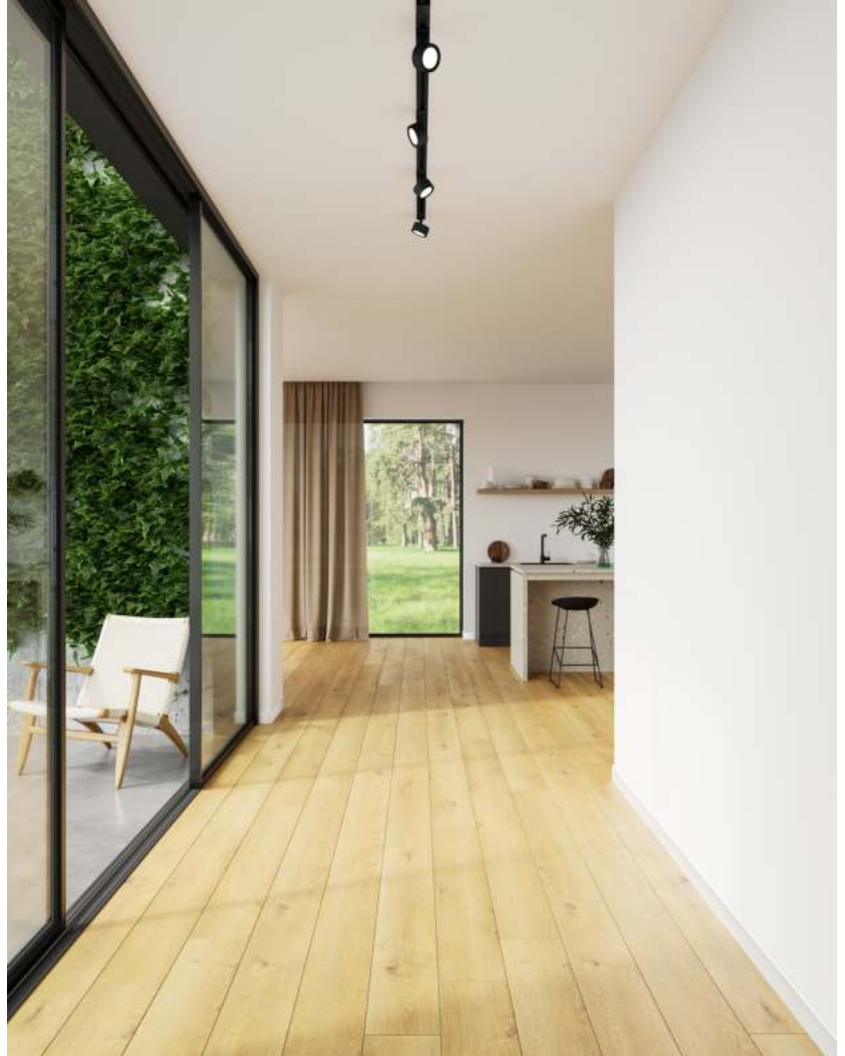

Voltage (V): 220-240 Volt
IP degree: IP20
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Bulb base: LED Module
Parallel connection: False

Primary material: Metal
Secondary material: Plastic
Is the cable replaceable: False
Color: Black

Height (cm): 10.5
Width (cm): 8.5
Length (cm): 8.5
Tilt Angle (°): 90
Turning Angle (°): 320


EAN: 5704924012280
TUN: 2276911
Item Number: 2213550103

Pcs Per Master Carton: 6
Sales Box Height (cm): 11.5
Sales Box Width (cm): 9.5
Sales Box Depth (cm): 9.5
Sales Box Volume m³ : 0.001
Product net weight (kg): 0.3

Color Temperature (K): 2700K
Lifetime (h): 25000
Energy Class: F

• Fits the Nordlux Link system • 3-step Moodmaker™ dimming on your regular wall switch


Slim Nordic design and innovative technology is combined in the most compelling way in the Clyde series. Clyde has built-in Moodmaker™ functionality, which allows you to adjust the light in three steps from your regular wall switch. Fits the Nordlux Link system where it is easily installed and moved.

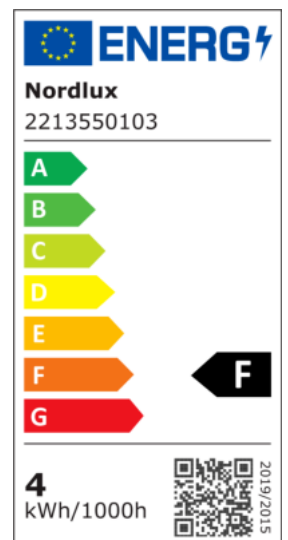

CLYDE LINK | TRACK LIGHT | MATT WHITE

2213550101

nordlux®

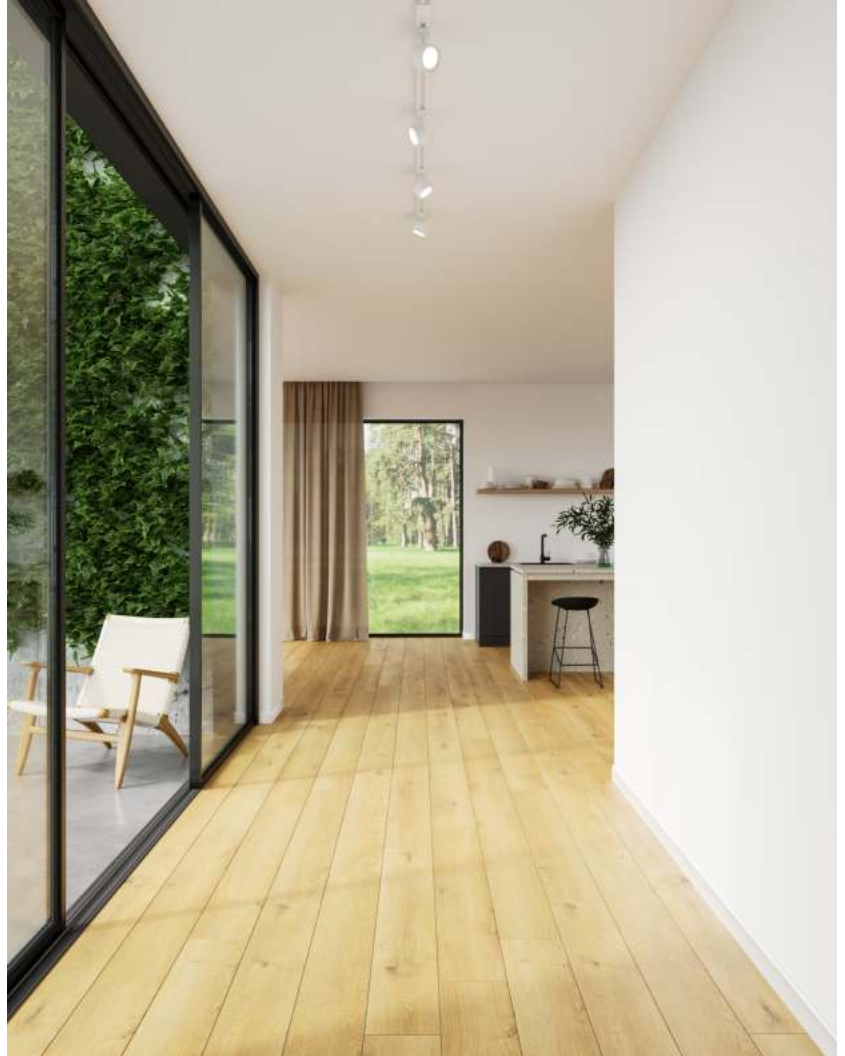

Voltage (V): 220-240 Volt
IP degree: IP20
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Bulb base: LED Module
Parallel connection: False

Primary material: Metal
Secondary material: Plastic
Is the cable replaceable: False
Color: Matt white

Height (cm): 10.5
Width (cm): 8.5
Length (cm): 8.5
Tilt Angle (°): 90
Turning Angle (°): 320

EAN: 5704924012273
TUN: 2276957
Item Number: 2213550101

Pcs Per Master Carton: 6
Sales Box Height (cm): 11.5
Sales Box Width (cm): 9.5
Sales Box Depth (cm): 9.5
Sales Box Volume m³ : 0.001
Product net weight (kg): 0.3

Color Temperature (K): 2700K
Lifetime (h): 25000
Energy Class: F

• Fits the Nordlux Link system • 3-step Moodmaker™ dimming on your regular wall switch

Slim Nordic design and innovative technology is combined in the most compelling way in the Clyde series. Clyde has built-in Moodmaker™ functionality, which allows you to adjust the light in three steps from your regular wall switch. Fits the Nordlux Link system where it is easily installed and moved.

ENERG
Nordlux
2213550101

A
B
C
D
E
F
G

4 kWh/1000h

2019/2015