







FANTECHTRADE ///

MADE FOR TRADE

Ceiling Fans

AeroGide

SYSTEM

Maximises air flow and fan efficiency

Ensures smooth, low noise operation

Produces balanced, aerodynamic rotational movement

AeroGlide System is the next generation of innovative ceiling fan technology. It combines aerodynamic engineering techniques with state-of-the art motor design to maximise fan efficiency and achieve a balanced, ultra smooth rotational movement.

Impeller blade geometry has been fully optimised to enhance air flow volume and direct the air stream where it is needed.

Each model includes blades with a cutting edge twist profile design that improves air movement and overall fan performance. AeroGlide also incorporates ergonomic quick connect terminals that simplify wiring and allow fast, time saving installation.


The AeroGlide System is integrated into the Fantech Trade premium ceiling fan range, including the Flair, Quinton and Juliet models.

Our years of fan engineering knowledge and expertise in air movement ensures AeroGlide's inherent attributes deliver strong efficient air flows and quiet operation.



COMPLETE RANGE OVERVIEW

FLAIR

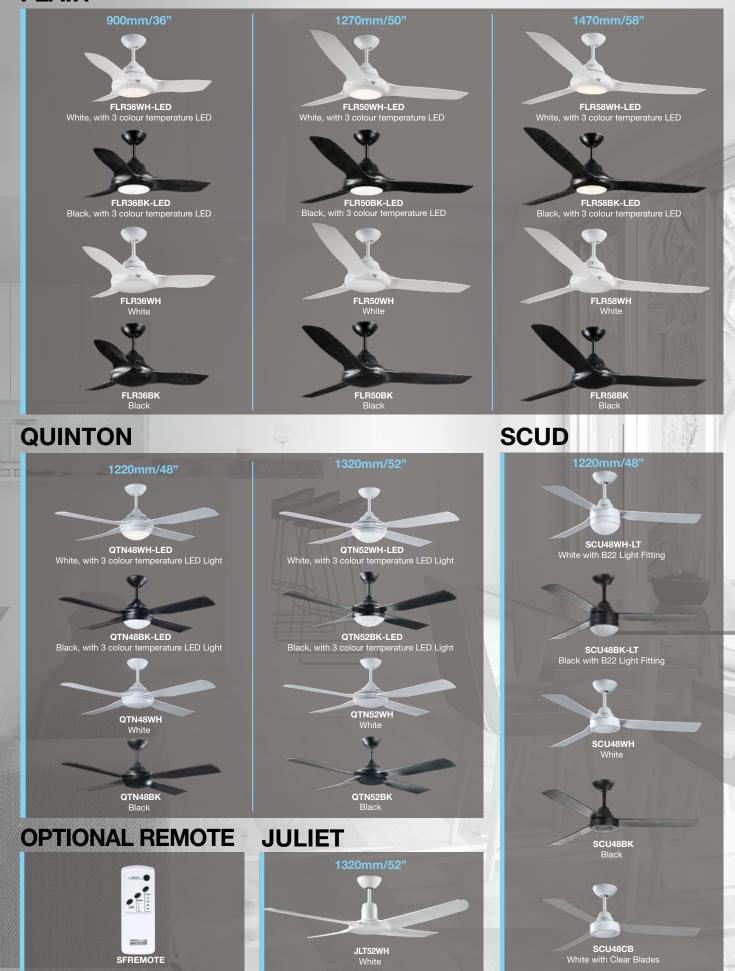









FLAIR 3 BLADE CEILING FAN






The Flair 3 blade ceiling fans feature a contemporary design to suit most modern apartments and homes. They include an innovative blade design that maximises air flow and provides excellent air circulation and cooling effect. The Flair range is engineered for fast and efficient installation, and fitted with a reliable high quality AC motor.


- Available in black or white, and with/without LED light.
- Pre-balanced for smoother, low noise operation.
- Made from durable ABS for a long working life.
- 18 watt LED light can be set to cool, neutral or warm white (LED light models only).
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).


MARTINE CONTRACTOR

· · · · O I



Optional Remote Control (SFREMOTE)

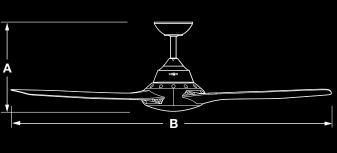

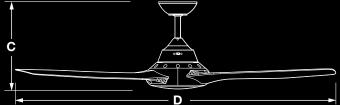

MODEL		FLR50WH FLR50BK		FLR36WH-LED FLR36BK-LED		
Α	360mm/14.2"	360mm/14.2"	360mm/14.2"			
В	900mm/35.4"	1270mm/50"	1470mm/57.9"			
С	-	-	-	355mm/14"	355mm/14"	355mm/14"
D	-	-	-	900mm/35.4"	1270mm/50"	1470mm/57.9"

OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black

*Condtions apply.



11

Flair 50" in black with 3 colour temperature LED light (FLR50BK-LED)

Flair 50" in black (FLR50BK)


MODEL	FAN SIZE	COLOUR	LED LIGHT
FLR36WH	900mm/35.4"	White	No
FLR36BK	900mm/35.4"	Black	No
FLR50WH	1270mm/50"	White	No
FLR50BK	1270mm/50"	Black	No
FLR58WH	1470mm/57.9"	White	No
FLR58BK	1470mm/57.9"	Black	No
FLR36WH-LED	900mm/35.4"	White	Yes
FLR36BK-LED	900mm/35.4"	Black	Yes
FLR50WH-LED	1270mm/50"	White	Yes
FLR50BK-LED	1270mm/50"	Black	Yes
FLR58WH-LED	1470mm/57.9"	White	Yes
FLR58BK-LED	1470mm/57.9"	Black	Yes
	FLR36WH FLR36BK	FLR50WH FLR50BK	FLR58WH


MODEL	FLR36BK FLR36WH-LED FLR36BK-LED	FLR50BK FLR50WH-LED FLR50BK-LED	FLR58BK FLR58WH-LED FLR58BK-LED
Max. Air Flow m³/h	12,630	11,700	12,480
Watts	75	75	85
Volts	220-240	220-240	220-240
Hertz	50	50	50

LED LIGHT SPECIFICATIONS

Lumens	
Light Colour Temperature	







1330

4000K

1230


5700K

1120

3000K


(Colour Temperature: 3000K) (Colour Temperature: 4000K) (Colour Temperature: 5700K) Colour indicated in drawings above is for illustrative purposes only.

REVERSIBLE ROTATION

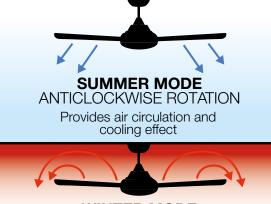

WINTER MODE **CLOCKWISE ROTATION**

Brings warm air down from the ceiling and into the occupied space



Mountable on ceilings with a maximum angle of 18°.





Quinton 48" in white (QTN48WH)

QUINTON **4 BLADE CEILING FAN**





The Quinton 4 blade ceiling fans, with and without LED light, provide exceptional air circulation and cooling effect within indoor and covered outdoor areas. They are made from durable ABS for a long working life and pre-balanced for smoother, low noise operation.

- Innovative blade geometry maximises air flow & fan efficiency.
- 18 watt LED light can be set to cool, neutral or warm white (LED light models only).
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Available in black or white.
- Engineered for fast and efficient installation.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).

3 speed wall controller with light switch included.





Optional Remote Control (SFREMOTE)



*Condtions apply.



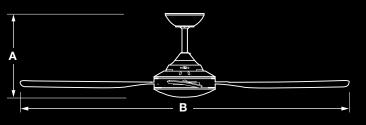

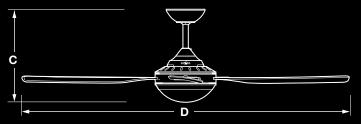

MODEL	QTN48WH QTN48BK	QTN52WH QTN52BK	QTN48WH-LED QTN48BK-LED	QTN52WH-LED QTN52BK-LED
Α	340mm/13.4"	340mm/13.4"	-	-
В	1220mm/48"	1320mm/52"		
С	_	-	370mm/14.6"	370mm/14.6"
D	-	-	1220mm/48"	1320mm/52"

OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black

Quinton 48" in black with 3 colour temperature LED light (QTN48BK-LED)

Quinton 48" in white with 3 colour temperature LED light (QTN48WH-LED)


1.000

Quinton 48" in black (QTN48BK)

MODEL	FAN SIZE	COLOUR	LED LIGHT
QTN48WH	1220mm/48"	White	No
QTN48BK	1220mm/48"	Black	No
QTN52WH	1320mm/52"	White	No
QTN52BK	1320mm/52"	Black	No
QTN48WH-LED	1220mm/48"	White	Yes
QTN48BK-LED	1220mm/48"	Black	Yes
QTN52WH-LED	1320mm/52"	White	Yes
QTN52BK-LED	1320mm/52"	Black	Yes

MODEL	QTN48WH QTN48BK QTN48WH-LED QTN48BK-LED	QTN52WH QTN52BK QTN52WH-LED QTN52WH-LED
Max. Air Flow m³/h	10,560	13,120
Watts	75	75
Volts	220-240	220-240
Hertz	50	50

REVERSIBLE ROTATION

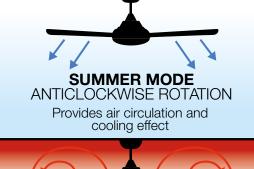

WINTER MODE

CLOCKWISE ROTATION

Brings warm air down from the ceiling and into the occupied space


18°


Mountable on ceilings with


a maximum angle of 18°.

LED LIGHT SPECIFICATIONS

Lumens 1225 1450 1350 Light Colour Temperature 3000K 4000K 5700K







(Colour Temperature: 5700K)

Colour indicated in drawings above is for illustrative purposes only.





8

П



SCUD 3 BLADE CEILING FAN



The Scud 3 blade ceiling fans provide exceptional air circulation and cooling effect within indoor and covered outdoor areas. They are made from durable ABS⁺ for a long working life and pre-balanced for smoother, low noise operation.

- Available in black, white or white with clear blades.
- Comes with and without B22 light fitting (Light globe not included).
- Innovative blade geometry maximises air flow & fan efficiency.
- High quality and reliable AC motor and components.
- Engineered for fast and efficient installation.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).




3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)

*Conditions apply. [†]Model SCU48CB includes clear blades made from polycarbonate.

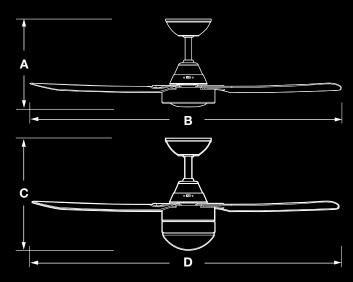

MODEL	SCU48WH SCU48BK SCU48CB	SCU48WH-LT SCU48BK-LT
Α	310mm/12.2"	
В	1220mm/48"	-
С	-	400mm/16"
D	-	1220mm/48"

OPTIONAL DOWNRODS


MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD900BK	900mm	Black
ROD1500WH	1500mm	White
ROD1500BK	1500mm	Black



MODEL	FAN SIZE	COLOUR	LIGHT FITTING
SCU48WH	1220mm/48"	White	No
SCU48BK	1220mm/48"	Black	No
SCU48CB	1220mm/48"	White with Clear Blades	No
SCU48WH-LT	1220mm/48"	White	Yes
SCU48BK-LT	1220mm/48"	Black	Yes


MODEL	SCU48WH SCU48BK SCU48CB	SCU48WH-LT SCU48BK-LT
Max. Air Flow m ³ /h	11,400	11,400
Watts	45	45
Volts	220-240	220-240
Hertz	50	50
Max Light Power (W)	-	15

REVERSIBLE ROTATION

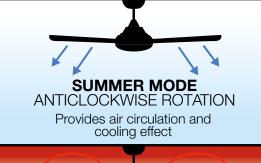

WINTER MODE CLOCKWISE ROTATION

Brings warm air down from the ceiling and into the occupied space



Mountable on ceilings with 18 a maximum angle of 18°.

Scud 48" in white with clear blades (SCU48CB)



j)



Juliet 52" in white (JLT52WH)




JULIET 4 BLADE CEILING FAN



The Juliet 4 blade ceiling fan is certified with an IP55 dust and water protection rating which makes it ideal for pergolas and outdoor entertainment areas. It is pre-balanced for smoother, low noise operation and provides excellent cooling effect together with outstanding air circulation. The Juliet features a durable diecast aluminium motor housing and UV resistant ABS blades for a long working life.


- Innovative blade geometry maximises air flow & fan efficiency.
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Engineered for fast and efficient installation.
- IP55 dust and water protection rating makes it ideal for outdoor areas.
- Quick connect terminals simplify wiring.
- UV resistant ABS blades for a long working life.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).

REVERSIBLE ROTATION





*Conditions apply.

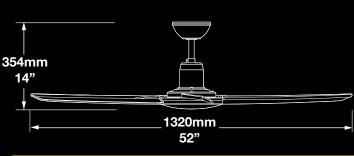

MODEL	JLT52WH
Max. Air Flow m³/h	13,720
Watts	100
Volts	220-240
Hertz	50

OPTIONAL DOWNRODS

MODEL	LENGTH	COLOUR
ROD900WH	900mm	White
ROD1500WH	1500mm	White



3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)

DISCOVER MORE OF THE **FANTECH TRADE** PRODUCT RANGE



Wall Mounted Exhaust Fans



Window Mounted Exhaust Fans

Ceiling Mounted Exhaust Fans



In-line Duct Mounted Fans



Heat Transfer Kits

Energy Recovery Units



External Wall Mounted Exhaust Fans



Roof Mounted Fans 6

Duct and Duct Fitttings



Internal and External Grilles



Fantech Trade Catalogue out NOW!





www.fantechtrade.com.au www.fantechtrade.co.nz

Australia: 1300 387 587 New Zealand: 0800 106 266





Check out our ceiling fans in action

For sales enquiries contact:

TT0075 09/21

Specifications and design subject to change without notice.

A MEMBER OF CO ELT,

