




- High performance, economy flush metal downlight.

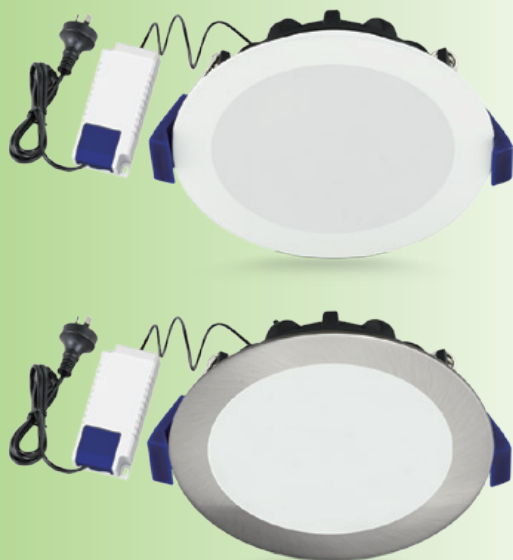

FEATURES

- Aluminium heat sink
- High efficiency SMD chips
- Constant current driver
- Highly transparent opal polycarbonate diffuser
- IC-F and IC-4 Rating. Can be installed under ceiling insulation

DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

INCLUDES

- Fixed head LED downlight
- Dimmable LED driver
- 1.2 m flex and plug

APPLICATIONS

- Residential
- Hotels and shops
- Conference rooms
- Reception areas
- Bathrooms and wet areas

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION		IP RATING	DIMMABLE	Ra	DISTRIBUTION	DIMENSIONS(mm)
			 leading and trailing edge	 Ra≥80		

Part No.	Voltage	Watt.	PF	Color Temp.	Lumens	Beam Angle	Lifetime L70B50	Fitting Colour	Net Weight (kg)
172021C	220-240V	11W	0.9	3000K	850lm	110°	35000h	White	0.28
172022C	220-240V	11W	0.9	4000K	900lm	110°	35000h	White	0.28
172073C	220-240V	11W	0.9	5000K	900lm	110°	35000h	White	0.28
172023C	220-240V	11W	0.9	3000K	850lm	110°	35000h	Satin Chrome	0.28
172024C	220-240V	11W	0.9	4000K	900lm	110°	35000h	Satin Chrome	0.28
172075C	220-240V	11W	0.9	5000K	900lm	110°	35000h	Satin Chrome	0.28

Part No.	Model No.	Driver Model No.	VEET Status	IPART Status
172021C	YKRS3G1A-D A1-WT	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172022C	YKRS3G1A-D A1-WT	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172073C	YKRS3G1A-D A1-WT	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172023C	YKRS3G1A-D A1-BN	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172024C	YKRS3G1A-D A1-BN	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172075C	YKRS3G1A-D A1-BN	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ

[1] Operating Frequency=50/60Hz; [2] This fitting is IP54 only once installed;

[3] Operating Temperature:-20 C~+40 C

