


- High performance, economy recessed metal downlight.

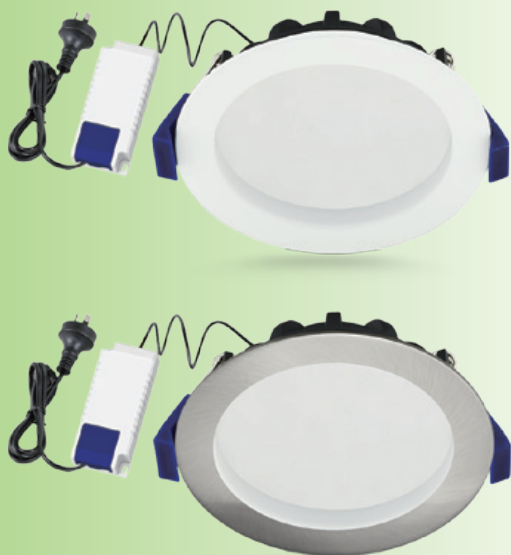

FEATURES

- Aluminium heat sink
- High efficiency SMD chips
- Constant current driver
- Highly transparent opal polycarbonate diffuser
- IC-F and IC-4 rating. Can be installed under ceiling insulation

DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

INCLUDES

- Fixed head LED downlight
- Dimmable LED driver
- 1.2 m flex and plug

APPLICATIONS

- Residential
- Hotels and shops
- Conference rooms
- Reception areas
- Bathrooms and wet areas

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	Ra	DISTRIBUTION	DIMENSIONS(mm)
		leading and trailing edge	Ra≥80		

Part No.	Voltage	Watt.	PF	Color Temp.	Lumens	Beam Angle	Lifetime L70B50	Fitting Colour	Net Weight (kg)
172001C	220-240V	11W	0.9	3000K	850lm	110°	35000h	White	0.28
172002C	220-240V	11W	0.9	4000K	900lm	110°	35000h	White	0.28
172074C	220-240V	11W	0.9	5000K	900lm	110°	35000h	White	0.28
172013C	220-240V	11W	0.9	3000K	850lm	110°	35000h	Satin Chrome	0.28
172014C	220-240V	11W	0.9	4000K	900lm	110°	35000h	Satin Chrome	0.28
172076C	220-240V	11W	0.9	5000K	900lm	110°	35000h	Satin Chrome	0.28

Part No.	Model No.	Driver Model No.	VEET Status	IPART Status
172001C	YKRS3G1B-D A1-WT	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172002C	YKRS3G1B-D A1-WT	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172074C	YKRS3G1B-D A1-WT	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172013C	YKRS3G1B-D A1-BN	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172014C	YKRS3G1B-D A1-BN	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ
172076C	YKRS3G1B-D A1-BN	YKD12CC270D	Approved No.: 4923	Approved No.: 24143S15-KGA3EBQ

[1] Operating Frequency=50/60Hz; [2] This fitting is IP54 only once installed;
[3] Operating Temperature:-20 C~+40 C

