


## Como-WLR

### 8W Rippled Glass Wall Mounted Luminaire

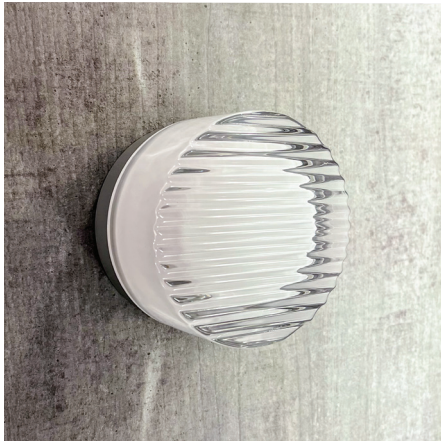

Glass Finishes

Clear | Opal (OP)       Smoke Grey (SG)


Custom

Base Finishes

White (WH)       Black (BK)

Natural Anodised (NA)       Brushed Brass (BB)

Brushed Copper (BC)       Custom

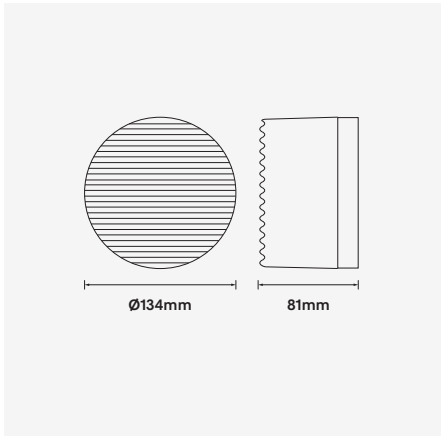

WATTAGE 8W
3-Step
CRI (Ra) >90
Bluetooth
CE
WARRANTY 5YR

IP 65
Flicker Free
MAINS DIM
Wall mount

Classic by design with a modern spin, the Como wall luminaire offers a warm and inviting glow on both vertical and horizontal surfaces. The heavy blown glass offers a smooth, even diffused illumination with no visible light source.

Designed to complement a vast range of interior designs, the Como wall light is available in multiple glass and mounting base finishes to suit almost any design intent.

Incorporating mains-dimming as standard with optional DALI-2 and Bluetooth dimming on request. The Como offers a 5 year warranty.

- Luminaire wattage: 8W (System)
- Luminous flux: 460Lm<sup>2</sup>
- Luminaire efficacy: 57.5Lm/W<sup>1</sup>
- Correlated colour temperature: 2700K, 3000K, 4000K
- Colour rendering index: >90<sup>3</sup>
- Mac-Adams Ellipse: 3-SDCM
- LED type: Epistar SMD LED
- Symmetrical distribution: 360°
- Outer trim Ø134mm x Depth 81mm
- Ingress protection rating: IP65
- Glass finishes: Clear/Opal, Smoke Grey, custom<sup>4</sup>
- Base finishes: Matte White, Matte Black, Natural Anodised, Brs. Brass, Brs. Copper, custom<sup>4</sup>
- Longevity: >50,000Hrs L80 B20
- Input voltage: 220-240VAC, 50-60Hz
- Driver: Mains-dimmable as standard
- Dimming: DALI-2, BLE (basicDIM Wireless / Casambi) on request<sup>4</sup>
- Weight: 1.65Kg
- Warranty: 5 years<sup>5</sup>

| Model           | Luminous Flux <sup>2</sup> | System Wattage | CCT   | CRI <sup>3</sup> | Distribution |
|-----------------|----------------------------|----------------|-------|------------------|--------------|
| COMO-WLR-8W-27K | 400Lm                      | 8W             | 2700K | >90              | 360°         |
| COMO-WLR-8W-3K  | 460Lm                      | 8W             | 3000K | >90              | 360°         |
| COMO-WLR-8W-4K  | 495Lm                      | 8W             | 4000K | >90              | 360°         |

For Mains-dimming add suffix MD  
For DALI-2 dimming add suffix D  
For BLUETOOTH dimming add suffix BT

Example product order code configuration: COMO-WLR-8W-3K-360-MD-(OP/BB)

| Model    | Wattage | CCT | Distribution | Driver | Glass Finish / Base Finish |
|----------|---------|-----|--------------|--------|----------------------------|
| COMO-WLR | 8W      | 3K  | 360          | MD     | OP/BB                      |

1 Luminaire efficacy based on 3000K; CCT variation will alter efficacy

2 +/- 10% stated initial LED luminous flux tolerance

3 Colour Rendering Index: >90 Standard

4 Additional charges apply for non-standard colour/s and dimming options. DALI-2 and Bluetooth dimming require remote LED driver

5 Five year manufacturer's warranty covering product defects and performance deficiencies