

DECO-28-TRIO Fixed LED Downlight



Description

The DECO-20 and Deco-28 range of commercial LED downlights have been designed with a deep-set frame to reduce glare from the light source. Featuring a wide light distribution, and with an ultra slim housing, allows for this downlight to be suitable for installations where ceiling space is minimal. Complete with a dimmable LED driver and flex and plug. Fully dimmable with Domus dimmer series.


Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




Specification Features

- Input Voltage: 240V AC
- Power (W): 28W
- IP rating (IP): 44*
- Lumens (lm): Warm White 3000K - 2300lm
Neutral White 4000K - 2350lm
White 5700K - 2400lm
- LED type: SMD
- CCT: 3000K - 4000K - 5700K (Switchable)
- CRI: ≥80
- Beam angle (°): 90°
- Dimmable: Yes**
- Lifespan (hrs): 50,000hrs
- Cutout (∅): ∅200-210mm

* IP44 rating is from the underside of the down light once installed into the ceiling.
** Tested on the Domus dimmer series. May work on others but not tested.



Diagrams / Additional

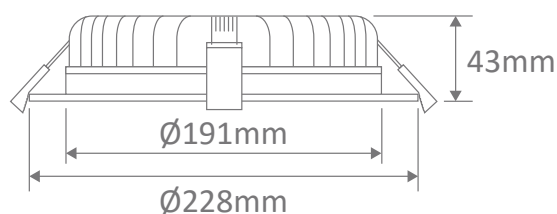

Cutout: ∅200 - ∅210mm

| Item No. | Variant | Colour Temp |
|-------------|---------|-------------|
| DECO-28-WHT | 20434 | TRIO |
| DECO-28-BLK | 20435 | |