

Defender

Outdoor Range



Specifications

Solar LED Floodlight
 Poly-Crystalline Silicone Solar Panel
 90 Degree Beam Angle
 5 – 6 hours Full Brightness on Full Charge
 PIR Sensor with two working modes



Dimensions

Length: 22cm
 Height: 15cm
 Width: 3cm



Wattage	5W LED
Colour Temp	4000K
Lumens	500Lm
Dimmable	NO

2 Working Modes

Mode 1: Sensor Mode
Battery capacity ≥ 30%

Light turns on to full brightness when motion is detected. After 20 seconds of no motion light dims to low brightness.

Battery capacity ≤ 30%

Light turns on to full brightness when motion is detected. After 20 seconds of no motion light turns off.

Mode 2: Constant Lighting

Press power button for 3 seconds - light will turn on to full brightness until battery capacity reduces to zero.

Model No.	Description	Colour	Globe
MXS4405	LED Solar Floodlight	Black	5W / 500Lm

Defender

Solar LED Floodlight Range



Specifications

10W LED Solar Floodlight.
 Matt Black Aluminium finish.
 Available with wall and pole mounting bracket.
 Dual Built-in PIR sensors.
 Operating temperature of -20~50°C.
 Uniform Light output with 90° beam angle.







Dimensions

L27.5cm x H19.5cm
 Ext: 3.5cm
 Carton Weight : 1.65 kg
 Carton : H30.5 x W67 x D22.5


Wattage	10W LED
Colour Temp	4000K
Lumens	1080Lm
Dimmable	NO



Working Modes:

 On/Off	 Automatically turns on at dusk and remains at 20% brightness
 Light turns on to full brightness when motion is detected. After 20 seconds of no motion light dims to low brightness	 Light turns on to full brightness when motion is detected. After 30 seconds of no motion light turns off

10W Floodlight: Bracket included for mounting on D4-6cm Pole.

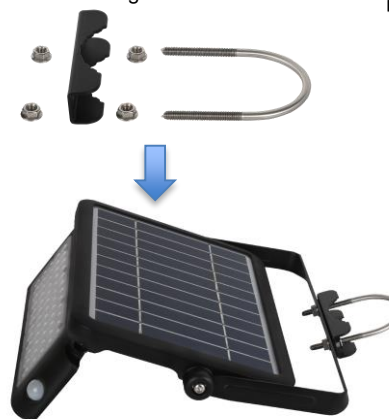

Model No.	Description	Colour	Globe
MXS4410	10W LED Solar Floodlight	Black	10W / 1080Lm