

Last modification

2022-11-24

EDGE 060.20.3C
9329501059463



Overview

Family name	Edge
Categories	Battens
Mounting	Surface
Usage	Indoor Lighting,Trade Selection

Color / Material

Fixture Color	White
Fixture Material	Plastic,Metal
Canopy Color	White
Diffuser Color	Opaline
Diffuser Material	Polycarbonate

Size

Fixture Length (cm)	60.0
Fixture Width (cm)	8.3

Specification

Voltage Input	240V
Wattage (max)	20
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	2200
Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4500k - 6500k)
Color Rendering	>82
Dimmable	No
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Beam Angle (degree)	120
Control Gear Included	Yes-integrated
Current Output	250



All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Electrical Protection	CLASS I - HIGH VOLTAGE, EARTH REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501059463

Image -dimensions

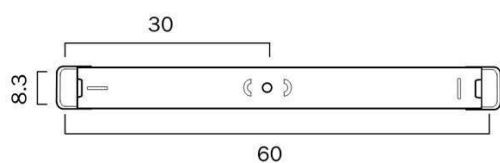



Last modification

2022-11-24

EDGE 120.40.3C

9329501059470



Overview

Family name	Edge
Categories	Battens
Mounting	Surface
Usage	Indoor Lighting,Trade Selection

Color / Material

Fixture Color	White
Fixture Material	Plastic,Metal
Canopy Color	White
Diffuser Color	Opaline
Diffuser Material	Polycarbonate

Size

Fixture Length (cm)	120.0
Fixture Width (cm)	8.3

Specification

Voltage Input	240V
Wattage (max)	40
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	4000
Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4500k - 6500k)
Color Rendering	>82
Dimmable	No
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Beam Angle (degree)	120
Control Gear Included	Yes-integrated
Current Output	500

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Electrical Protection	CLASS I - HIGH VOLTAGE, EARTH REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501059470

Image -dimensions

