


SUMMARY

The Celeste is an adjustable downlight ideal for commercial applications. Featuring a gimbal, the beam on this versatile fitting can be tilted up to 40 degrees to suit individual preferences or application requirements. Built to last, it incorporates high efficiency SMD LED chips housed in a metal body with an opal polycarbonate diffuser for optimal lighting comfort. The remote dimmable driver and pre-wired flex and plug ensures quick and easy installation.

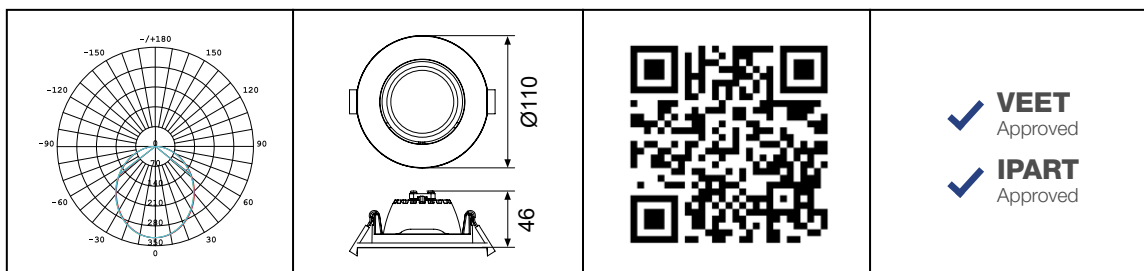


PRODUCT DATA

Order Code	172008A
Voltage	220-240V
Wattage	11W
Lumen Output	850Lm
CCT	4000K
IP Rating	IP20
IC Rating	CA90
Beam Angle	100°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Gimbal - up to 40° tilt
Cutout Size	Ø90mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.37
Lifetime L70B50	35,000 hours
Warranty	5 years



SUMMARY

The Celeste is an adjustable downlight ideal for commercial applications. Featuring a gimbal, the beam on this versatile fitting can be tilted up to 40 degrees to suit individual preferences or application requirements. Built to last, it incorporates high efficiency SMD LED chips housed in a metal body with an opal polycarbonate diffuser for optimal lighting comfort. The remote dimmable driver and pre-wired flex and plug ensures quick and easy installation.

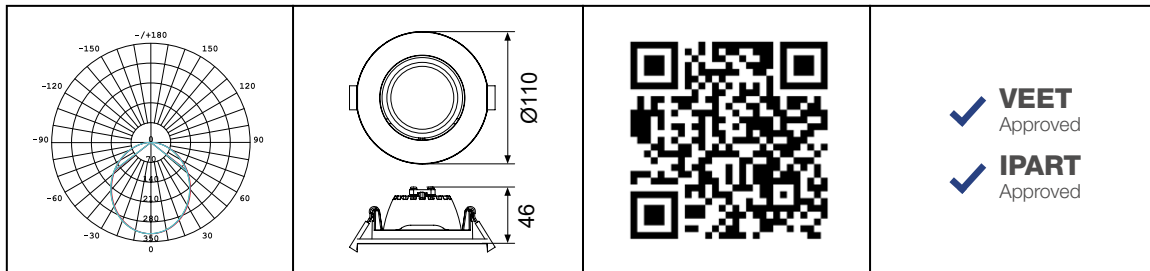

PRODUCT DATA

Order Code	172007A
Voltage	220-240V
Wattage	11W
Lumen Output	800Lm
CCT	3000K
IP Rating	IP20
IC Rating	CA90
Beam Angle	100°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Gimbal - up to 40° tilt
Cutout Size	Ø90mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.37
Lifetime L70B50	35,000 hours
Warranty	5 years



Features


- Tri-Colour
- Constant current driver
- 40° gimbal angle
- Pre-wired flex & plug
- 5 year warranty

Applications

Residential, Hotels,
Shops

Warranty

5 years

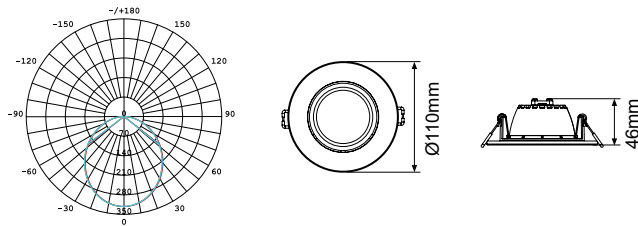

Product Data

Order Code	Part No.	Wattage	CCT	Lumen Output	Beam Angle	Cutout Size	Weight (kg)
172086	172086	11W	3K / 4K / 5K	800 / 850 / 850Lm	100°	Ø92mm	0.30

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9



Specifications are for reference only and may be changed without prior notice.