


SUMMARY

An 11W metal downlight solution for commercial and residential applications. Built to last, it features a metal body for durability and an opal polycarbonate diffuser for superior lighting comfort. It also features a remote dimmable driver and a pre-wired flex and plug. With Tri-Colour selectable technology, it offers the flexibility and convenience of 3 colour temperatures in 1 fitting. Rated IP54 and IC-4 for peace of mind, this fitting can be safely installed outside under eaves, in wet areas like bathroom and abutted against thermal building materials like insulation.

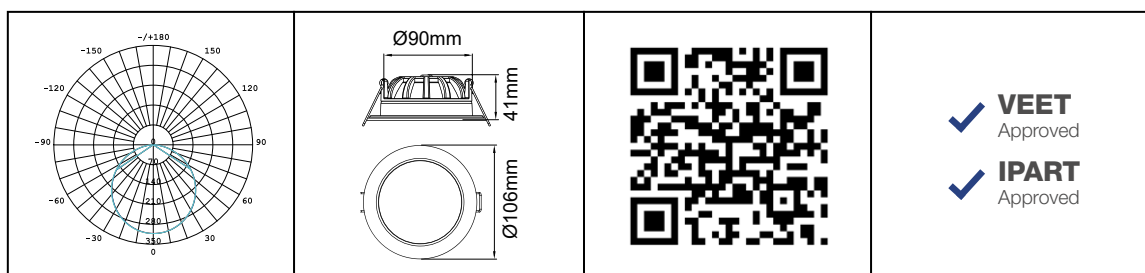

PRODUCT DATA

Order Code	171002
Voltage	220-240V
Wattage	11W
Lumen Output 3K	850Lm
Lumen Output 4K	950Lm
Lumen Output 5K	900Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K
IP Rating	IP54
IC Rating	IC-4
Beam Angle	110°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Recessed
Cutout Size	Ø90mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.30
Lifetime L70B50	50,000 hours
Warranty	5 years



SUMMARY

An 11W metal downlight solution for commercial and residential applications. Built to last, it features a metal body for durability and an opal polycarbonate diffuser for superior lighting comfort. It also features a remote dimmable driver and a pre-wired flex and plug. With Tri-Colour selectable technology, it offers the flexibility and convenience of 3 colour temperatures in 1 fitting. Rated IP54 and IC-4 for peace of mind, this fitting can be safely installed outside under eaves, in wet areas like bathroom and abutted against thermal building materials like insulation.



			<p>✓ VEET Approved</p> <p>✓ IPART Approved</p>
--	--	--	--

PRODUCT DATA

Order Code	171001
Voltage	220-240V
Wattage	11W
Lumen Output 3K	850Lm
Lumen Output 4K	950Lm
Lumen Output 5K	900Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K
IP Rating	IP54
IC Rating	IC-4
Beam Angle	110°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Flush
Cutout Size	Ø90mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.30
Lifetime L70B50	50,000 hours
Warranty	5 years

