


SUMMARY

This versatile DALI 2.0 driver will convert most of our LED batten into DALI compliant fittings. Capable of delivering a varied combination of Current, Output and Forward Voltage settings to suit the desired need.

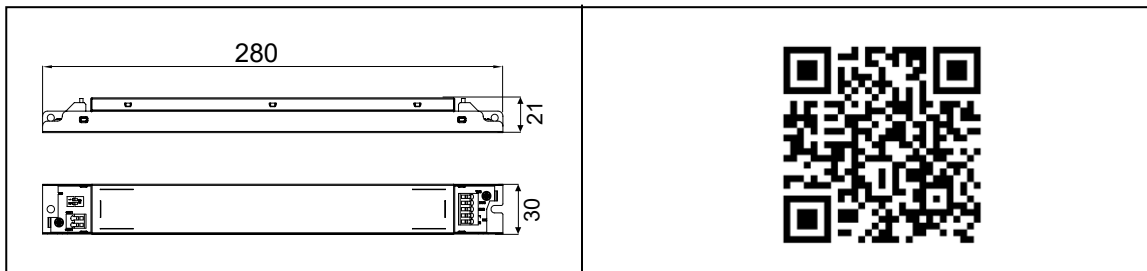

PRODUCT DATA

Order Code	2227			
Output Current	200 mA	250 mA	300 mA	350 mA
Max. Output Power	28W	35W	42W	49W
Min. Forward Voltage	80V	80V	80V	80V
Max. Forward Voltage	140V	140V	140V	140V
Typ. power consumption (230V, 50Hz, full load)	30W	37W	45W	53W
Typ. current consumption (230V, 50Hz, full load)	137 mA	167 mA	200 mA	230 mA
IP Rating	IP20			
Compatibility	Stellar V Wide: 211025DS, 211026DS, 211025DEMS, 211026DEMS. Stellar V: 211023DS, 211024DEMS. Tempest V: 211021DS, 211021DEMS, 211022DEMS.			
Warranty	5 years			

