


SUMMARY

The Destiny Plus low UGR is a highly efficient low glare edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 13mm thin. It features a pre-wired flex and plug for quick and easy installation. It also features CRI rating of Ra>80 and a MacAdams rating of SDCM<3. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and a micro-prism diffuser.

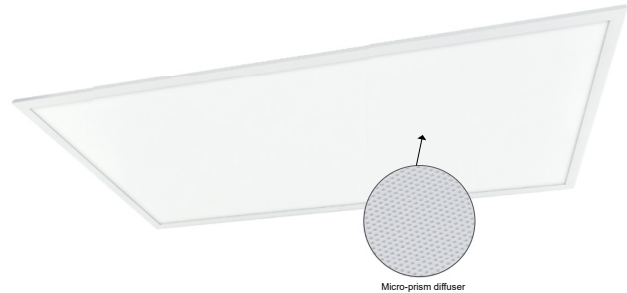

Micro-prism diffuser

			<ul style="list-style-type: none"> ✓ VEET Approved ✓ IPART Approved
--	--	--	-----------------------------------------------------------------------------------------------------------


PRODUCT DATA

Order Code	223364
Voltage	220-240V
Wattage	50W
Lumen Output	5000Lm
CCT	4000K
IP Rating	IP40
UGR Rating	UGR<19
MacAdams Rating	SDCM≤3
CRI Rating	Ra≥80
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote Flicker-Free
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Micro-prism diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	4.62
Lifetime L80B50	50,000 hours
Warranty	5 years



SUMMARY

The Destiny Plus low UGR is a highly efficient low glare edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 13mm thin. It features a pre-wired flex and plug for quick and easy installation. It also features CRI rating of Ra>80 and a MacAdams rating of SDCM<3. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and a micro-prism diffuser.

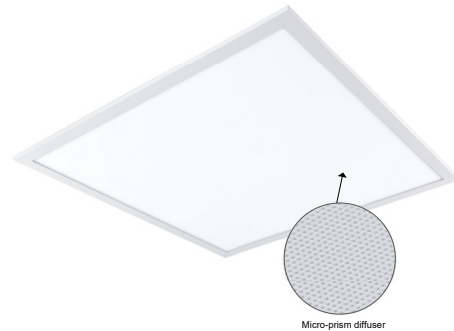

<p>A light distribution diagram showing a circular beam with a diameter of 13mm and a beam angle of 90°. The diagram includes UGR values ranging from 0 to 180 and CRI values ranging from 80 to 100.</p>	<p>Technical drawing of the panel showing dimensions: 595mm x 595mm and 13mm thickness.</p>		<ul style="list-style-type: none"> ✓ VEET Approved ✓ IPART Approved
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------	--	-----------------------------------------------------------------------------------------------------------


PRODUCT DATA

Order Code	223344
Voltage	220-240V
Wattage	32W
Lumen Output	3400Lm
CCT	4000K
IP Rating	IP40
UGR Rating	UGR<19
MacAdams Rating	SDCM≤3
CRI Rating	Ra≥80
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Micro-prism diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.95
Lifetime L80B50	50,000 hours
Warranty	5 years



SUMMARY

The Destiny Plus low UGR is a highly efficient low glare edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 13mm thin. It features a pre-wired flex and plug for quick and easy installation. It also features CRI rating of Ra>80 and a MacAdams rating of SDCM<3. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and a micro-prism diffuser.

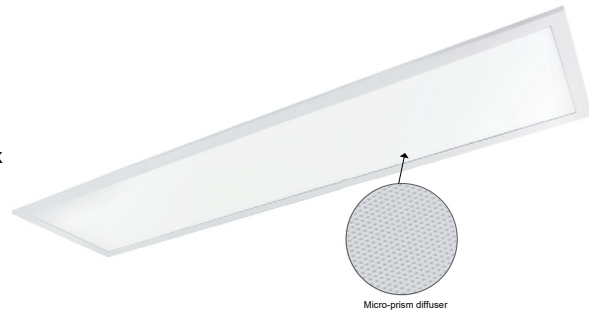

Micro-prism diffuser

			<p>✓ VEET Approved</p> <p>✓ IPART Approved</p>
--	--	--	----------------------------------------------------------------------

PRODUCT DATA

Order Code	223354
Voltage	220-240V
Wattage	32W
Lumen Output	3400Lm
CCT	4000K
IP Rating	IP40
UGR Rating	UGR<19
MacAdams Rating	SDCM≤3
CRI Rating	Ra≥80
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Micro-prism diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	2.12
Lifetime L80B50	50,000 hours
Warranty	5 years



SUMMARY

The Destiny Plus low UGR is a highly efficient low glare edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 13mm thin. It features a pre-wired flex and plug for quick and easy installation. It also features CRI rating of Ra>80 and a MacAdams rating of SDCM<3. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and a micro-prism diffuser.



			<p>✓ VEET Approved</p> <p>✓ IPART Approved</p>
--	--	--	----------------------------------------------------------------------

PRODUCT DATA

Order Code	223334
Voltage	220-240V
Wattage	17W
Lumen Output	1600Lm
CCT	4000K
IP Rating	IP40
UGR Rating	UGR<19
MacAdams Rating	SDCM≤3
CRI Rating	Ra≥80
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Micro-prism diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.16
Lifetime L80B50	50,000 hours
Warranty	5 years

