


SUMMARY

The Destiny Plus tri-colour is a highly efficient edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 15mm thin. It features Tri-Colour selectable technology, giving installers the choice of 3 colour temperatures in 1 fitting, and a pre-wired flex and plug for quick and easy installation. It has a CRI rating of $Ra > 80$ and a MacAdams rating of $SDCM < 4$. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and an opal polycarbonate diffuser.

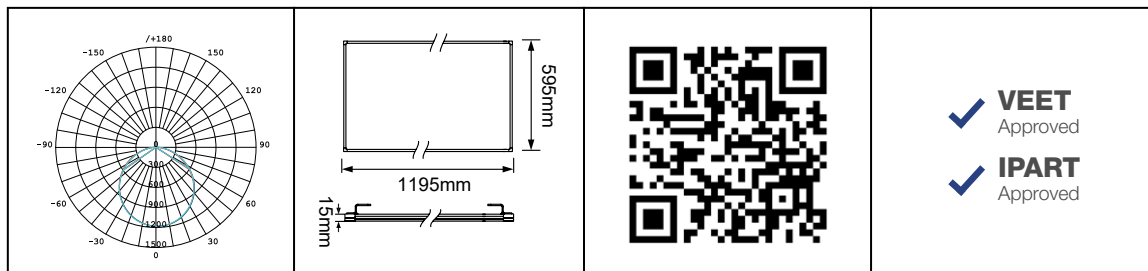


PRODUCT DATA

Order Code	221003
Voltage	220-240V
Wattage	50W
Lumen Output 4K	5000Lm
Lumen Output 5K	5100Lm
Lumen Output 6.5K	5000Lm
CCT	Tri-Colour Selectable - 4K / 5K / 6.5K
IP Rating	IP40
UGR Rating	UGR<22
MacAdams Rating	SDCM≤4
CRI Rating	Ra≥80
Beam Angle	110°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Opal polycarbonate diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	4.31
Lifetime L70B50	50,000 hours
Warranty	5 years



SUMMARY

The Destiny Plus tri-colour is a highly efficient edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 15mm thin. It features Tri-Colour selectable technology, giving installers the choice of 3 colour temperatures in 1 fitting, and a pre-wired flex and plug for quick and easy installation. It has a CRI rating of Ra>80 and a MacAdams rating of SDCM<4. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and an opal polycarbonate diffuser.

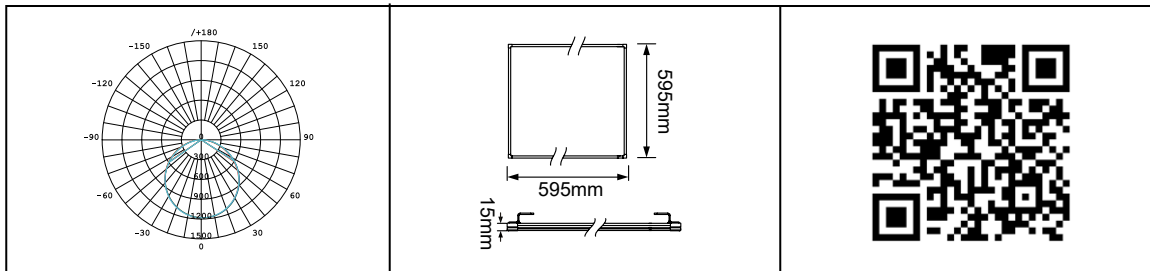

PRODUCT DATA

Order Code	221001
Voltage	220-240V
Wattage	32W
Lumen Output 4K	3200Lm
Lumen Output 5K	3400Lm
Lumen Output 6.5K	3200Lm
CCT	Tri-Colour Selectable - 4K / 5K / 6.5K
IP Rating	IP40
UGR Rating	UGR<22
MacAdams Rating	SDCM≤4
CRI Rating	Ra≥80
Beam Angle	110°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Opal polycarbonate diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.95
Lifetime L70B50	50,000 hours
Warranty	5 years



SUMMARY

The Destiny Plus tri-colour is a highly efficient edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 15mm thin. It features Tri-Colour selectable technology, giving installers the choice of 3 colour temperatures in 1 fitting, and a pre-wired flex and plug for quick and easy installation. It has a CRI rating of Ra>80 and a MacAdams rating of SDCM<4. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and an opal polycarbonate diffuser.



			<p>✓ VEET Approved</p> <p>✓ IPART Approved</p>
--	--	--	--


PRODUCT DATA

Order Code	221002
Voltage	220-240V
Wattage	32W
Lumen Output 4K	3200Lm
Lumen Output 5K	3400Lm
Lumen Output 6.5K	3200Lm
CCT	Tri-Colour Selectable - 4K / 5K / 6.5K
IP Rating	IP40
UGR Rating	UGR<22
MacAdams Rating	SDCM≤4
CRI Rating	Ra≥80
Beam Angle	110°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Opal polycarbonate diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	2.05
Lifetime L70B50	50,000 hours
Warranty	5 years



SUMMARY

The Destiny Plus tri-colour is a highly efficient edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 15mm thin. It features Tri-Colour selectable technology, giving installers the choice of 3 colour temperatures in 1 fitting, and a pre-wired flex and plug for quick and easy installation. It has a CRI rating of $Ra > 80$ and a MacAdams rating of $SDCM < 4$. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and an opal polycarbonate diffuser.

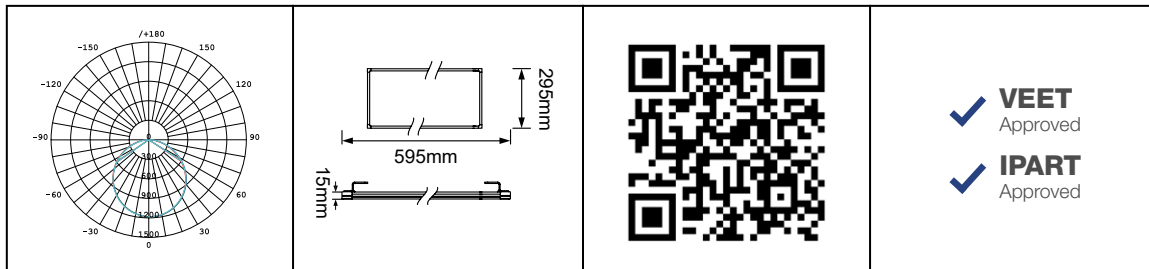

PRODUCT DATA

Order Code	221000
Voltage	220-240V
Wattage	17W
Lumen Output 4K	1600Lm
Lumen Output 5K	1700Lm
Lumen Output 6.5K	1600Lm
CCT	Tri-Colour Selectable - 4K / 5K / 6.5K
IP Rating	IP40
UGR Rating	UGR<22
MacAdams Rating	$SDCM \leq 4$
CRI Rating	$Ra \geq 80$
Beam Angle	110°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Opal polycarbonate diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.17
Lifetime L70B50	50,000 hours
Warranty	5 years

