


SUMMARY

The Marklite is a deep set, low glare downlight solution for residential and commercial applications. It features an integrated Flicker-Free driver for superior lighting comfort and Tri-Colour selectable technology offering the flexibility and convenience of 3 colour temperatures in 1 fitting. Installers can now cater to a broader range of needs with fewer variants, saving time and money. Rated IP44 and IC-4 for peace of mind, it can be safely installed in wet areas like bathrooms and abutted against thermal building materials like insulation.

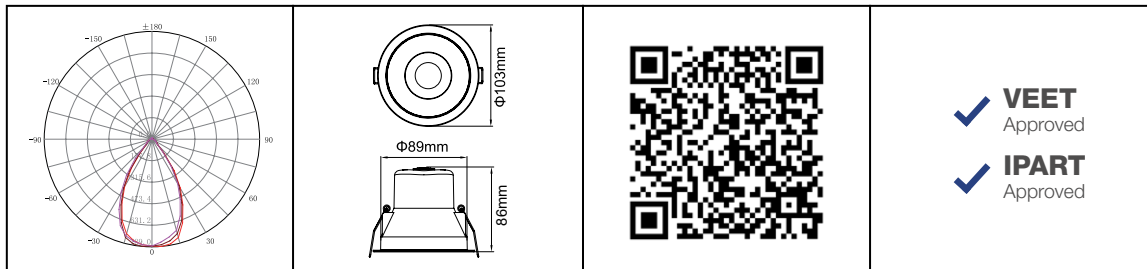


PRODUCT DATA

Order Code	171014
Voltage	220-240V
Wattage	9W
Lumen Output 3K	750Lm
Lumen Output 4K & 5K	800Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K
IP Rating	IP44
IC Rating	IC-4
Beam Angle	60°
Light Source	SMD Chips
Driver	Integrated Flicker-Free
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Deep set
Cutout Size	Ø90mm
Construction	Polycarbonate body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.24
Lifetime L70B50	35,000 hours
Warranty	5 years



SUMMARY

The Marklite is a deep set, low glare downlight solution for residential and commercial applications. It features an integrated Flicker-Free driver for superior lighting comfort and Tri-Colour selectable technology offering the flexibility and convenience of 3 colour temperatures in 1 fitting. Installers can now cater to a broader range of needs with fewer variants, saving time and money. Rated IP54 and IC-4 for peace of mind, it can be safely installed in wet areas like bathrooms and abutted against thermal building materials like insulation.

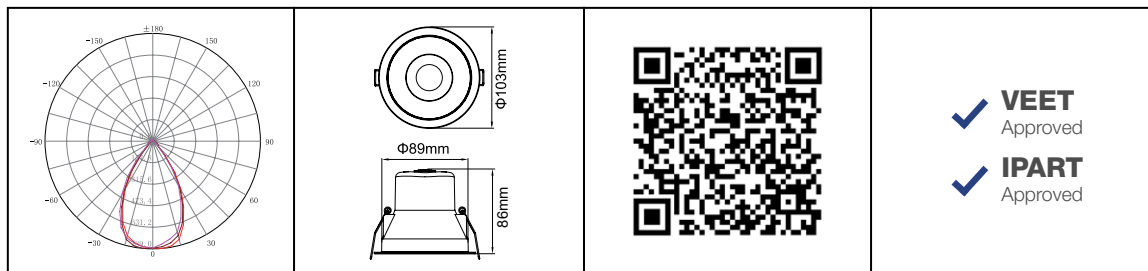

PRODUCT DATA

Order Code	171014BK
Voltage	220-240V
Wattage	9W
Lumen Output 3K	700Lm
Lumen Output 4K & 5K	750Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K
IP Rating	IP44
IC Rating	IC-4
Beam Angle	60°
Light Source	SMD Chips
Driver	Integrated Flicker-Free
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Deep set
Cutout Size	Ø90mm
Construction	Polycarbonate body / opal polycarbonate diffuser
Fitting Colour	Black
PF	0.9
Net Weight (kg)	0.24
Lifetime L70B50	35,000 hours
Warranty	5 years

