

**SUMMARY**

The Oval Mini is a compact bunker for residential and commercial applications. It features Tri-Colour and Multi-Watt selectable technologies offering the flexibility and convenience of 3 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Incorporating a Flicker-Free driver for superior lighting comfort, it is rated IP65 and IK08 to suit harsh outdoor conditions.



			<p>✓ <b>VEET</b> Approved</p> <p>✓ <b>IPART</b> Approved</p>
--	--	--	--

**PRODUCT DATA**

Order Code	281008	
Voltage	220-240V	
Wattage	Multi-Watt Selectable	
	8W	5W
Lumen Output 3K	700Lm	450Lm
Lumen Output 4K & 5K	750Lm	500Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K	
IP Rating	IP54	
IK Rating	IK08	
CRI Rating	Ra≥80	
Beam Angle	120°	
Light Source	SMD Chips	
Driver	Integrated Flicker-Free	
Dimmable	No	
Construction	Polycarbonate body / opal polycarbonate diffuser	
Fitting Colour	White	
PF	0.9	
Net Weight (kg)	0.16	
Lifetime L70B50	25,000 hours	
Warranty	3 years	



**SUMMARY**

The Oval Mini is a compact bunker for residential and commercial applications. It features Tri-Colour and Multi-Watt selectable technologies offering the flexibility and convenience of 3 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Incorporating a Flicker-Free driver for superior lighting comfort, it is rated IP65 and IK08 to suit harsh outdoor conditions.



			<p>✓ <b>VEET</b> Approved</p> <p>✓ <b>IPART</b> Approved</p>
--	--	--	--


**PRODUCT DATA**

Order Code	281006	
Voltage	220-240V	
Wattage	Multi-Watt Selectable	
	8W	5W
Lumen Output 3K	700Lm	450Lm
Lumen Output 4K & 5K	750Lm	500Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K	
IP Rating	IP54	
IK Rating	IK08	
CRI Rating	Ra≥80	
Beam Angle	120°	
Light Source	SMD Chips	
Driver	Integrated Flicker-Free	
Dimmable	No	
Construction	Polycarbonate body / opal polycarbonate diffuser	
Fitting Colour	Black	
PF	0.9	
Net Weight (kg)	0.16	
Lifetime L70B50	25,000 hours	
Warranty	3 years	



## SUMMARY

The Oval Mini is a compact bunker for residential and commercial applications. It features Tri-Colour and Multi-Watt selectable technologies offering the flexibility and choice of 3 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Incorporating a Flicker-Free driver for superior lighting comfort, it is rated IP65 and IK08 to suit harsh outdoor conditions. This fitting incorporated a PIR sensor for added convenience and security.

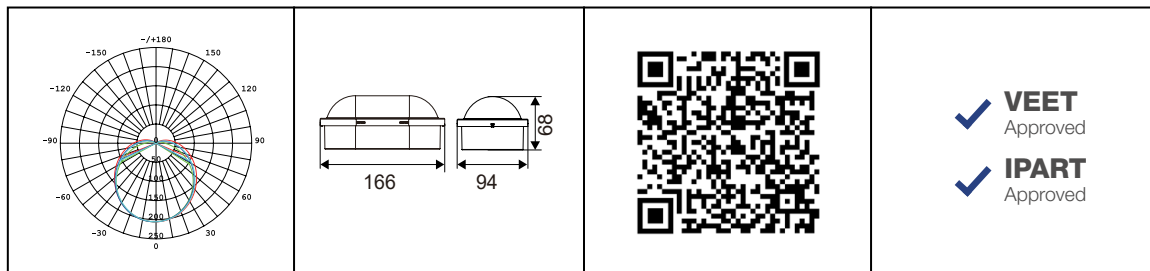


## PRODUCT DATA

Order Code	281008S	
Voltage	220-240V	
Wattage	Multi-Watt Selectable	
	8W	5W
Lumen Output 3K	700Lm	450Lm
Lumen Output 4K & 5K	750Lm	500Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K	
IP Rating	IP54	
IK Rating	IK08	
CRI Rating	Ra≥80	
Beam Angle	120°	
Light Source	SMD Chips	
Driver	Integrated Flicker-Free	
Dimmable	No	
Construction	Polycarbonate body / opal polycarbonate diffuser	
Fitting Colour	White	
PF	0.9	
Net Weight (kg)	0.20	
Lifetime L70B50	25,000 hours	
Warranty	3 years	



## SUMMARY

The Oval Mini is a compact bunker for residential and commercial applications. It features Tri-Colour and Multi-Watt selectable technologies offering the flexibility and choice of 3 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Incorporating a Flicker-Free driver for superior lighting comfort, it is rated IP65 and IK08 to suit harsh outdoor conditions. This fitting incorporated a PIR sensor for added convenience and security.

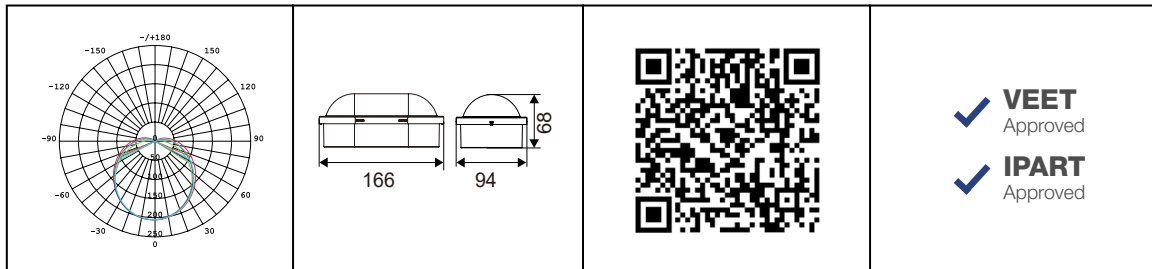

## PRODUCT DATA

Order Code	281006S	
Voltage	220-240V	
Wattage	Multi-Watt Selectable	
	8W	5W
Lumen Output 3K	700Lm	450Lm
Lumen Output 4K & 5K	750Lm	500Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5K	
IP Rating	IP54	
IK Rating	IK08	
CRI Rating	Ra≥80	
Beam Angle	120°	
Light Source	SMD Chips	
Driver	Integrated Flicker-Free	
Dimmable	No	
Construction	Polycarbonate body / opal polycarbonate diffuser	
Fitting Colour	Black	
PF	0.9	
Net Weight (kg)	0.20	
Lifetime L70B50	25,000 hours	
Warranty	3 years	

