

SUMMARY

The Plastial G3 is a high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy, this downlight incorporates an integrated dimmable driver. Rated to IC-4, this downlight can be safely installed under ceiling insulation.



			<ul style="list-style-type: none"> VEET Approved IPART Approved
--	--	--	---


PRODUCT DATA

Order Code	173353
Voltage	220-240V
Wattage	7W
Lumen Output 3K	750Lm
CCT	3000K
IP Rating	IP54
IC Rating	IC-4
Beam Angle	100°
Light Source	SMD Chips
Driver	Integrated
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Recessed
Cutout Size	Ø90mm
Construction	Polycarbonate body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.20
Lifetime L70B50	35,000 hours
Warranty	5 years



SUMMARY

The Plastial G3 is a high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy, this downlight incorporates an integrated dimmable driver. Rated to IC-4, this downlight can be safely installed under ceiling insulation.

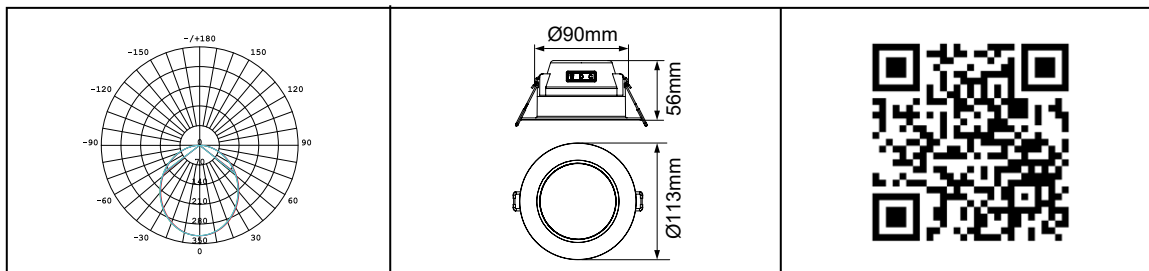

PRODUCT DATA

Order Code	173354
Voltage	220-240V
Wattage	7W
Lumen Output	800Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC-4
Beam Angle	100°
Light Source	SMD Chips
Driver	Integrated
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Recessed
Cutout Size	Ø90mm
Construction	Polycarbonate body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.20
Lifetime L70B50	35,000 hours
Warranty	5 years

