


**SUMMARY**

The Plastial G3 Mini is a high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy up to 100Lm/W, this downlight features Tri-Colour Selectable technology, giving installers a choice of 3 colour temperatures within 1 fitting for individual preference or application requirements. Incorporating an integrated dimmable driver, the Plastial G3 Mini is rated to IC-4 allowing it to be safely installed under ceiling insulation.

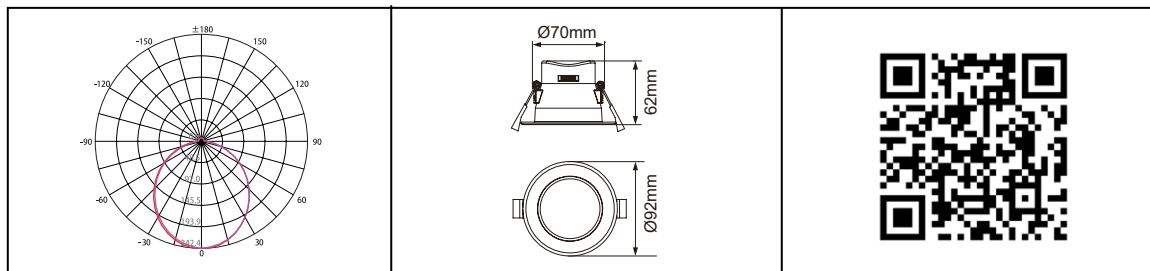


**PRODUCT DATA**

Order Code	171013
Voltage	220-240V
Wattage	7W
Lumen Output 3K	600Lm
Lumen Output 4K & 5.7K	700Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5.7K
IP Rating	IP44
IC Rating	IC-4
Beam Angle	100°
Light Source	SMD Chips
Driver	Integrated
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Recessed
Cutout Size	Ø70mm
Construction	Polycarbonate body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.20
Lifetime L70B50	35,000 hours
Warranty	5 years



**SUMMARY**

The Plastial G3 Mini is a high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy up to 100Lm/W, this downlight features Tri-Colour Selectable technology, giving installers a choice of 3 colour temperatures within 1 fitting for individual preference or application requirements. Incorporating an integrated dimmable driver, the Plastial G3 Mini is rated to IC-4 allowing it to be safely installed under ceiling insulation.

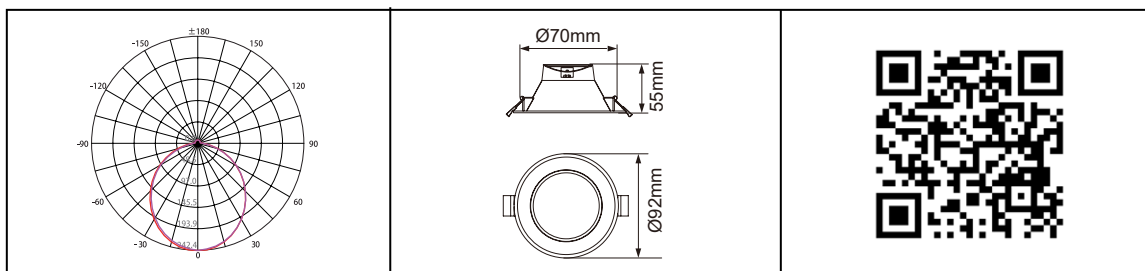

**PRODUCT DATA**

Order Code	171012
Voltage	220-240V
Wattage	7W
Lumen Output 3K	600Lm
Lumen Output 4K & 5.7K	700Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5.7K
IP Rating	IP44
IC Rating	IC-4
Beam Angle	100°
Light Source	SMD Chips
Driver	Integrated
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Flush
Cutout Size	Ø70mm
Construction	Polycarbonate body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.18
Lifetime L70B50	35,000 hours
Warranty	5 years

