

## Features


- Type-3 distribution
- Die-cast aluminium body
- Rotatable lens
- High efficiency SMD LED chips

## Applications

Commercial, Industrial, Parking Lots,  
Large Urban Spaces

## Warranty

5 years

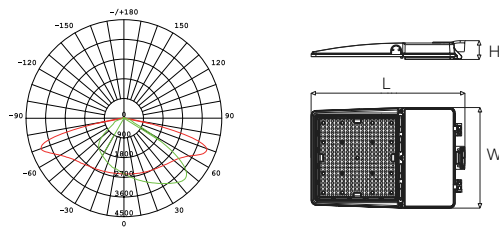

### Product Data

Order Code	Part No.	Wattage	CCT	Lumen Output	Beam Angle	Size (LxWxH)mm	Weight (kg)
463005	463005	75W	5000K	11250Lm	Type III	428x247x55	3.45
463015	463015	100W	5000K	15000Lm	Type III	428x247x55	3.45
463025	463025	150W	5000K	22500Lm	Type III	428x247x55	3.45

[1] Operating temperature: -30°C~+50°C

[2] Voltage: 220-240V

[3] PF: 0.9

### Optional Accessories

Item	Order Code
Photocell	463069
Slip Fitter	463079
U-Bracket 247	463119



Specifications are for reference only and may be changed without prior notice.