

SUMMARY

The SupValite V is a floodlight solution for residential applications. It features Five-Colour and Multi-Watt selectable technologies offering the flexibility and choice of 5 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Rated IP65 and IK08, it is perfectly suited to harsh outdoor conditions. This fitting incorporates a PIR sensor for added convenience and security.



			<ul style="list-style-type: none"> VEET Approved IPART Approved
--	--	--	---


PRODUCT DATA

Order Code	271000S	
Voltage	220-240V	
Wattage	Multi-Watt Selectable	
	30W	20W
Lumen Output 3K	3000Lm	2000Lm
Lumen Output 4K, 5K, 5.7K & 6.5K	3000Lm	2000Lm
CCT	Five-Colour Selectable - 3K / 4K / 5K / 5.7K / 6.5K	
IP Rating	IP65	
IK Rating	IK08	
CRI Rating	Ra≥80	
Beam Angle	110°	
Light Source	SMD Chips	
Driver	Integrated	
Dimmable	No	
Connection	1.2m flex & plug	
Construction	Aluminium body / tempered etched glass diffuser	
Fitting Colour	Black	
PF	0.9	
Net Weight (kg)	0.74	
Lifetime L70B50	50,000 hours	
Warranty	5 years	



SUMMARY

The SupValite V is a floodlight solution for residential applications. It features Five-Colour and Multi-Watt selectable technologies offering the flexibility and convenience of 5 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Rated IP65 and IK08, it is perfectly suited to harsh outdoor conditions.

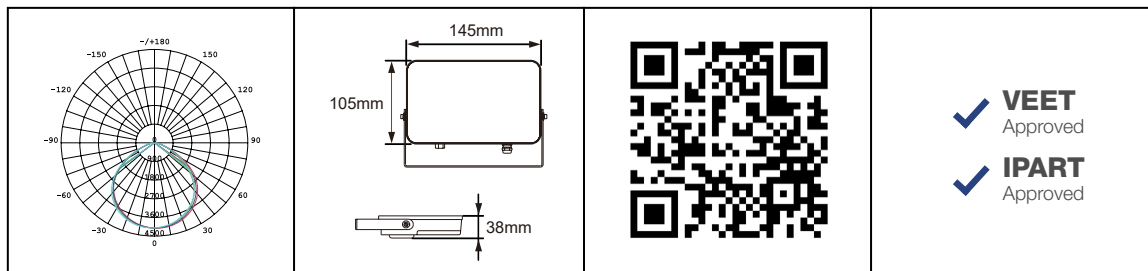

PRODUCT DATA

Order Code	271000	
Voltage	220-240V	
Wattage	Multi-Watt Selectable	
	30W	20W
Lumen Output 3K	3000Lm	2000Lm
Lumen Output 4K, 5K, 5.7K & 6.5K	3000Lm	2000Lm
CCT	Five-Colour Selectable - 3K / 4K / 5K / 5.7K / 6.5K	
IP Rating	IP65	
IK Rating	IK08	
CRI Rating	Ra≥80	
Beam Angle	110°	
Light Source	SMD Chips	
Driver	Integrated	
Dimmable	No	
Connection	1.2m flex & plug	
Construction	Aluminium body / tempered etched glass diffuser	
Fitting Colour	Black	
PF	0.9	
Net Weight (kg)	0.67	
Lifetime L70B50	50,000 hours	
Warranty	5 years	



SUMMARY

The SupValite V is a floodlight solution for residential applications. It features Five-Colour and Multi-Watt selectable technologies offering the flexibility and choice of 5 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Rated IP65 and IK08, it is perfectly suited to harsh outdoor conditions. This fitting incorporates a PIR sensor for added convenience and security.



			<p>✓ VEET Approved</p> <p>✓ IPART Approved</p>
--	--	--	--


PRODUCT DATA

Order Code	271001S
Voltage	220-240V
Wattage	50W
Lumen Output	5000Lm
CCT	Five-Colour Selectable - 3K / 4K / 5K / 5.7K / 6.5K
IP Rating	IP65
IK Rating	IK08
CRI Rating	Ra≥80
Beam Angle	110°
Light Source	SMD Chips
Driver	Integrated
Dimmable	No
Connection	1.2m flex & plug
Construction	Aluminium body / tempered etched glass diffuser
Fitting Colour	Black
PF	0.9
Net Weight (kg)	1.09
Lifetime L70B50	50,000 hours
Warranty	5 years



SUMMARY

The SupValite V is a floodlight solution for residential applications. It features Five-Colour and Multi-Watt selectable technologies offering the flexibility and convenience of 5 colour temperatures and 2 wattages in 1 fitting, allowing installers to cater to a broader range of needs with fewer variants. Rated IP65 and IK08, it is perfectly suited to harsh outdoor conditions.

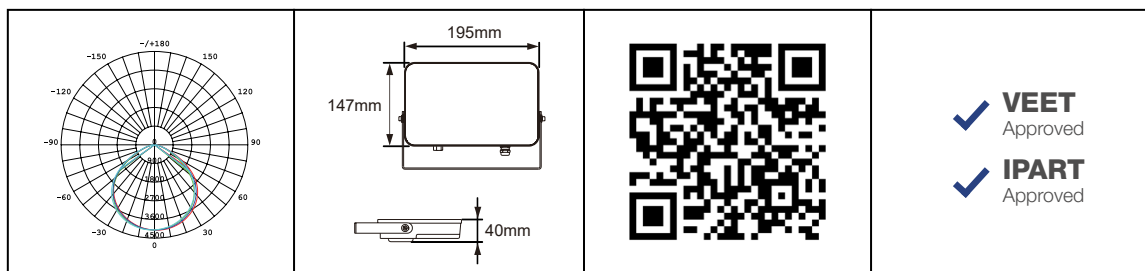

PRODUCT DATA

Order Code	271001
Voltage	220-240V
Wattage	50W
Lumen Output	5000Lm
CCT	Five-Colour Selectable - 3K / 4K / 5K / 5.7K / 6.5K
IP Rating	IP65
IK Rating	IK08
CRI Rating	Ra≥80
Beam Angle	110°
Light Source	SMD Chips
Driver	Integrated
Dimmable	No
Connection	1.2m flex & plug
Construction	Aluminium body / tempered etched glass diffuser
Fitting Colour	Black
PF	0.9
Net Weight (kg)	1.04
Lifetime L70B50	50,000 hours
Warranty	5 years

