

SUMMARY

The TriValite Pro is a deep set, low glare, low profile and high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy, this downlight features Tri-Colour Selectable technology, giving installers a choice of 3 colour temperatures in 1 fitting for individual preference or application requirements. Incorporating a remote dimmable driver, the TriValite Pro is rated to IC-4 allowing it to be safely installed under ceiling insulation.



			<ul style="list-style-type: none"> VEET Approved IPART Approved
--	--	--	---


PRODUCT DATA

Order Code	171015
Voltage	220-240V
Wattage	9W
Lumen Output 3K	750Lm
Lumen Output 4K & 5.7K	800Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5.7K
IP Rating	IP44
IC Rating	IC-4
Beam Angle	60°
CRI	≥83 @ 3K ≥85 @ 4K/5.7K
SDCM	≤3 @ 3K/5.7K ≤6 @ 4K
UGR	<19
Light Source	SMD Chips
Driver	Remote Flicker-Free
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Reflector
Cutout Size	Ø90mm
Construction	Polycarbonate body
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.24
Lifetime L70B50	50,000 hours
Warranty	5 years



SUMMARY

The TriValite Pro is a deep set, low glare, low profile and high performing downlight ideal for commercial and residential applications. Engineered to deliver high lumen efficacy, this downlight features Tri-Colour Selectable technology, giving installers a choice of 3 colour temperatures in 1 fitting for individual preference or application requirements. Incorporating a remote dimmable driver, the TriValite Pro is rated to IC-4 allowing it to be safely installed under ceiling insulation.

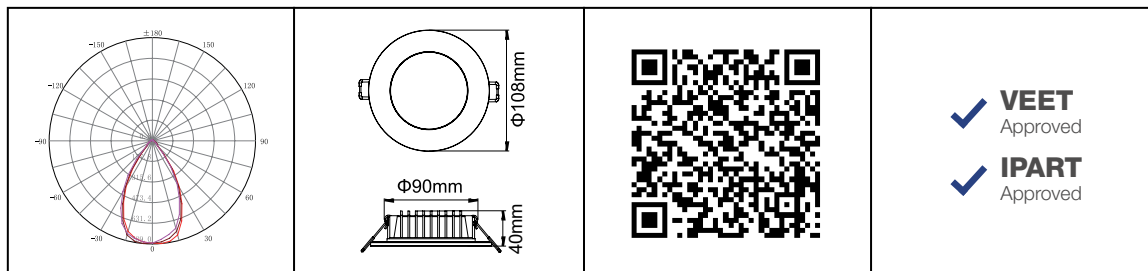

PRODUCT DATA

Order Code	171015BK
Voltage	220-240V
Wattage	9W
Lumen Output 3K	700Lm
Lumen Output 4K & 5.7K	750Lm
CCT	Tri-Colour Selectable - 3K / 4K / 5.7K
IP Rating	IP44
IC Rating	IC-4
Beam Angle	60°
CRI	≥83 @ 3K ≥85 @ 4K/5.7K
SDCM	≤3 @ 3K/5.7K ≤6 @ 4K
UGR	<19
Light Source	SMD Chips
Driver	Remote Flicker-Free
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Dimmer Compatibility List)
Connection	1.2 flex & plug
Fitting Type	Reflector
Cutout Size	Ø90mm
Construction	Polycarbonate body
Fitting Colour	Black
PF	0.9
Net Weight (kg)	0.24
Lifetime L70B50	50,000 hours
Warranty	5 years

