

SUMMARY

The Unit is an IP66 bunker ideal for commercial and residential applications. It features Tri-Colour and Multi-Watt selectable technologies, giving installers a choice of 3 colour temperatures and 3 wattages within 1 fitting. Rated IK10, suitable for high vandalism areas, it has a high impact polycarbonate enclosure that is corrosion and UV resistant. Multiple cable entry points, a large 6mm terminal block and compatibility to 51mm Beza boxes facilitates quick and easy installation.



| | | | |
|--|--|--|--|
| | | | <p>✓ VEET Approved</p> <p>✓ IPART Approved</p> |
|--|--|--|--|

PRODUCT DATA

| | | | |
|----------------------|---|--------|--------|
| Order Code | 281004 | | |
| Voltage | 220-240V | | |
| Wattage | Multi-Watt Selectable | | |
| | 22W | 15W | 10W |
| Lumen Output 3K | 1860Lm | 1400Lm | 930Lm |
| Lumen Output 4K & 5K | 2000Lm | 1500Lm | 1000Lm |
| CCT | Tri-Colour Selectable - 3K / 4K / 5K | | |
| IP Rating | IP66 | | |
| IK Rating | IK10 | | |
| CRI Rating | Ra≥80 | | |
| Beam Angle | 110° | | |
| Light Source | SMD Chips | | |
| Driver | Integrated Flicker-Free | | |
| Dimmable | No | | |
| Construction | Polycarbonate body / opal polycarbonate diffuser | | |
| Fitting Colour | White | | |
| PF | 0.9 | | |
| EMG Classification | C0-C180:D32 / C90-C270:D32 (with emergency kit installed) | | |
| Net Weight (kg) | 0.82 | | |
| Lifetime L70B50 | 50,000 hours | | |
| Warranty | 5 years | | |


OPTIONAL ACCESSORIES

| ITEM | ORDER CODE | ITEM | ORDER CODE |
|--------------------|------------|---------------|------------|
| Eyelid Cover White | 283099 | MW Sensor Kit | 283059 |
| Emergency Kit | 283049 | | |



SUMMARY

The Unit is an IP66 bunker ideal for commercial and residential applications. It features Tri-Colour and Multi-Watt selectable technologies, giving installers a choice of 3 colour temperatures and 3 wattages within 1 fitting. Rated IK10, suitable for high vandalism areas, it has a high impact polycarbonate enclosure that is corrosion and UV resistant. Multiple cable entry points, a large 6mm terminal block and compatibility to 51mm Beza boxes facilitates quick and easy installation.

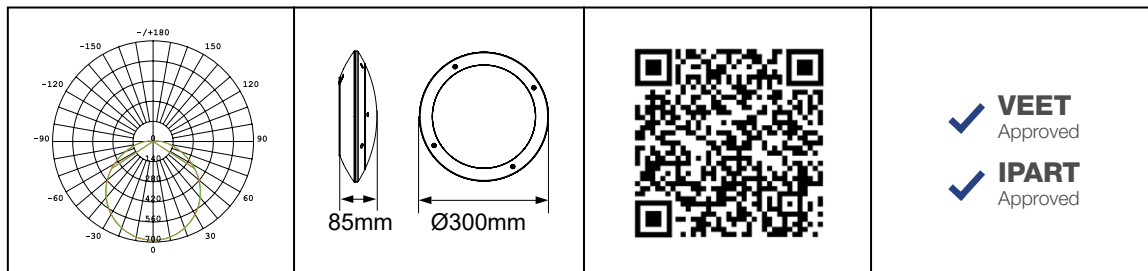

PRODUCT DATA

| | | | |
|----------------------|---|--------|--------|
| Order Code | 281003 | | |
| Voltage | 220-240V | | |
| Wattage | Multi-Watt Selectable | | |
| | 22W | 15W | 10W |
| Lumen Output 3K | 1860Lm | 1400Lm | 930Lm |
| Lumen Output 4K & 5K | 2000Lm | 1500Lm | 1000Lm |
| CCT | Tri-Colour Selectable - 3K / 4K / 5K | | |
| IP Rating | IP66 | | |
| IK Rating | IK10 | | |
| CRI Rating | Ra≥80 | | |
| Beam Angle | 110° | | |
| Light Source | SMD Chips | | |
| Driver | Integrated Flicker-Free | | |
| Dimmable | No | | |
| Construction | Polycarbonate body / opal polycarbonate diffuser | | |
| Fitting Colour | Black | | |
| PF | 0.9 | | |
| EMG Classification | C0-C180:D32 / C90-C270:D32 (with emergency kit installed) | | |
| Net Weight (kg) | 0.82 | | |
| Lifetime L70B50 | 50,000 hours | | |
| Warranty | 5 years | | |

OPTIONAL ACCESSORIES

| ITEM | ORDER CODE | ITEM | ORDER CODE |
|--------------------|------------|---------------|------------|
| Eyelid Cover Black | 283039 | MW Sensor Kit | 283059 |
| Emergency Kit | 283049 | | |

