

Last modification

2022-11-25

ESSEX PE120-BK 9329501049303



The ESSEX is a minimalist linear pendant with a highly efficient LED lighting source. The perfect solution for contemporary residential and commercial spaces. Slim in appearance, the fixture illuminates downwards and softly upwards with the added feature of allowing triac dimming. Available in Black or Brushed-aluminium.

Overview

Family name Essex
Categories Pendants
Mounting Surface

This item includes Diffuser, Suspension

Suspension Type Break Wire

Usage Indoor Lighting,Trade Selection

Color / Material

Fixture ColorBlackFixture MaterialAluminiumCanopy ColorBlackDiffuser ColorOpal

Diffuser Material Polycarbonate

Cable ColorSilverCable MaterialBreak Wire

<u>Size</u>

Fixture Length (cm)119.0Fixture Width (cm)3.5Fixture Height (cm)8.0Canopy Length (cm)52.0Canopy Width (cm)5.0

Specification

1

 Voltage Input
 240V

 Wattage (max)
 40

 Wattage
 10

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.



Globe Type LED integrated SMD

Globe / Light Source qty 2
Globe / Light Source included Yes
Lumens 3200

Color Temperature Natural White

Color Kelvin4000kColor Rendering>82DimmableYesPower Factor>0.90Current Output120

Electrical Protection CLASS I - HIGH VOLTAGE, EARTH REQUIRED

IP rating IP20
Lead and Plug No
Approvals RCM
Assembly Required Yes

Box ContentsBasic mounting screws, InstructionInstallation RequiredYes (by Licensed Electrician only)


Care Instructions Do not use strong liquid cleaners, Wipe clean with a dry cloth

Replacement Warranty *3 Years


<u>Barcode</u>

GTIN 9329501049303

Image -dimensions

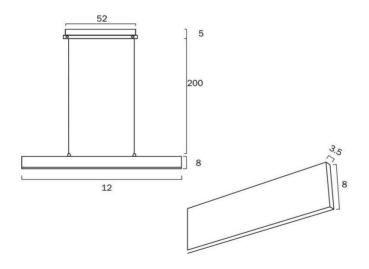

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000. NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

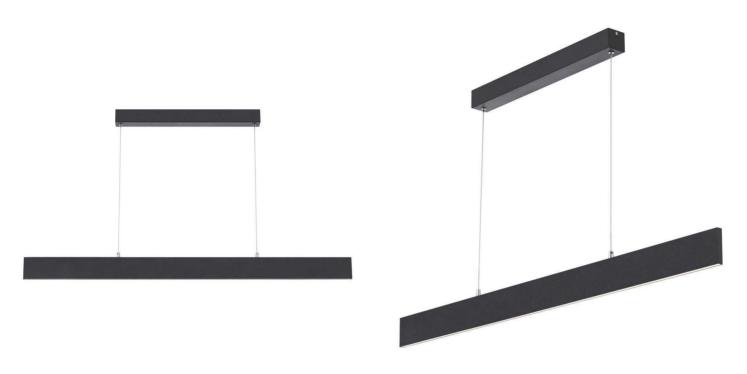




All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

3

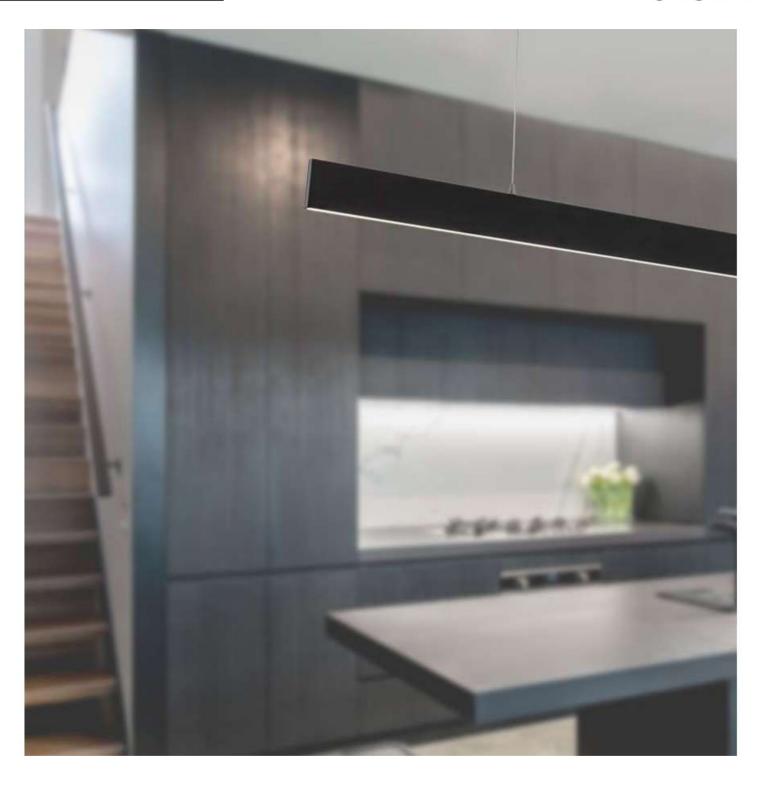

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.



Last modification

2022-11-25

ESSEX PE120-AL 9329501049297



The ESSEX is a minimalist linear pendant with a highly efficient LED lighting source. The perfect solution for contemporary residential and commercial spaces. Slim in appearance, the fixture illuminates downwards and softly upwards with the added feature of allowing triac dimming. Available in Black or Brushed-aluminium.

Overview

Family nameEssexCategoriesPendantsMountingSurface

This item includes Diffuser, Suspension

Suspension Type Break Wire

Usage Indoor Lighting,Trade Selection

Color / Material

Fixture Color Aluminium
Fixture Material Aluminium
Canopy Color Aluminium
Diffuser Color Opal

Diffuser Material Polycarbonate

Cable ColorSilverCable MaterialBreak Wire

<u>Size</u>

Fixture Length (cm)119.0Fixture Width (cm)3.5Fixture Height (cm)8.0Canopy Length (cm)52.0Canopy Width (cm)5.0

Specification

Voltage Input 240V Wattage (max) 40 Wattage 10



Globe Type LED integrated SMD

Globe / Light Source qty 2
Globe / Light Source included Yes
Lumens 3200

Color Temperature Natural White

Color Kelvin4000kColor Rendering>82DimmableYesPower Factor>0.90Current Output120

Electrical Protection CLASS I - HIGH VOLTAGE, EARTH REQUIRED

IP rating IP20
Lead and Plug No
Approvals RCM
Assembly Required Yes

Box ContentsBasic mounting screws, InstructionInstallation RequiredYes (by Licensed Electrician only)


Care Instructions Do not use strong liquid cleaners, Wipe clean with a dry cloth

Replacement Warranty *3 Years

<u>Barcode</u>

GTIN 9329501049297

Image -dimensions

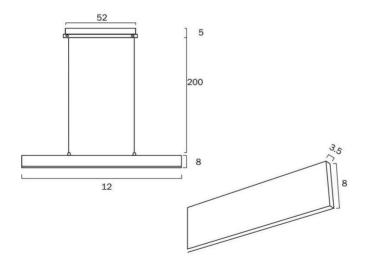


All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000. NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Telbix.



All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

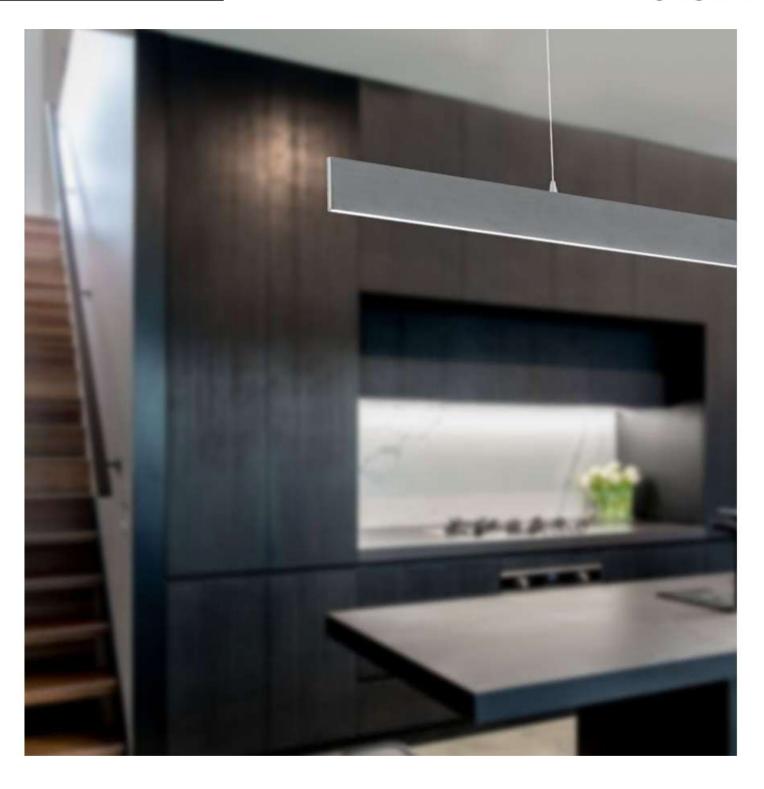

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.

NOTE: All images, descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.