

Expo-10-Rec LED Recessed Downlight



Description


The Expo-10 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.



Specification Features

Input Voltage:	240V AC
Power (W):	10W
IP rating (IP):	IP44
Lumens (lm):	Warm White 3000K - 710lm Neutral White 4000K - 780lm White 5700K - 850lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥90
Beam angle (°):	80°
Dimmable:	Yes
Lifespan (hrs):	50,000hrs
Cutout (p):	Ø90-95mm

Diagrams / Additional

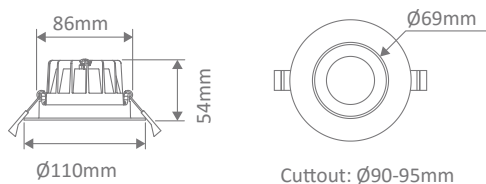

Item No.	Variant		CCT
	Blk	Wht	
EXPO-10-REC	20710	20711	TRIO
	DALI		
	21602	21601	TRIO

Expo-25-Rec LED Recessed Downlight



Description

The Expo-25 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.




Specification Features

Input Voltage:	240V AC
Power (W):	25W
IP rating (IP):	IP44
Lumens (lm):	Warm White 3000K - 2200lm Neutral White 4000K - 2400lm White 5700K - 2600lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥90
Beam angle (°):	80°
Dimmable:	Yes
Lifespan (hrs):	50,000hrs
Cutout (p):	Ø150-165mm



Diagrams / Additional

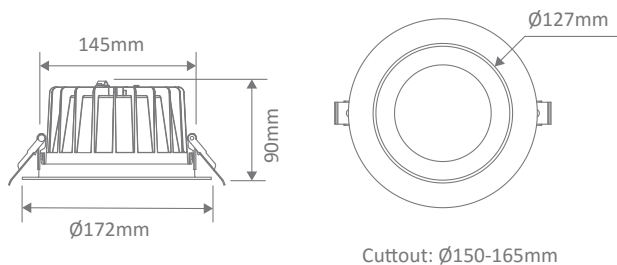

Item No.	Variant		CCT
	Blk	Wht	
EXPO-25-REC	20712	20713	TRIO
	DALI		
	21610	21609	TRIO

Expo-35-Rec LED Recessed Downlight



Description


The Expo-35 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.



Specification Features

Input Voltage:	240V AC
Power (W):	35W
IP rating (IP):	IP44
Lumens (lm):	Warm White 3000K - 3650lm Neutral White 4000K - 3750lm White 5700K - 3850lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K (Switchable)
CRI:	≥90
Beam angle (°):	80°
Dimmable:	Yes
Lifespan (hrs):	50,000hrs
Cutout (p):	Ø200-210mm

Diagrams / Additional

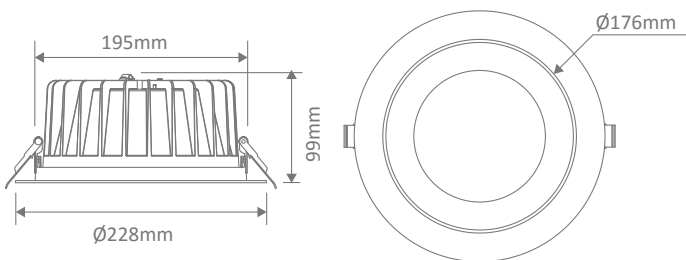

Cutout: Ø200-210mm

Item No.	Variant		CCT
	Blk	Wht	
EXPO-35-REC	20714	20715	TRIO
	DALI		
	21606	21605	TRIO