



COMMISSION DELEGATED REGULATION (EU) 2019/2015
with regard to energy labelling of light sources

EGLO Leuchten GmbH, Heiligkreuz 22, 6136 Pill, AT

General Information



Trade mark	EGLO
Material number	205436
Type	lightbulb
Light colour Complete	WHITE
Illuminant Type (1)	B22-LED-A60
EAN/UPC	9008606247004

Dimensions

Article Diameter (in mm)	60
Article Length (in mm)	105

Technical Information

Equivalent power (W)	40
item-number LED-board (1)	205436
Lighting Technology	LED
Directional Light source	No
Mains light source	Yes
Connected light source	No
Colour-tunable light source	No
High luminance light source	No
Dimmable (bulb, board, stripe,...)	Yes
Energy consumption (kWh/1000h)	5
Rated useful lumen	470
Beam angle (°) - at measurement	360
Color temperature (K)	5000
Nominal wattage (W)	4,5
Chromaticity coordinates x (1)	0,346
Chromaticity coordinates y (1)	0,359
Color rendering index (CRI)	80
Lamp survival factor @3000h	> = 90 %
Lumen maintenance factor @3000h % in decimal number	0,96
Flicker Metric / Pst LM	0,1
Stroboscopic Effect Metric / SVM	0,2

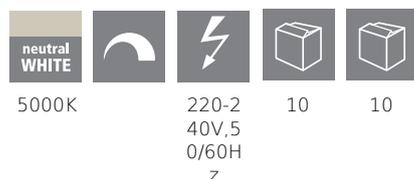



COMMISSION DELEGATED REGULATION (EU) 2019/2015
with regard to energy labelling of light sources

EGLO Leuchten GmbH, Heiligkreuz 22, 6136 Pill, AT

General Information



Trade mark	EGLO
Material number	205435
Type	lightbulb
Light colour Complete	WHITE
Illuminant Type (1)	E27-LED-A60
EAN/UPC	9008606246991

Dimensions

Article Diameter (in mm)	60
Article Length (in mm)	105

Technical Information

Equivalent power (W)	40
item-number LED-board (1)	205435
Lighting Technology	LED
Directional Light source	No
Lamp cap (Socket)	E27
Mains light source	Yes
Connected light source	No
Colour-tunable light source	No
High luminance light source	No
Dimmable (bulb, board, stripe,...)	Yes
Energy consumption (kWh/1000h)	5
Rated useful lumen	470
Beam angle (°) - at measurement	360
Color temperature (K)	5000
Nominal wattage (W)	4,5
Chromaticity coordinates x (1)	0,346
Chromaticity coordinates y (1)	0,359
Color rendering index (CRI)	80
Lamp survival factor @3000h	> = 90 %
Lumen maintenance factor @3000h % in decimal number	0,96
Flicker Metric / Pst LM	0,1
Stroboscopic Effect Metric / SVM	0,2

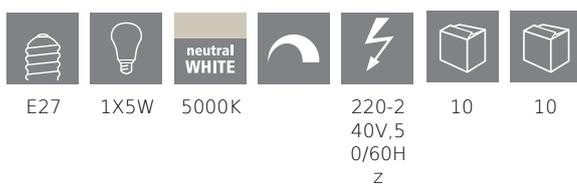



COMMISSION DELEGATED REGULATION (EU) 2019/2015
with regard to energy labelling of light sources

EGLO Leuchten GmbH, Heiligkreuz 22, 6136 Pill, AT

General Information



Trade mark	EGLO
Material number	205434
Type	lightbulb
Light colour Complete	WARM WHITE
Illuminant Type (1)	B22-LED-A60
EAN/UPC	9008606246984

Dimensions

Article Diameter (in mm)	60
Article Length (in mm)	105

Technical Information

Equivalent power (W)	40
item-number LED-board (1)	205434
Lighting Technology	LED
Directional Light source	No
Mains light source	Yes
Connected light source	No
Colour-tunable light source	No
High luminance light source	No
Dimmable (bulb, board, stripe,...)	Yes
Energy consumption (kWh/1000h)	5
Rated useful lumen	470
Beam angle (°) - at measurement	360
Color temperature (K)	2700
Nominal wattage (W)	5
Chromaticity coordinates x (1)	0,463
Chromaticity coordinates y (1)	0,42
Color rendering index (CRI)	80
Lamp survival factor @3000h	> = 90 %
Lumen maintenance factor @3000h % in decimal number	0,96
Displacement factor DF (PF)	0,5
Flicker Metric / Pst LM	0,1
Stroboscopic Effect Metric / SVM	0,2

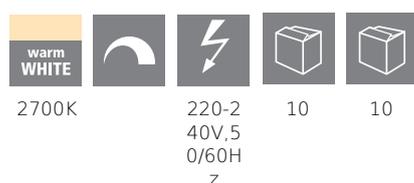



COMMISSION DELEGATED REGULATION (EU) 2019/2015
with regard to energy labelling of light sources

EGLO Leuchten GmbH, Heiligkreuz 22, 6136 Pill, AT

General Information

Trade mark	EGLO
Material number	205433
Type	lightbulb
Light colour Complete	WARM WHITE
Illuminant Type (1)	E27-LED-A60
EAN/UPC	9008606246977

Dimensions

Article Diameter (in mm)	60
Article Length (in mm)	105

Technical Information

Equivalent power (W)	40
item-number LED-board (1)	205433
Lighting Technology	LED
Directional Light source	No
Lamp cap (Socket)	E27
Mains light source	Yes
Connected light source	No
Colour-tunable light source	No
High luminance light source	No
Dimmable (bulb, board, stripe,...)	Yes
Energy consumption (kWh/1000h)	5
Rated useful lumen	470
Beam angle (°) - at measurement	360
Color temperature (K)	2700
Nominal wattage (W)	5
Chromaticity coordinates x (1)	0,463
Chromaticity coordinates y (1)	0,42
Color rendering index (CRI)	80
Lamp survival factor @3000h	> = 90 %
Lumen maintenance factor @3000h % in decimal number	0,96
Displacement factor DF (PF)	0,5
Flicker Metric / Pst LM	0,1
Stroboscopic Effect Metric / SVM	0,2

