


# EMERGENCY TIMER



PROFESSIONAL

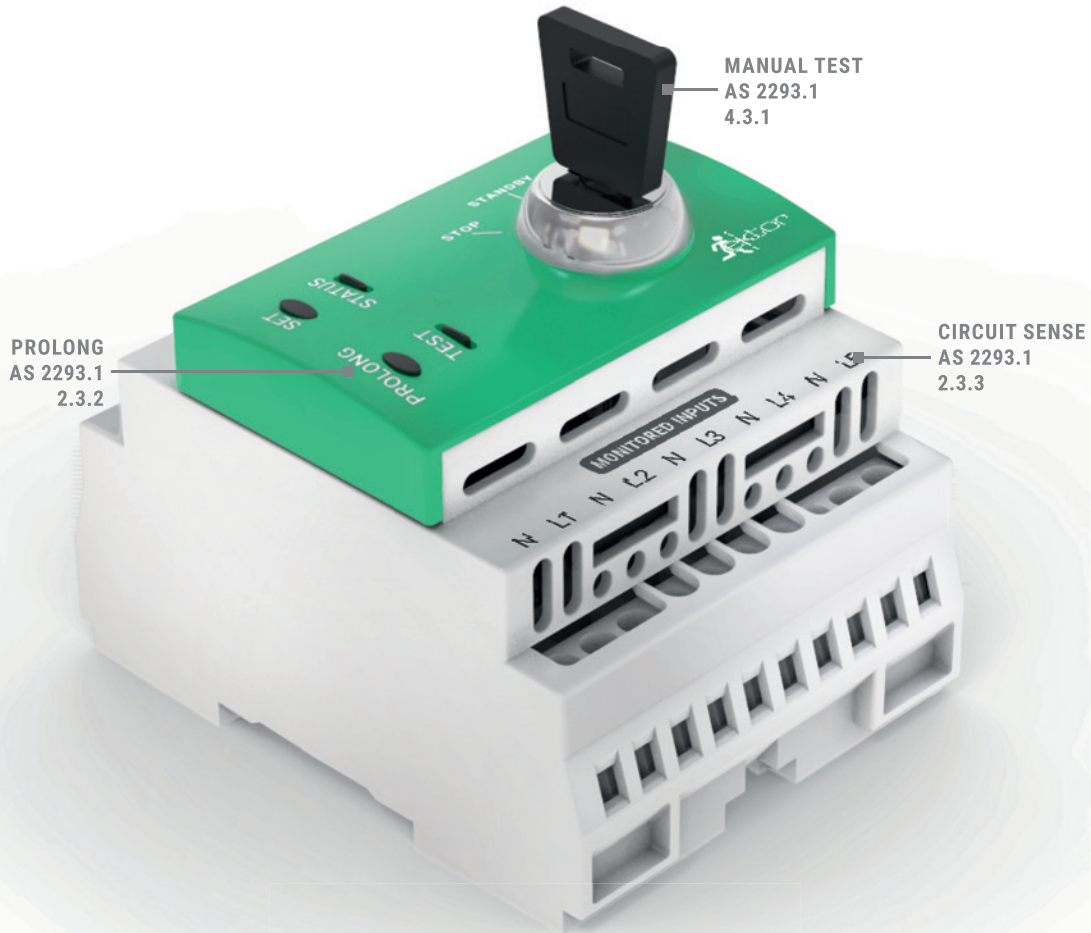

## FEATURES

- Easy configuration and control
- **All in one unit** to meet compliance needs
- **Extend period** to allow walk around inspection
- Suitable single-point and centrally supplied systems
- 5 sensing circuits, link up 6 units for **30 sense circuits**
- **Brown-out trigger** to meet AS/NZS 60598.2.22 Clause 22.7



### MANUAL TEST

Manually operated discharge-test for 90 / 120 min duration



### CIRCUIT SENSE

Each unit has 5 circuit sensing inputs




### PROLONG

Provision for time delay, remains in emergency mode



### COMPLIANT

AS/NZS 60598.2.22  
AS 2293.1

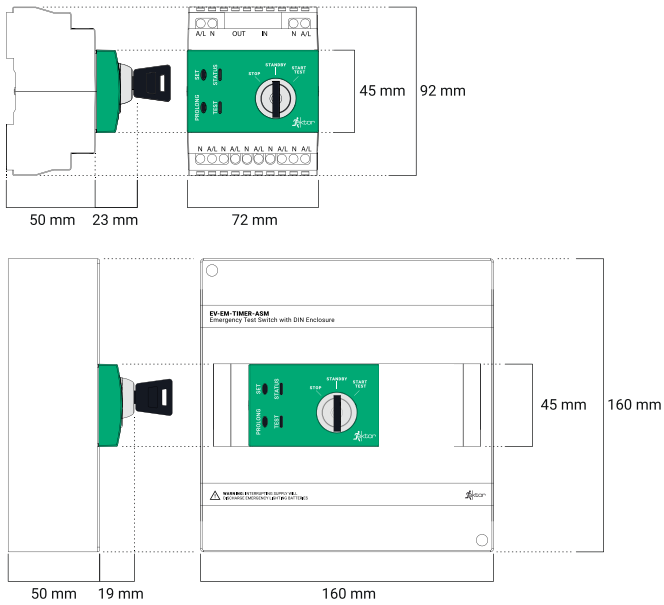

PRODUCT RANGE			
ORDER CODE	PRODUCT NUMBER	SKU	QTY
<b>EV-EM-TIMER*</b> Emergency Test Switch	9336462020029	2002	20
<b>EV-EM-TIMER-ASM*</b> Emergency Test Switch with DIN Enclosure	9336462020036	2003	4

#### GENERAL FEATURES

- Easy configuration and control
- Extended period to allow walk around
- All-in-one unit to meet compliance needs
- Manually operated discharge test (90/120 min duration)
- 5 sensing circuits, links up to 6 units for 30 sense circuits
- Brown-out trigger ensures AS/NZS 60598.2.22 Clause 22.17 is met
- Prolong, provision for time-delay to remain in emergency mode for lighting requiring cooldown

#### BUILT TO LAST

- Long life electronics
- 10 Years Design Life – 100,000 hours at max. ambient

\*Contactor not included

## OPERATIONAL INFORMATION

GENERAL			
Voltage	240V~ 50Hz		
Ambient temp.	0 to 40°C		
Class	2		
Wiring	Terminal block (6 mm □)		
IP rating	IP20		
MOUNTING			
2002	35mm DIN rail	2003	Field mounted
EMERGENCY			
Rated duration	90 / 120 min		
Power consumption	2.3 W		
RELAY			
Connection	Screw terminal for 1-4 mm <sup>2</sup> cable		
Type	Non-latching	Load	2A 240V~ max
CONSTRUCTION			
Body	PC		
WEIGHT (NET/GROSS)			
2002	0.2 kg / 6.1 kg	2003	0.69 kg / 8.5 kg

**NOTE:** For more information on the chemical resistance of our polycarbonate or our compliance documentation, please see our website.

## ACCESSORY RANGE

ORDER CODE	DESCRIPTION
6122	Emergency Test Switch RJ45 Interlink cable