


SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

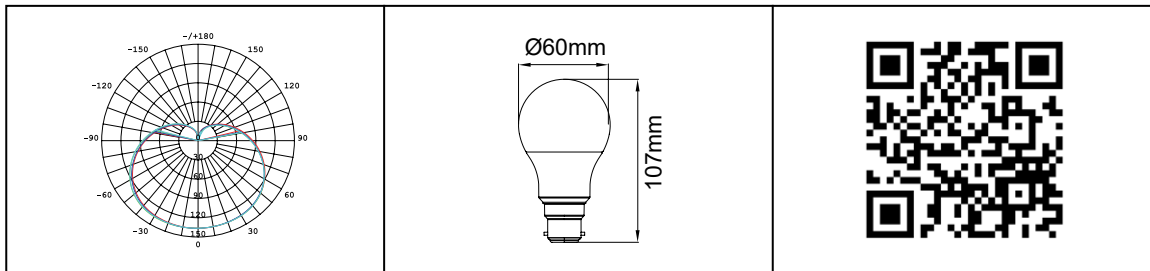


PRODUCT DATA

Order Code	112108C
Voltage	220-240V
Wattage	8.7W
Lumen Output	840Lm
CCT	6500K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	B22
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

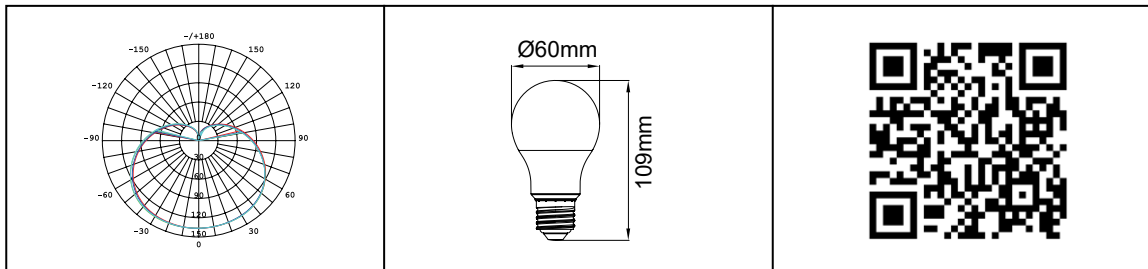


PRODUCT DATA

Order Code	112105C
Voltage	220-240V
Wattage	8.7W
Lumen Output	840Lm
CCT	4000K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	E27
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

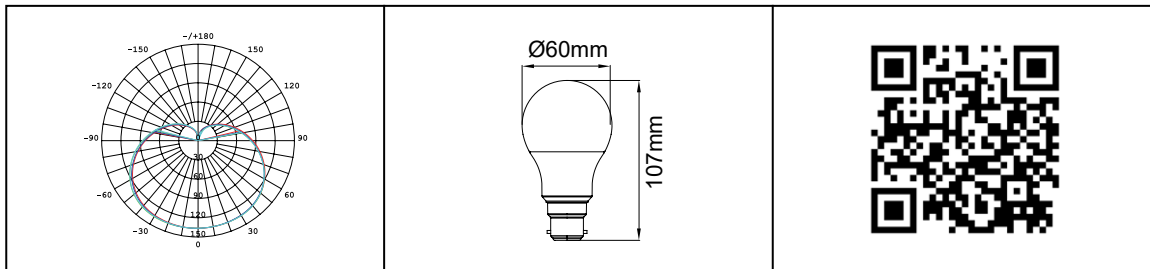


PRODUCT DATA

Order Code	112106C
Voltage	220-240V
Wattage	8.7W
Lumen Output	840Lm
CCT	4000K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	B22
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

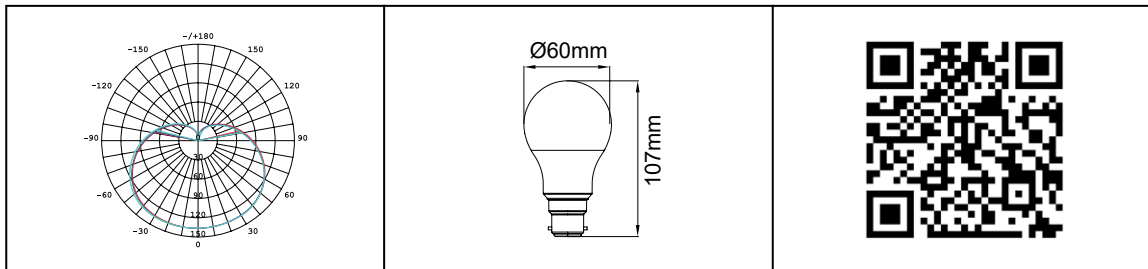


PRODUCT DATA

Order Code	112104C
Voltage	220-240V
Wattage	8.7W
Lumen Output	806Lm
CCT	3000K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	B22
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

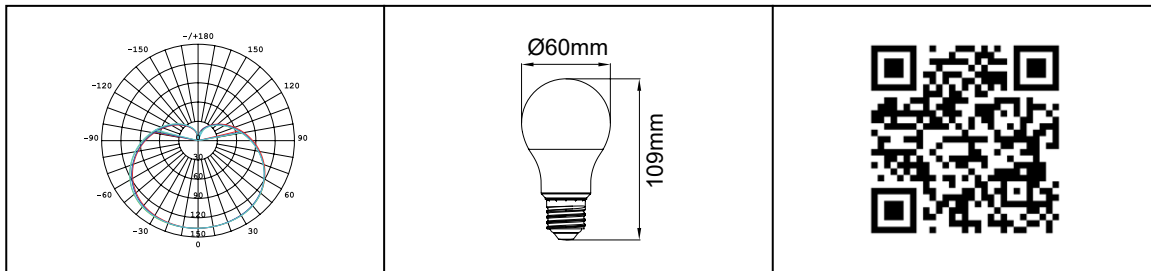


PRODUCT DATA

Order Code	112095C
Voltage	220-240V
Wattage	5.5W
Lumen Output	490Lm
CCT	6500K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	E27
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

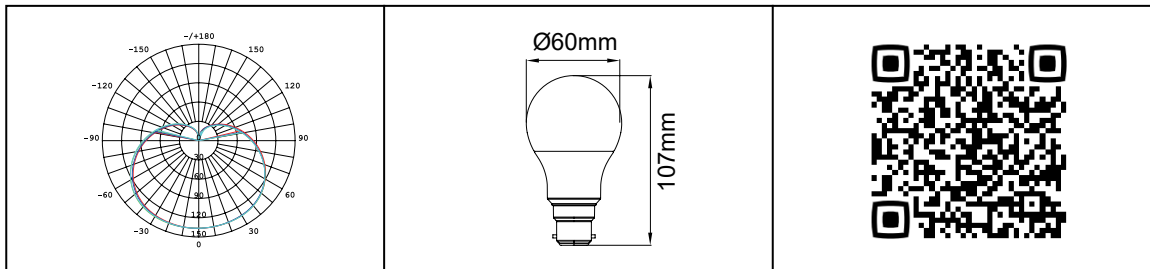


PRODUCT DATA

Order Code	112096C
Voltage	220-240V
Wattage	5.5W
Lumen Output	490Lm
CCT	6500K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	B22
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

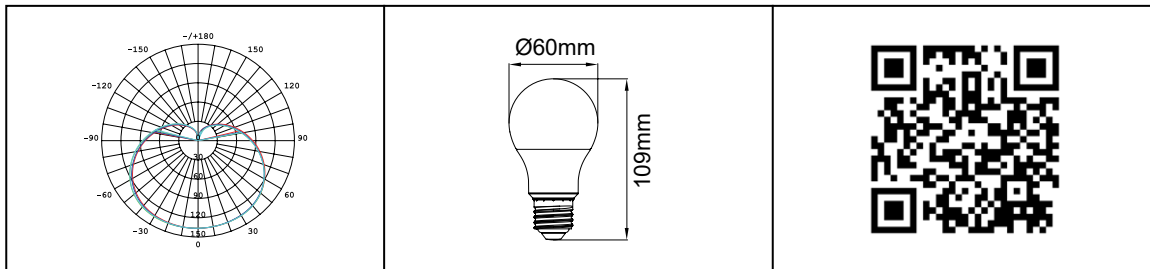


PRODUCT DATA

Order Code	112093C
Voltage	220-240V
Wattage	6W
Lumen Output	490Lm
CCT	4000K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	E27
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years



SUMMARY

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

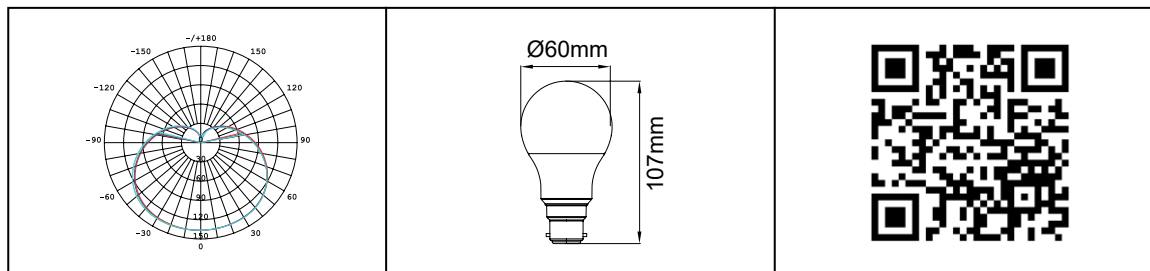

PRODUCT DATA

Order Code	112094C
Voltage	220-240V
Wattage	5.5W
Lumen Output	490Lm
CCT	4000K
CRI Rating	Ra≥80
Beam Angle	240°
Light Source	SMD Chips
Dimmable	Yes. Leading or Trailing Edge, Universal (Refer to Compatibility List)
Cap Type	B22
Construction	Polycarbonate
Fitting Colour	White
PF	0.8
Net Weight (kg)	0.03
Lifetime L70B50	15,000 hours
Warranty	3 years

