

**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



--	--	--	--

**PRODUCT DATA**

Order Code	172048
Voltage	220-240V
Wattage	35W
Lumen Output	3300Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø195mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.30
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



--	--	--	--

**PRODUCT DATA**

Order Code	172047
Voltage	220-240V
Wattage	35W
Lumen Output	3000Lm
CCT	3000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø195mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.30
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



			<p>✓ <b>VEET</b> Approved</p> <p>✓ <b>IPART</b> Approved</p>
--	--	--	--

**PRODUCT DATA**

Order Code	173234
Voltage	220-240V
Wattage	18W
Lumen Output	1800Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø195mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.30
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



			<p>✓ <b>VEET</b> Approved</p> <p>✓ <b>IPART</b> Approved</p>
--	--	--	--


**PRODUCT DATA**

Order Code	173233
Voltage	220-240V
Wattage	18W
Lumen Output	1650Lm
CCT	3000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø195mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.30
Lifetime L70B50	50,000 hours
Warranty	5 years



## SUMMARY

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.

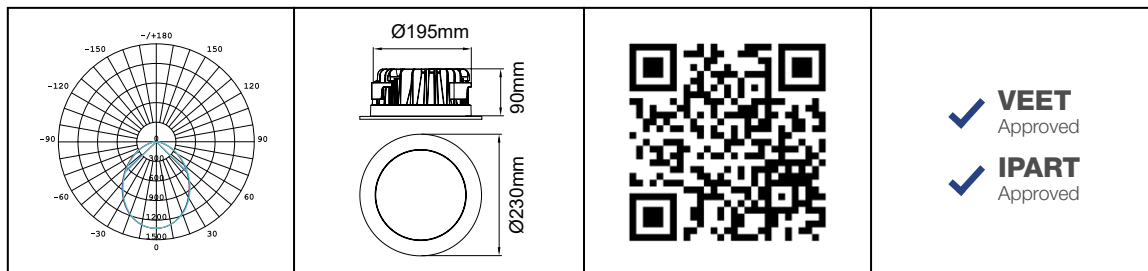

## PRODUCT DATA

Order Code	173224
Voltage	220-240V
Wattage	11W
Lumen Output	1100Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø195mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.30
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



--	--	--	--

**PRODUCT DATA**

Order Code	172040
Voltage	220-240V
Wattage	25W
Lumen Output	2200Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø160mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.97
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



--	--	--	--

**PRODUCT DATA**

Order Code	172039
Voltage	220-240V
Wattage	25W
Lumen Output	2000Lm
CCT	3000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø160mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.97
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



			<p>✓ <b>VEET</b> Approved</p> <p>✓ <b>IPART</b> Approved</p>
--	--	--	--

**PRODUCT DATA**

Order Code	173214
Voltage	220-240V
Wattage	18W
Lumen Output	1800Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø160mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.97
Lifetime L70B50	50,000 hours
Warranty	5 years





**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



			<ul style="list-style-type: none"> <li> <b>VEET</b> Approved</li> <li> <b>IPART</b> Approved</li> </ul>
--	--	--	---

**PRODUCT DATA**

Order Code	173213
Voltage	220-240V
Wattage	18W
Lumen Output	1650Lm
CCT	3000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø160mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.97
Lifetime L70B50	50,000 hours
Warranty	5 years



**SUMMARY**

The Vector is a high performance commercial downlight solution for corporate offices, retail shopping centres, and other service facilities. It's dimmable, rated to IP54 and incorporates high efficiency SMD LED chips. Engineered to be robust, it features a durable metal body and opal polycarbonate diffuser. It also features a remote driver and pre-wired flex and plug for quick and easy installation.



			<p>✓ <b>VEET</b> Approved</p> <p>✓ <b>IPART</b> Approved</p>
--	--	--	--

**PRODUCT DATA**

Order Code	173204
Voltage	220-240V
Wattage	11W
Lumen Output	1100Lm
CCT	4000K
IP Rating	IP54
IC Rating	IC
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	Yes
Connection	1.2 flex & plug
Cutout Size	Ø160mm
Construction	Metal body / opal polycarbonate diffuser
Fitting Colour	White
PF	0.9
Net Weight (kg)	0.97
Lifetime L70B50	50,000 hours
Warranty	5 years

