



IP65 UFO LED HIGH BAYS



Product Features

- Input voltage range: 100-277V AC 50/60Hz
- Constant current LED driver inbuilt
- Housing & heatsink: Graphene
- Diffuser: PC
- LED chips: 3030 LED
- Power factor: ≥ 0.95
- CRI: 70
- Flex & plug: 1500mm
- Ambient temp: -20 to 50°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors



ø320 mm




145 mm

HIB12



ø325 mm

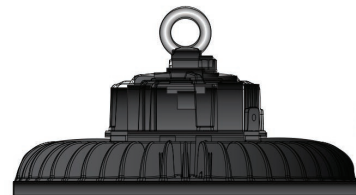

160 mm

HIB13



Part No.	Description	Kelvin	Lumens	Watt	LEDs	Dimensions	Weight	Box	Carton QTY
HIB12	HI BAY UFO LED 150W IP65 90D	5700K	18000lm	150W	180pcs 3030	ø320X145mm	4kg	36x36x15cm	1/1
HIB13	HI BAY UFO LED 200W IP65 90D	5700K	24000lm	200W	240pcs 3030	ø325X160mm	5kg	36x36x15cm	1/1